



Intel® NetStructure™ for DM3 Architecture for CompactPCI on Windows

Configuration Guide

September 2004



INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. Intel products are not intended for use in medical, life saving, or life sustaining applications.

Intel may make changes to specifications and product descriptions at any time, without notice.

This Intel® NetStructure™ for DM3 Architecture for CompactPCI on Windows Configuration Guide as well as the software described in it is furnished under license and may only be used or copied in accordance with the terms of the license. The information in this manual is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by Intel Corporation. Intel Corporation assumes no responsibility or liability for any errors or inaccuracies that may appear in this document or any software that may be provided in association with this document.

Except as permitted by such license, no part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means without express written consent of Intel Corporation.

Copyright © 2002-2004, Intel Corporation

BunnyPeople, Celeron, Chips, Dialogic, EtherExpress, ETOX, FlashFile, i386, i486, i960, iCOMP, InstantIP, Intel, Intel Centrino, Intel Centrino logo, Intel logo, Intel386, Intel486, Intel740, IntelDX2, IntelDX4, IntelSX2, Intel Inside, Intel Inside logo, Intel NetBurst, Intel NetMerge, Intel NetStructure, Intel SingleDriver, Intel SpeedStep, Intel StrataFlash, Intel Xeon, Intel XScale, IPLink, Itanium, MCS, MMX, MMX logo, Optimizer logo, OverDrive, Paragon, PDCharm, Pentium, Pentium II Xeon, Pentium III Xeon, Performance at Your Command, Sound Mark, The Computer Inside., The Journey Inside, VTune, and Xircom are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

* Other names and brands may be claimed as the property of others.

Publication Date: September 2004

Document Number: 05-1746-002

Intel Converged Communications, Inc.
1515 Route 10
Parsippany, NJ 07054

For **Technical Support**, visit the Intel Telecom Support Resources website at:
<http://developer.intel.com/design/telecom/support>

For **Products and Services Information**, visit the Intel Telecom Products website at:
<http://www.intel.com/design/network/products/telecom>

For **Sales Offices** and other contact information, visit the Where to Buy Intel Telecom Products page at:
<http://www.intel.com/buy/wtb/wtb1028.htm>

Contents

	Revision History	8
	About This Publication	9
	Purpose	9
	Intended Audience	9
	How to Use This Publication	9
	Related Information	10
1	Configuration Overview	11
1.1	Major Configuration Steps	11
1.2	The Configuration Process	11
2	Configuration Manager (DCM) Details	13
2.1	Configuration Manager (DCM)	13
2.2	TDM Bus Parameters	16
2.3	Configuration File Sets	17
2.4	Media Loads	19
2.4.1	Features Supported	19
2.4.2	Fixed and Flexible Routing Configurations	22
2.4.3	Media Load Configuration File Sets	23
2.5	Custom Product Configuration Description (PCD) File	25
2.6	CT Bus Clock Fallback	26
2.6.1	Primary Clock Fallback	26
2.6.2	Reference Master Fallback	27
3	CONFIG File Details	29
3.1	CONFIG File Formatting Conventions	29
3.2	CONFIG File Sections	30
3.3	[Encoder] Section	31
3.4	[NFAS] Section	33
3.5	[CAS] Section	34
3.5.1	CAS Signaling Parameters	34
3.5.2	Transition Signal	35
3.5.3	Pulse Signal	37
3.5.4	Train Signal	39
3.5.5	Sequence Signal	41
3.6	[CHP] Section	43
3.7	[TSC] Section	45
3.8	Configuring Trunks for Clear Channel Signaling	46
3.8.1	E1 Configurations	46
3.8.2	T1 Configurations	48
3.8.3	General Considerations	48
4	Configuration Procedures	49
4.1	Assumptions and Prerequisites	49
4.2	Order of Procedures	50

4.3	Starting the Configuration Manager (DCM)	50
4.4	Selecting a Configuration File Set	52
4.5	Setting the TDM Bus Clock Source	54
4.6	Setting the Bus Companding Method for DM3 Configurations	55
4.7	Configuring the Network Interface Connector	56
4.8	Modifying Other DCM Property Sheet Parameters	58
4.9	Setting the FSK Transmit and Receive Signal Levels	59
4.10	Modifying the FCD File Parameters	60
4.10.1	Editing the CONFIG File	60
4.10.2	Generating the FCD File	61
4.11	Initializing the System	61
4.12	Downloading Global Call CDP File Parameters	62
4.13	Reconfiguring the System	62
5	DCM Parameter Reference	65
5.1	Driver Property Sheet	65
5.2	Logical Property Sheet	67
5.3	Misc Property Sheet	68
5.4	Network Property Sheet	72
5.5	Physical Property Sheet	74
5.6	TDM Bus Configuration Property Sheet	78
5.7	Telephony Bus Property Sheet	86
5.8	Trunk Configuration Property Sheet	87
5.9	Version (Version Info.) Property Sheet	88
6	CONFIG File Parameter Reference	91
6.1	[0x44] Parameters	92
6.2	[0x2b] Parameters	92
6.3	[0x2c] Parameters	93
6.4	[encoder] Parameters	97
6.5	[recorder] Parameters	100
6.6	[0x39] Parameters	101
6.7	[0x3b] Parameters	102
6.8	[0x3b.x] Parameters	102
6.9	[lineAdmin.x] Parameters (Digital Voice)	103
6.10	[LineAdmin.x] Parameters (Analog Voice)	109
6.11	[NFAS] Parameters	110
6.12	[NFAS.x] Parameters	111
6.13	[CAS] Parameters for T1 E&M Signals	113
6.14	[CAS] Parameters for T1 Loop Start Signals	115
6.15	[CAS] Parameters for T1 Ground Start Signals	120
6.16	[CAS] User-defined CAS and Tone Signal Parameters	125
6.17	[CAS] User-defined Signals for Selectable Rings Parameters	126
6.18	[CCS] Parameters	128
6.19	[CHP] Parameters	132
6.20	[CHP] T1 Protocol Variant Definitions	134
6.21	[CHP] ISDN Protocol Variant Definitions	150
6.22	[CHP] Analog Voice Variant Definitions	158
6.23	[TSC] Parameters	158
6.24	[TSC] defineBSet Parameters	159

6.24.1 Gain Parameters	165
6.25 [0x1b] Parameters	167
6.26 [0x1d] Parameters	180
Glossary	183
Numerical Index of Parameters	191
Index	193

Figures

1	DCM Main Window	14
2	Misc Property Sheets	15
3	TDM Bus Configuration Property Sheet	16
4	Cluster Configurations for Fixed and Flexible Routing	23
5	Clock Fallback	27
6	AGC Gain vs. Input Average	32
7	Pre-transition ABCD Bit States	35
8	Example of Off-hook Transition Signal (0xC15CA001)	36
9	Example of Wink Pulse Signal (0xC15CA011)	38
10	Example of T1 Loop Start Train Signal (0xC15CA032)	41
11	Example of T1 Loop Start Sequence Signal (0xC15CA033)	43
12	Computer Name Dialog Box	51
13	Assign Firmware File Dialog Box	53
14	Physical Property Sheet	59
15	DTMF Tone Generation	172

Tables

1	Channel Densities by Board and Media Load	21
2	Channel Densities for Station Interface Boards.	22
3	Intel NetStructure High Density Station Interface Country Codes	24

Revision History

This revision history summarizes the changes made in each published version of this document.

Document No.	Publication Date	Description of Revisions
05-1746-002	September 2004	Configuration Manager (DCM) Details chapter: Added note about HDSI boards using country-specific FCD and PCD files. Added Media Load 9f to Media Loads section. Updated Channel Densities by Board and Media Load table to include new boards. Updated Channel Densities for Station Interface Boards table to reflect board changes. Added Intel® NetStructure™ High Density Station Interface Boards section. CONFIG File Details chapter: Added Configuring Trunks for Clear Channel Signaling section. Configuration Procedures chapter: Revised information about Global Call protocols in the Assumptions and Prerequisites section. Added a note in the Starting the Configuration Manager (DCM) section about using remote DCM across firewalls. Added a note in the Setting the TDM Bus Clock Source section regarding boards that are configured for resource only operation. Completely revised the Setting the Bus Companding Method for DM3 Configurations section. Added new Setting the FSK Transmit and Receive Signal Levels section. Revised the Downloading Global Call CDP File Parameters section. CONFIG File Parameter Reference chapter: Added information about new FramingAlgorithm (CRC Checking) parameter. Revised CCS_SWITCH_TYPE (Switch Type) parameter to include additional switch types. Added guidelines to DisconnectTimeout (Disconnect Timeout) parameter.
05-1746-001	November 2002	Initial version of document. Much of the information contained in this document was previously published in the <i>Document Title</i> , document number 05-XXXX-00X.



About This Publication

The following topics provide information about this *Intel® DM3™ Architecture PCI Products on Windows Configuration Guide*:

- [Purpose](#)
- [Intended Audience](#)
- [How to Use This Publication](#)
- [Related Information](#)

Purpose

This guide provides information about configuring Intel® NetStructure™ and Intel® Dialogic® CompactPCI boards that are based on the DM3 architecture in a Windows* environment. Configuration procedures are included, as well as descriptions of configuration files and configuration parameters.

Intended Audience

This information is intended for:

- System, application, and technology developers
- Toolkit vendors
- VAR/system integrators
- System and network administrators

How to Use This Publication

This information is organized as follows:

- [Chapter 1, “Configuration Overview”](#) describes the major configuration steps in the order in which they are performed and provides a brief overview of each aspect of configuring a system containing Intel NetStructure on DM3 architecture boards.
- [Chapter 2, “Configuration Manager \(DCM\) Details”](#) provides details about using the configuration manager (DCM), selecting configuration files and setting configuration parameters.
- [Chapter 3, “CONFIG File Details”](#) provides additional detailed information about specific aspects of configuring a system that relate to the *.config* (CONFIG) files.
- [Chapter 4, “Configuration Procedures”](#) contains detailed procedural information for configuring a system that uses Intel NetStructure on DM3 architecture boards.

- [Chapter 5, “DCM Parameter Reference”](#) describes each parameter associated with the DCM. Included are a description, a list of values, and configuration guidelines.
- [Chapter 6, “CONFIG File Parameter Reference”](#) describes each parameter associated with CONFIG files. Included are a description, a list of values, and configuration guidelines.

Related Information

For additional information related to configuring an Intel® telecom product, see the following:

- For timely information that may affect configuration, see the Release Guide and Release Update. Be sure to check the Release Update for the system release you are using for any updates or corrections to this publication.
- For information about installing the system software, see the systems software installation guide supplied with your release.
- For information about configuring Intel telecom products that use the Springware architecture, see the *Intel® Dialogic® on Springware Architecture Products for PCI on Windows Configuration Guide*.
- For additional information about the configuration manager (DCM), including parameter information, refer to the DCM Online Help supplied with your system release.
- For information about administrative functions relating to the Intel NetStructure boards, see the systems administration guide supplied with your release.
- For information about administrative functions relating to the SNMP agent software, see the *SNMP Agent Software Administration Guide*.
- For information about configuring a third-party board as the TDM bus clock master, refer to the DCM Online Help.
- <http://developer.intel.com/design/telecom/support> (for technical support)
- <http://www.intel.com/design/network/products/telecom> (for product information)

The configuration overview describes the major configuration steps in the order in which they are performed. It also provides a brief overview of each aspect of configuring a system containing Intel® Dialogic® or Intel® NetStructure™ boards that are based on the DM3 Architecture.

- [Major Configuration Steps](#) 11
- [The Configuration Process](#) 11

1.1 Major Configuration Steps

The following major steps are used to configure a system containing an Intel Dialogic or Intel NetStructure on DM3 Architecture board:

1. Starting the configuration manager (DCM)
2. Selecting a configuration file set (optional)
3. Setting the TDM bus clock source (optional)
4. Setting the Bus companding method for DM3 configurations
5. Configuring the Network Interface Connector
6. Modifying other DCM property sheet parameters (optional)
7. Modifying FCD parameters
8. Initializing the system
9. Reconfiguring the system (optional)

Detailed information about the board configuration procedures is provided in [Chapter 4, “Configuration Procedures”](#).

1.2 The Configuration Process

Once the Intel® Dialogic® System Release is installed, you start the configuration process by invoking the configuration manager (DCM). The configuration parameters that you select in the DCM are used by the downloader to initialize the system when the boards are started. For detailed procedures, see [Chapter 4, “Configuration Procedures”](#). An overview of the configuration process is as follows:

Starting the configuration manager (DCM)

Within the DCM, each board has a set of property sheets that display the board's configuration parameters, grouped together on tabs according to the type of board functionality they affect (for example, the Network or Driver tabs). For details about the DCM, including property sheets and parameters, see the DCM Online Help.

Selecting a Configuration File Set

Two configuration files, a Product Configuration Description (PCD) file and a Feature Configuration Description (FCD) file, must be downloaded to each DM3 Architecture board in your system. The purpose of the PCD file is to determine the software components your system will use. The purpose of the FCD file is to adjust the settings of the components that make up each product. Each PCD and FCD file for a configuration has the same name; only the extensions (.pcd and .fcd) differ.

Setting the TDM Bus Clock Source

This step involves using the DCM to access the TDM Bus Configuration property sheet and setting the clock source. The source for clocking depends on the bus mode in which the system runs. The bus mode is determined by the capability of the devices installed in your system. The system automatically determines the bus mode on the basis of installed devices.

Setting the Bus Companding Method for DM3 Configurations

This step involves setting the companding method used by the TDM Bus to agree with that of the boards connected to the network trunks in the system.

Configuring the Network Interface Connector

This step involves using the DCM to access each board's Network property sheet and setting the following parameters: IPAddress, SubnetMask, TargetName, HostName, UserName, and GatewayIPAddress.

Modifying Other DCM Property Sheet Parameters

This step provides instructions for modifying additional DCM parameters. For details about DCM property sheets and associated parameters, refer to the DCM Online Help supplied with your system release.

Modifying FCD File Parameters

It is sometimes necessary to adjust the parameters within the FCD file; this is done by editing the associated CONFIG file. The FCD file, and configuration file sets (.pcd, .fcd, and .config files) are located in *c:\Program Files\Dialogic\Data*. For details about configuration file sets, refer to [Section 2.3, "Configuration File Sets"](#), on page 17. For details about CONFIG files, refer to [Chapter 3, "CONFIG File Details"](#).

Initializing the System

During system initialization, all required firmware for an Intel NetStructure product is downloaded and configured using the identified configuration files and parameter settings.

Reconfiguring a System

If hardware is added or configuration parameters need to be changed, the system must be reconfigured. Parameter changes can be made by invoking the DCM and changing the parameter values as needed. The system is then re-initialized by starting the system service.

Configuration Manager (DCM) Details

2

This chapter provides an overview of the configuration manager (DCM) graphical user interface including information to help you select configuration files.


- Configuration Manager (DCM) 13
- TDM Bus Parameters 16
- Configuration File Sets 17
- Media Loads 19
- Custom Product Configuration Description (PCD) File 25
- CT Bus Clock Fallback 26

2.1 Configuration Manager (DCM)

The configuration manager (DCM) utility is a graphical user interface (GUI) that allows you to customize board, system, and TDM bus configurations. The interface is used to modify parameter settings, select different configuration file sets, start and stop the system, and start and stop individual boards. In addition, the DCM can start the system using the default configuration settings.

The DCM main window contains pull-down menus, shortcut icons, a system window, and a status window. The system window contains a tree structure of the boards installed in your system. The top line of the display, Configured Devices on..., shows the name of the computer you connected to. If you entered an IP address instead of a computer name, the IP address is shown. Refer to Figure 1.

Figure 1. DCM Main Window

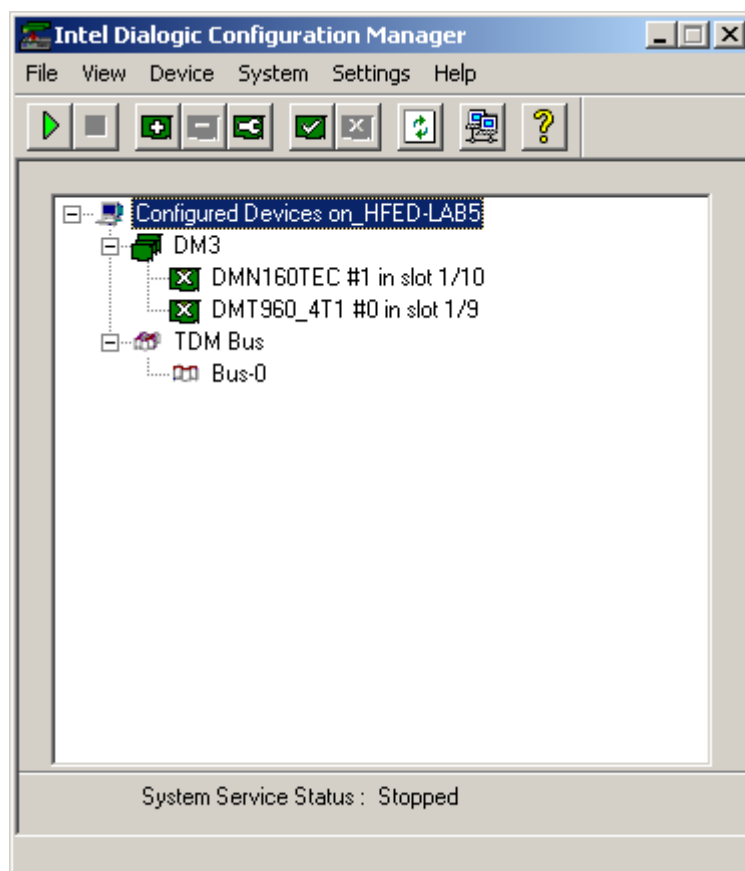


The first level of the tree structure shows the board families or categories of boards currently installed in your system, and also shows the TDM bus, which refers to the resource bus used to carry information between boards. The next level displays the model names of the boards in your system. If the board model names are not displayed, click the family name node(s) to expand the tree structure.

The status window, located at the bottom of the main window, is used to display descriptive text when administrative events are received. For example, it will display “System started” when the system is started and “Device detected” when a device has been detected. The DCM also supports rollover help. When selecting a menu item, or when the mouse is on a particular tool bar icon, a description of the menu item or icon is displayed in the status window.

Within the DCM, each board has a set of property sheets that display a set of board’s configuration parameters. Each property sheet displays a different set of parameters based on the functionality they affect. To access a board’s property sheets, double-click on the board model name in the system window. The Misc property sheet is displayed by default. Refer to Figure 2.

Figure 2. Misc Property Sheets

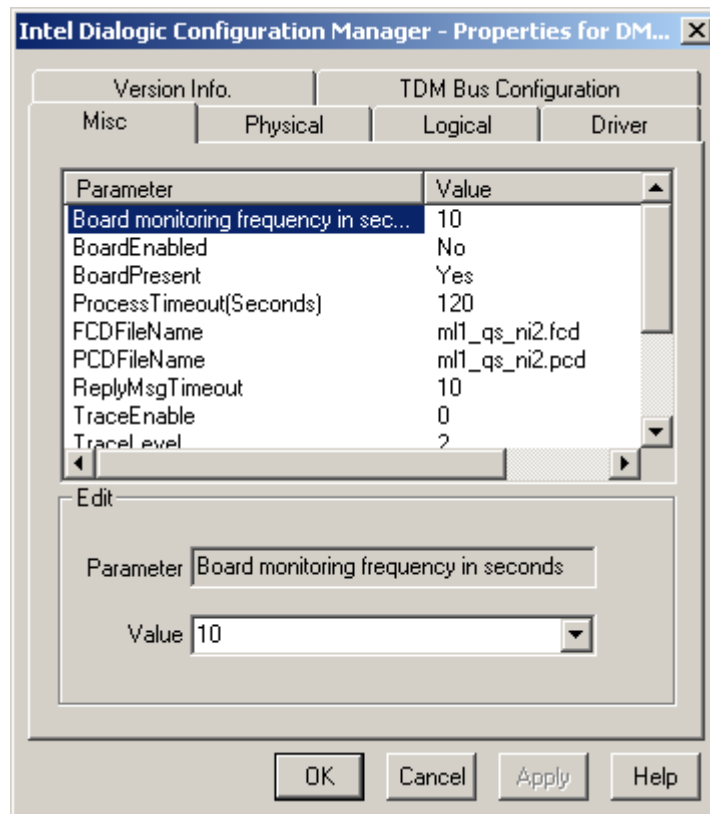

The property sheet and parameters are displayed in the property sheet window. Select a different property sheet by clicking on the appropriate property sheet tab at the top of the window. To return to the DCM main window, click the OK or Cancel button.

Parameter values are modified by selecting the parameter in the property sheet window and selecting (or entering) a new value in the Value window. Select a parameter by clicking on it. For instructions on modifying parameters, refer to [Chapter 4, "Configuration Procedures"](#).


For additional information about the DCM, including pull-down menus, shortcut icons, and parameter reference information, refer to the DCM Online Help supplied with DCM. The DCM Online Help can be accessed from the Help pull-down menu located on the DCM main window or by pressing the F1 key. To access information about a specific parameter within DCM, highlight the parameter and press the F1 key.

2.2 TDM Bus Parameters

TDM Bus parameters are located on the TDM Bus Configuration property sheet. To access this property sheet, expand the TDM Bus device on the DCM main window and double click on the Bus-0 device. The TDM Bus Configuration property sheet is displayed. Refer to Figure 3.

Note: Do not access the TDM Bus Configuration property sheet when configuring a board device (by double clicking on the board model from the DCM main window). When accessing the property sheet in this way, only a subset of parameters are viewable and they are read only.

Figure 3. TDM Bus Configuration Property Sheet

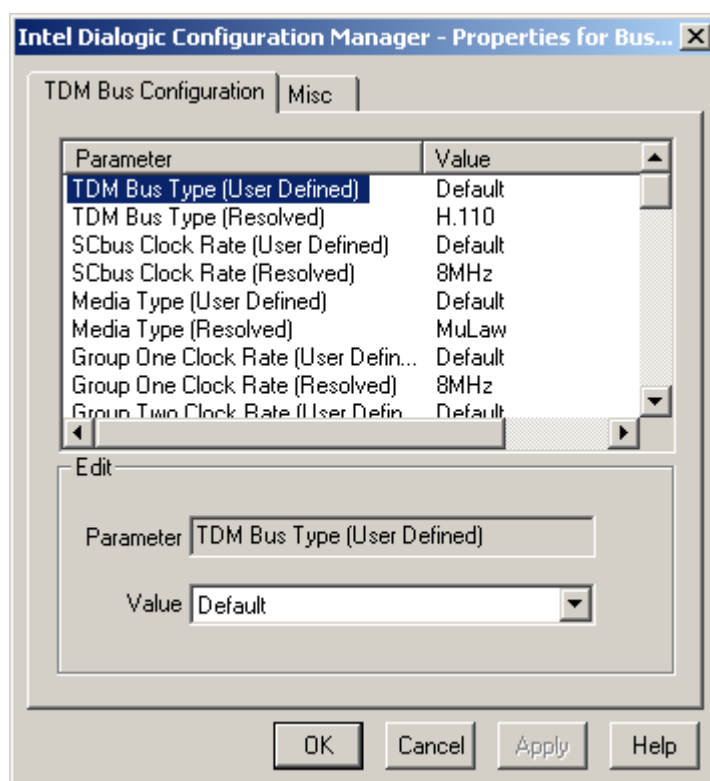

The TDM Bus Configuration parameters come in pairs, one for the User Defined value and one for the Resolved value. The User Defined value is the one that you set to change the value. The Resolved equivalent is the configuration parameter value that has been resolved by the system software. The resolved parameter value may not match the one you set through the User Defined parameter. User Defined and the Resolved equivalent parameters can be set in two ways.

Set the parameter to a value of *Default*

In this case, the value of the User Defined parameter is set to a value of *Default* and the system software determines the value of the parameter. The actual value is then indicated in the parameter's Resolved equivalent.

For example, if the **NETREF One FRU (User Defined)** parameter is set to an H.100/H.110 enabled device, and the **Derive Primary Clock From (User Defined)** parameter is set to a

value of Default, then the **Derive Primary Clock From (Resolved)** parameter will be set to NETREF_1.

Set the parameter to a specific value

In this case, the value of the User Defined parameter is set to a specific value. The system software will attempt to configure the system with the parameter when you click the Apply button on the DCM property sheet. If the value can be applied, the Resolved equivalent will be to the same value as the User Defined parameter. If the system cannot be configured with the User Defined value, the system will select another value and display it in the parameter's resolved equivalent.

For example, if the **Derive Primary Clock From (User Defined)** parameter is set to a value of InternalOscillator, then the **Derive Primary Clock From (Resolved)** parameter will be set to a value of InternalOscillator.

Note: If the system software cannot configure the system with the User Defined value, only the Resolved equivalent will indicate the parameter's true value; the User Defined parameter will remain set to the inapplicable value. Therefore, you must always double-check the resolved equivalent to be sure of the parameter's true value.

2.3 Configuration File Sets

The **PCDFileName** and **FCDFileName** parameters are displayed from the DCM Misc property sheet. These files are part of a *configuration file set*. The set of files associated with a specific configuration all have the same name; only the extensions (.pcd, .fcd and .config) differ. A set of these files with the same name are used for a specific board type. The board type can include a single board or a group of similar boards. Depending on the board type and the protocol that the board will use, a specific FCD and PCD file are downloaded to that board as identified in the DCM. If the FCD file needs to be modified, the CONFIG file in that same set is used.

The files associated with configuration file sets include:

CONFIG File

The CONFIG file (.config), located in \Program Files\Dialogic\Data, contains the modifiable parameter settings used to configure board components. After parameters are modified in the CONFIG file, the *fcdgen* utility is used to generate a modified FCD file. For additional information about CONFIG files, see [Chapter 3, "CONFIG File Details"](#).

FCD File

An FCD file (.fcd), located in \Program Files\Dialogic\Data, must be downloaded to each board in the system. The purpose of the FCD file is to adjust the settings of the components that make up each product. For example, the FCD file may contain instructions to set certain

country codes, or may send messages that configure the Telephony Service Provider (TSP) component to operate with a particular network protocol.

The FCD file defines a simple message form that the downloader parses and sends to a specific component. These parameters are sent to a component within a message and can be thought of as configurable *features* of a component.

Note: The FCD file should not be edited directly. If parameters require modification, the changes are made by editing the associated CONFIG file. Also, an FCD file should not be copied from another directory to the *Program Files\Dialogic\data* directory.

Note: HDSI boards use country-specific FCD and PCD files. Depending on the FCD/PCD files selected for an HDSI board, the PCM encoding method will be set to either A law or Mu law, based on the default value for that country. If this value is not the same as the TDM Bus Media Type parameter setting, the HDSI board will fail to download. PCD File

A PCD file (.pcd), located in *\Program Files\Dialogic\Data*, must be downloaded to each board in the system. The purpose of the PCD file is to determine the software components your system will use. It defines the product by mapping download object files to specific processors, configuring the kernel for each processor and setting the number of component instances to run on each processor.

Note: The PCD file should not be modified by the user.

Custom PCD

The Intel® NetStructure™ DMN160TEC and DMT160TEC boards support up to 16 trunks that can be independently configured in groups of four as being either T-1 or E-1 trunks. Additionally, each trunk within a group can be configured to run a different protocol. This is done by creating custom PCD file (and associated custom FCD and custom CONFIG files). The custom PCD file is downloaded to the board when the system is started. The custom file can assign separate configurations to each of the 16 Intel® NetStructure DMN160TEC or DMT160TEC trunks. For a detailed discussion about custom files, see [Section 2.5, “Custom Product Configuration Description \(PCD\) File”](#), on page 25.

fcngen

The *fcngen* utility, located in *\Program Files\Dialogic\Bin*, is used when modifying configuration parameters. The *fcngen* utility uses the CONFIG file to generate an updated FCD file. After the FCD file is updated, it is downloaded to the board. For a detailed procedure, see [Section 4.10.2, “Generating the FCD File”](#), on page 61.

An example of a configuration file set for a DM/V960A-4T1-PCI board using the 4ess protocol is as follows:

- *ml2_qsa_4ess.config*
- *ml2_qsa_4ess.fcd*
- *ml2_qsa_4ess.pcd*

An example of a (non-custom) configuration file set for a DMN160TEC board using the 4ess protocol is as follows:

- *dti16_isdn_4ess.config*
- *dti16_isdn_4ess.fcd*
- *dti16_isdn_4ess.pcd*

2.4 Media Loads

Media loads are pre-defined sets of features supported by DM3 boards. A media load consists of a configuration file set (PCD, FCD, and CONFIG files) and an associated firmware load that are downloaded to each board. Universal media loads simultaneously support voice, fax, and conferencing resources.

- [Features Supported 19](#)
- [Fixed and Flexible Routing Configurations. 22](#)
- [Media Load Configuration File Sets 23](#)

2.4.1 Features Supported

The media loads, or feature sets, are numbered (for example, 1, 2, 9b) for identification purposes. Intel NetStructure DM/V boards are supported by media loads 1 through 10. Intel NetStructure DM/IP boards are supported by media loads 2 and 11. The features supported by each media load is as follows:

Media Load 1 – Basic Voice

- Provides play, record, digit generation, and digit detection
- All half duplex voice operations
- Supports the following coders:
 - 64 kbps and 48 kbps G.711 PCM VOX and WAV
 - 24 kbps & 32 kbps OKI ADPCM VOX and WAV
 - 64/88/128/176 kbps Linear PCM VOX and WAV
- Speed control on 8 kHz coders
- Volume control
- Cached prompts
- GTG/GTD
- Call progress analysis
- Transaction record
 - Note:* Density limitations may exist for transaction record. Check the specific media load for details.
- All call control features when using a board with a network interface

Media Load 1b – Basic Voice Plus

- All Basic Voice features (see Media Load 1)
- ADSI/2-way FSK/ETSI-FSK

Media Load 2 – Enhanced Voice

- All Basic Voice features (see Media Load 1)
- Continuous speech processing (CSP) (Does not apply to DM/IP Series boards)

- Enhanced coders:
 - G.726 at 16 kbps, 24 kbps, 32 kbps, and 40 kbps
 - GSM (TIPHON* and Microsoft*)
 - IMA ADPCM
 - TrueSpeech
- Silence Compressed Record (G.711, OKI ADPCM, Linear 8kHz, and G.726)
- IP transcoders (Intel NetStructure DM/IP Series boards only)
 - G.711: 1 frame/packet at 10, 20, or 30 ms (A-law or mu-law)
 - G.723: 1, 2, or 3 frames/packet at 30 ms (silence compression with VAD and CNG)
 - G.729: 1, 2, 3, or 4 frames/packet at 10 ms (silence compression with VAD and CNG)
 - GSM: 1, 2, or 3 frames/packet at 20 ms (silence compression with VAD and CNG)

Media Load 2c – Enhanced Echo Cancellation

- All Enhanced Voice features (see Media Load 2)
- Enhanced Echo Cancellation (in addition to standard 16 ms tap length, provides selectable tap lengths of 32 ms and 64 ms)
- CSP streaming to CT Bus

Media Load 5 – Fax

- All Enhanced Voice Features (see Media Load 2)
- V.17 Fax

Media Load 9b – Conferencing Only (Rich Conferencing)

- Traditional DCB conferencing plus echo cancellation:
 - No voice channels
 - Conferencing
 - Signal detection
 - Tone clamping
 - Tone generation
 - Echo cancellation (16 ms)

Media Load 9c – Conferencing Only (No Signal Detection, No Tone Clamping, No Tone Generation, No Echo Cancellation)

Media Load 9f – Conferencing and Fax

- Conferencing (Rich Conferencing)
- V.17 Fax

Media Load 10 – Enhanced Voice Plus Conferencing

- All Enhanced Voice features (see Media Load 2)
- Conferencing (Rich Conferencing)

Media Load 11 – Enhanced Voice Plus Conferencing (Intel NetStructure DM/IP Series boards only)

- All Enhanced Voice features (see Media Load 2)

Note: Enhanced voice is not supported on the DM/IP601-2E1-100cPCI board. For this board, only basic coders are supported.

- Conferencing

For a list of board densities based on media load configuration, refer to Table 1 and Table 2.

Table 1. Channel Densities by Board and Media Load

Board	Media Loads									
	Voice				Voice and Fax	Conferencing		Fax and Conferencing	IP, Voice, and Conferencing	
	1	1b	2	2c	5	9b	9c	9f	10	11‡
DM/V480-4T1-cPCI	48 V †									
DM/V600-4E1-cPCI	60 V †									
DM/V960-4T1-cPCI	96 V									
DM/V1200-4E1-cPCI	120 V									
DM/V480A-2T1-cPCI DM/V480A-2T1-CR2		48 V	48 V	48 V					48 C 60 V	
DM/V600A-2E1-cPCI DM/V600A-2E1-CR2		60 V	60 V	60 V					60 C 60 V	
DM/V960A-4T1-cPCI DM/V960A-4T1-CR2		96 V	96 V			120 C				
DM/V1200A-4E1-cPCI DM/V1200A-4E1-CR2		120 V	120 V			120 C				
DM/V2400A-cPCI		240 V		120V	120 V 30 F	120 C	240 C	15 F 120 C	120 C 60 V	
DM/IP481-2T1-100cPCI			48 IP 48 V							48 IP 48 V 60 C
DM/IP601-2E1-100cPCI			60 IP 60 V							60 IP 60 V 60 C
DM/IP601-100cPCI			60 IP 60 V							60 IP 60 V 60 C
† For the DM/V480-4T1-cPCI board, this media load has full 4 span (96 channels) density of tone detection and generation. For the DM/V600-4E1-cPCI board, this media load has full 4 span (120 channels) density of tone detection and generation. ‡ Media load 11 only applies to Intel NetStructure DM/IP Series single-span boards.										

Table 2. Channel Densities for Station Interface Boards

Board	Media Load	Stations‡	FSK
HDSI/480-PCI	1	48	48
HDSI/720-PCI	1	72	72
HDSI/960-PCI	1	96	96
HDSI/1200-PCI	1	120	120
‡ Reflects number of voice resources			

2.4.2 Fixed and Flexible Routing Configurations

There are two types of routing configurations: fixed and flexible. All media loads support flexible routing. Non-media load configurations support fixed routing.

Fixed routing configuration


With fixed routing, the resource devices (voice/fax) and network interface devices are permanently coupled together in a fixed configuration. Only the network interface device has access to the TDM bus. For example, on a DM/V960-4T1 board, each voice resource channel device is permanently routed to a corresponding network interface device on the same physical board. The routing of these resource and network interface devices is predefined and static. The resource device also does not have access to the TDM bus and so cannot be routed independently on the TDM bus. No off-board sharing or exporting of voice/fax resources is allowed.

Flexible routing configuration

With flexible routing, the resource devices (voice/fax) and network interface devices are independent, which allows exporting and sharing of the resources. All resources have access to the TDM bus. For example, on a DM/V960-4T1 board, each voice resource channel device and each network interface time slot device can be independently routed on the TDM bus.

These routing configurations are also referred to as cluster configurations. The fixed routing configuration is one that uses permanently coupled resources, while the flexible routing configuration uses independent resources. From a DM3 perspective, the fixed routing cluster is restricted by its coupled resources and the flexible routing cluster allows more freedom by nature of its independent resources, as shown in Figure 4.

Figure 4. Cluster Configurations for Fixed and Flexible Routing

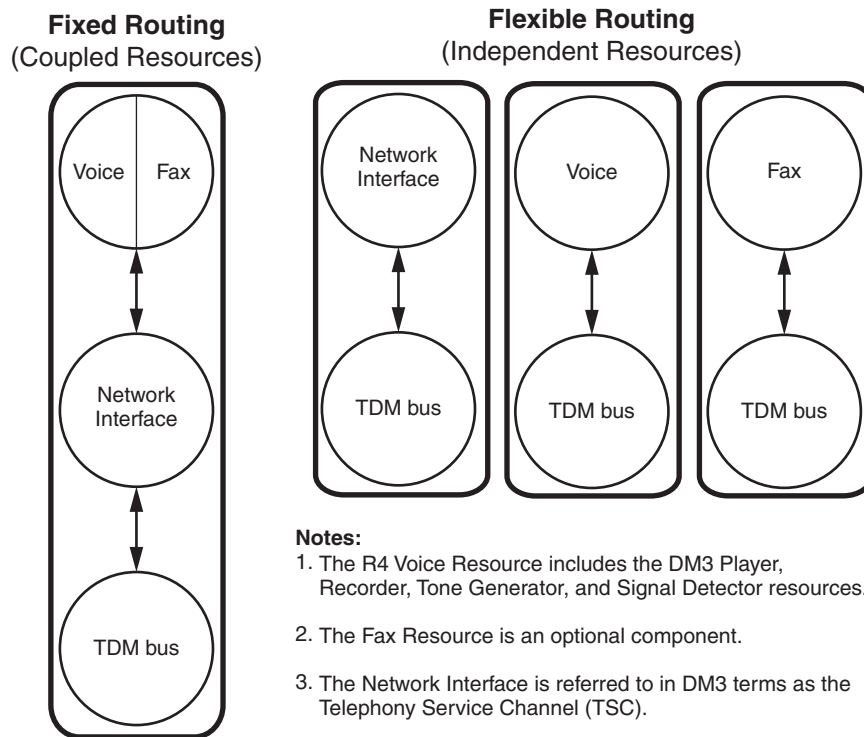

The following restrictions apply when using fixed routing configuration:

- TDM bus voice resource routing is not supported
- TDM bus fax resource routing restricted
- Voice, Fax, and Global Call resource/device management restricted

2.4.3 Media Load Configuration File Sets

For most products, the file names of the configuration file set reflects the media load supported. If a media load number (*mlx*) is not present in the file name, no media load is supported for that configuration. The following sections provide information about the media load configuration file sets for the boards that use media loads:

- [Intel® NetStructure™ DM/V and DM/V-A Series Boards](#)
- [Intel® NetStructure™ DM/IP Series Boards](#)
- [Intel® NetStructure™ High Density Station Interface Boards](#)

2.4.3.1 Intel® NetStructure™ DM/V and DM/V-A Series Boards

Media load configuration files for DM/V Voice and DM/V-A Series boards are identified by having an *mlx*, where *x* represents the specific media load. Configuration files that do not begin with a *mlx*

prefix (that is, which begin with 4x2, qs, or qsa, for example) do not support media loads and do not support flexible routing.

Media loads support flexible routing and the configuration file sets are customized by feature set, as well as by protocol. For example, on a DM/V960-4T1 board using the T1 ISDN 4ESS protocol:

- *qs_isdn_4ess.pcd* supports a fixed routing configuration.
- *ml1_qs_4ess.pcd* supports media load 1 and a flexible routing configuration.

2.4.3.2 Intel® NetStructure™ DM/IP Series Boards

Configuration files for DM/IP boards are identified by having an *ipvs* prefix and an *evr* (exportable voice resource) in the filename. Exportable voice resource denotes flexible routing. Fixed routing is not supported on these boards.

The configuration files are also customized by feature set, as well as by protocol. For example, on a DM/IP481-2T1-cPCI-100BT board, using T1 ISDN 4ESS protocol:

- *ipvs_evr_2isdn_4ess_311c.pcd* supports media load 2.
- *ipvs_evr_2isdn_4ess_ml11_311c.pcd* supports media load 11.

2.4.3.3 Intel® NetStructure™ High Density Station Interface Boards

Configuration files for Intel NetStructure High Density Station Interface boards are prefaced with a country code. This code represents the country-specific protocol that is supported. For example, the HDSI CONFIG file for Austria E1 (code = at), supporting 48 channels is:

- *at_hdsi_48_play_rec.config*

Refer to Table 3 for a list of country codes for all supported countries.

Table 3. Intel NetStructure High Density Station Interface Country Codes

Code	Country
at	Austria
au	Australia
be	Belgium
ch	Switzerland
de	Germany
dk	Denmark
es	Spain
fr	France
gb	United Kingdom
hk	Hong Kong
ie	Ireland
it	Italy

Table 3. Intel NetStructure High Density Station Interface Country Codes (Continued)

Code	Country
jp	Japan
lu	Luxembourg
mx	Mexico
my	Malaysia
nl	Netherlands
no	Norway
nz	New Zealand
pt	Portugal
se	Sweden
sg	Singapore
us	United States
za	South Africa

2.5 Custom Product Configuration Description (PCD) File

Normally, a PCD file configures all trunks on a board as a single line type (T-1 or E-1) and a single protocol (for example, 4ESS, DMS, or NET5). The DMN160TEC and DMT160TEC boards support a total of 16 trunks that can be configured in groups of four as either T-1 or E-1 interfaces. In addition, each trunk within a group can be configured to use a different protocol supported by the trunk type assigned to the group. The trunks are grouped as follows:

- trunks 1 to 4
- trunks 5 to 8
- trunks 9 to 12
- trunks 13 to 16

Each trunk in a group can be configured to use a different ISDN protocol that supports the line type for that group (T-1 or E-1). This is accomplished through the creation of a custom PCD file. The custom PCD file is created using the DCM *Trunk Configuration* property sheet. When creating a custom PCD file, a custom FCD file and a custom CONFIG file are also created. For additional information about configuring DMN160TEC and DMT160TEC trunks, see [Section 5.8, “Trunk Configuration Property Sheet”](#), on page 87.

2.6 CT Bus Clock Fallback

The system provides clock fallback to maintain timing in the event that the current clock source fails. The following sections provide reference information about the two types of clock fallback:


- [Primary Clock Fallback](#)
- [Reference Master Fallback](#)

2.6.1 Primary Clock Fallback

For the following discussion, refer to [Figure 5, “Clock Fallback”](#), on page 27 for an illustration of the CT Bus clocking concepts.

The Primary Clock Master is a device (board) that provides timing to all other devices attached to the bus. The Primary Clock Master drives bit and framing clocks for all of the other boards (slaves) in the system via CT Bus Line A or Line B. This bus clocking is synchronized to either the board's internal oscillator or, preferably, to the NetRef1 line which provides a timing reference (8 kHz) derived from a T1 or E1 interface signal.

In addition, a Secondary Clock Master can be defined as a backup for the same purpose. This board, like the Primary Clock Master, is capable of driving the bit and framing clocks for all of the other boards in the system. The Secondary Clock Master uses whichever CT Bus line (A or B) is not defined for the Primary Master Clock. If the system senses a failure of the Primary Clock Master, the system will cause the clock source to fall back to the Secondary Clock Master. The Secondary Clock Master, like the primary, also provides clocking that is synchronized to either the board's internal oscillator or, preferably, to the NetRef1 line.

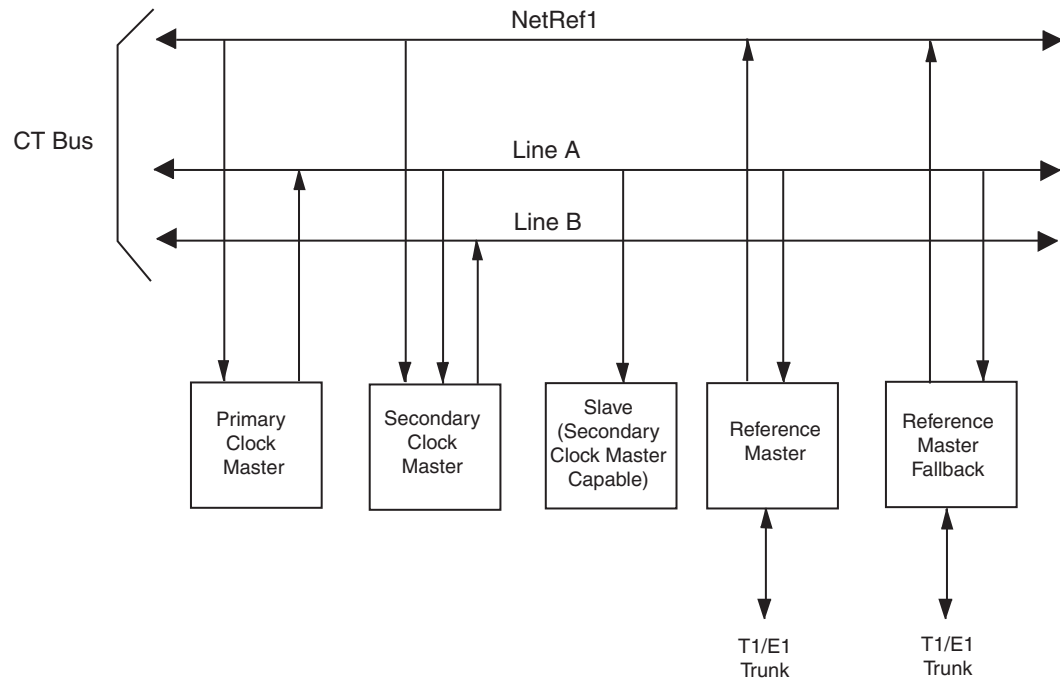Figure 5. Clock Fallback


Both the Primary and Secondary Clock Masters are defined by the user. If, however, the Secondary Clock Master has failed and the system senses that this is no longer a reliable clock source, the system can transfer the role of Clock Master to yet another board in the system if that board meets the criteria for a clock master. The board selected by the system as the new Clock Master will provide clocking to the system via the same line (A or B) that the Secondary Clock Master used to provide the clocking.

Also, if no Secondary Clock Master has been defined, and the Primary Clock Master fails, the system will automatically choose another board to be Primary Clock Master, if another board in the system is clock master capable.

2.6.2 Reference Master Fallback

In addition to supporting clock master fallback, the system also provides for fallback in the event the board designated as the Reference Master fails. The failure could be caused by degradation of the board itself, or by a degradation of the T1 or E1 trunk from which the reference signal is derived. A second line on the same board or a line on a second board can be assigned as the Reference Master Fallback board (the user must specify the trunk to be used on the Reference Master Fallback board). In the event that the Network Reference board stops providing a reliable signal to drive the NetRef1 line, the system will switch to the Reference Master Fallback board for this purpose.



This chapter provides background information about CONFIG (.*config*) files including directory location and formatting conventions. This chapter also includes information to help you set the parameters contained in the CONFIG file including the following:

- [CONFIG File Formatting Conventions](#) 29
- [CONFIG File Sections](#) 30
- [\[Encoder\] Section](#) 31
- [\[NFAS\] Section](#) 33
- [\[CAS\] Section](#) 34
- [\[CHP\] Section](#) 43
- [\[TSC\] Section](#) 45
- [Configuring Trunks for Clear Channel Signaling](#) 46

3.1 CONFIG File Formatting Conventions

The CONFIG (.*config*) files, located in *Dialogic\Data*, are ASCII files that contain component configuration information required by Intel® telecom boards. When manually editing the CONFIG file, use the following formatting conventions:

Parameters

Many CONFIG file parameters use the SetParm command to assign values. The format is SetParm followed by an equal sign, followed by the hexadecimal parameter number, followed by a comma, followed by the parameter value:

```
SetParm=parameter-number, parameter-value
```

Additional commands used to set parameters include:

- AddNFASInterface (see “[GroupID \(Group Identifier\)](#)”, on page 112)
- transition, pulse, train, and sequence (see [Section 3.5, “\[CAS\] Section](#)”, on page 34)
- Variant (see [Section 3.6, “\[CHP\] Section](#)”, on page 43)
- defineBSet (see [Section 3.7, “\[TSC\] Section](#)”, on page 45).

Sections

Configuration parameters are grouped into sections. In general, each section begins with a section name enclosed in square brackets. (The section names are listed and described in

[Section 3.2, “CONFIG File Sections”](#), on page 30.) The parameters for the section immediately follow the section name.

[section-name]

Some sections group parameters that apply to a specific network interface (trunk) or channel (line). These section names are followed by a period (.) and the trunk number. For sections that group parameters like this, there is a separate section for each trunk.

[section-name.trunk-number]

Comments

Comments can be added to the CONFIG file. If you use an exclamation point (!) anywhere on a line, all text to the right of the exclamation point until the end of the line is treated as a comment (ignored).

! comment

For a list of CONFIG file parameters, see [Chapter 6, “CONFIG File Parameter Reference”](#).

3.2 CONFIG File Sections

CONFIG file parameters are grouped in sections based on the board components and subcomponents being configured. Modifiable CONFIG file sections include the following:

[0x44]

Defines the companding method (along with the [TSC] **encoding** parameter 0x1209) for Intel® NetStructure™ DI Series Station Interface boards. This section only applies to DI Series boards.

[0x2b]

Defines parameter used to enable streaming of echo cancellation data over the TDM bus in Continuous Speech Processing (CSP) applications. This section is only applicable in media load 2c CONFIG files.

[0x2c]

Defines enhanced echo cancellation parameters used to set the tail length, or tap length, used in Continuous Speech Processing (CSP) applications. This section also defines the parameters associated with Silence Compressed Streaming (SCS).

[encoder]

Defines parameters used during the encoding process that utilize the Automatic Gain Control (AGC) and Silence Compressed Record (SCR) algorithms. For details about setting algorithm parameters, see [Section 3.3, “\[Encoder\] Section”](#), on page 31.

[recorder]

Defines recording parameters used during the recording process including the enabling and disabling of AGC and SCR on a per board basis.

[0x39]

Defines conferencing parameters applicable to all conferencing lines on a board.

[0x3b]

Defines conferencing parameters applicable to conferencing lines on a board. The [0x3b] parameters apply to all conferencing lines on the board. The [0x3b.x] parameters apply specifically to trunk x on the board.

[lineAdmin.x]

Defines line device parameters applicable to each line on a board.

[NFAS] and [NFAS.x]

Non-Facility Associated Signaling (NFAS). Defines the Primary D channel and NFAS trunk parameters. The [NFAS] section defines the number of NFAS groups on a board. The [NFAS.x] sections define the parameters specific to each group. For details about setting the NFAS parameters, see [Section 3.4, “\[NFAS\] Section”](#), on page 33.

[CAS]

Channel Associated Signaling (CAS). Defines the signaling types used by a CAS protocol and the [TSC] section assigns these signaling type to voice channels. For details about the different CAS signals, see [Section 3.5, “\[CAS\] Section”](#), on page 34.

[CCS] and [CCS.x]

Common Channel Signaling (CCS). Defines common channel signaling parameters applicable to technologies such as ISDN. The [CCS] section defines board-based parameters and the [CCS.x] section defines the line-based parameters.

[CHP]

Channel Protocol (CHP). Defines the telephony communication protocol that is used on each network interface using the Variant Define *n* command. For details about setting [CHP] parameters using the Variant Define *n* command, see [Section 3.6, “\[CHP\] Section”](#), on page 43.

[TSC]

Telephony Service Component (TSC). Defines sets of B channels and associated characteristics using the defineBSet command. For details about setting [TSC] parameters using the defineBSet command, see [Section 3.7, “\[TSC\] Section”](#), on page 45.

[0x1b]

Defines DM/IP technology parameters relating to echo cancellation, packet loss recovery, volume controls to network output, and gain controls applied to data received from the network.

3.3 **[Encoder] Section**

The encoder parameters are used to perform an encoding process on a media stream. Automatic Gain Control (AGC) and Silence Compressed Record (SCR) are two algorithms used as part of this encoding process.


The AGC is an algorithm for normalizing an input signal to a target record level. The target record level should be chosen to be the optimum level for an encoder and, at the same time, produce a suitable playback level for a listener.

The AGC algorithm is controlled by three parameters: **PrmAGCk**, **PrmAGCmax_gain**, and **PrmAGClow_threshold**. **PrmAGCk** is a target output level. **PrmAGCmax_gain** is the a limit on

the possible maximum gain. The ratio, **PrmAGCk/PrmAGCmax_gain** gives the AGC High Threshold value. This is the threshold for which inputs above it produce output level at the **PrmAGCk** level and inputs with a level below it produce outputs which linearly decrease with the input level. The **PrmAGClow_threshold**, on the other hand, is an upper limit for a noise level estimate. That is, a signal with a level above the **PrmAGClow_threshold** is declared speech, independently of whether it is or not. Below the threshold, the AGC algorithm itself tries to discriminate between voiced and unvoiced signals.

Figure 6 is a graphical representation of the AGC gain relative to input average.

Figure 6. AGC Gain vs. Input Average

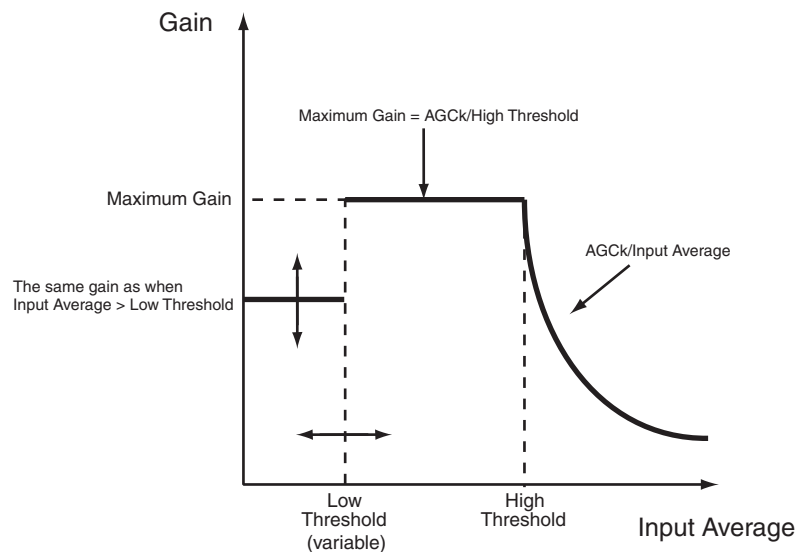

The SCR algorithm operates on 1 millisecond blocks of speech and uses a twofold approach to determine whether a sample is speech or silence. Two Probability of Speech values are calculated using a Zero Crossing algorithm and an Energy Detection algorithm. These values are combined to calculate a Combined Probability of Speech.

The Zero Crossing algorithm counts the number of times a sample block crosses a zero line, thus establishing a rough “average frequency” for the sample. If the count for the sample falls within a predetermined range, the sample is considered speech.

The Energy Detection algorithm allows user input at the component level of a background noise threshold range via the **SCR_LO_THR** and **SCR_HI_THR** parameters. Signals above the high threshold are declared speech and signals below the low threshold are declared silence.

SCR declares speech or silence for the current 1 millisecond sample based on the following:

- previous 1 millisecond sample declaration (speech or silence)
- Combined Probability of Speech in relation to the Speech Probability Threshold (**SCR_PR_SP**)

- Combined Probability of Speech in relation to the Silence Probability Threshold (**SCR_PR_SIL**)
- Trailing Silence (**SCR_T**) relative to Silence Duration

The logic is as follows:

Previous sample = Silence

If Combined Probability of Speech > Speech Probability Threshold
 then Declare Speech
 else Declare Silence

Previous sample = Speech

If Combined Probability of Speech > Silence Probability Threshold
 then Declare Speech
 else If Silence Duration < Trailing Silence
 then Declare Speech
 else Declare Silence

3.4 [NFAS] Section

Non-Facility-Associated Signaling (NFAS) uses a single ISDN PRI D channel to provide signaling and control for up to 10 ISDN PRI lines. Normally, on an ISDN PRI line, one D channel is used for signaling and 23 B channels (bearer channels) are used for transferring information. In an NFAS configuration, therefore, one D channel can support the signaling and control for up to 239 B channels. The trunk that provides the signaling is called the primary D channel. The trunks that use all 24 channels as B channels are called NFAS trunks.

- Notes:**
1. For a board containing multiple primary D channels, the maximum number of trunks supported by each NFAS group on that board is reduced. This is due to the additional message load on the board's CPU.
 2. NFAS is supported on only the ISDN NI-2, 4ESS, 5ESS, and DMS protocols.
 3. NFAS D channel backup (DCBU) is supported only on ISDN NI-2 protocol.
 4. When NFAS is used, the **SignalingType** parameter in the [lineAdmin] section of the CONFIG file must be modified. For details about this parameter modification, see [Section 6.9, "\[lineAdmin.x\] Parameters \(Digital Voice\)"](#), on page 103.

The CONFIG file contains an [NFAS] section and multiple [NFAS.x] sections. The [NFAS] section defines the number of NFAS instances created, that is, defines the number of NFAS groups. For each NFAS group, there is an [NFAS.x] section in the CONFIG file. For example, if there are two NFAS groups defined in the [NFAS] section, there will be two [NFAS.x] sections, [NFAS.1] and [NFAS.2].

NFAS parameters are modified by editing the respective lines in the [NFAS] and [NFAS.x] sections of the CONFIG file. For example, to increase the number of NFAS groups per board from one to

four, change the value of **NFAS_INSTANCE_MAP** (parameter = 0x3E02) from a value of 1 (one group per board) to a binary value of 1111 (four NFAS groups per board) represented by 0xF.

Following is an excerpt from the [NFAS] section of a CONFIG file that illustrates that part of the file before and after editing.

Before editing:

```
[NFAS]
SetParm=0x3e02,0x1 !INSTANCE MAP, default = 1 (1 group/board)
```

After editing:

```
[NFAS]
SetParm=0x3e02,0xf !INSTANCE MAP - 4 NFAS groups/board
```

3.5 [CAS] Section

Information about the [CAS] section of the CONFIG file is given in the following sections:

- [CAS Signaling Parameters](#)
- [Transition Signal](#)
- [Pulse Signal](#)
- [Train Signal](#)
- [Sequence Signal](#)

3.5.1 CAS Signaling Parameters

The Channel Associated Signaling (CAS) component is responsible for managing the generation and detection of digital line signaling functions required to manage voice channels. Each CAS instance corresponds to the CHP instance of the same voice channel.

The [CAS] section of the CONFIG file is a subcomponent of the [TSC] section. Commands in the [CAS] section define the signaling types used by a CAS protocol, and the [TSC] section assigns these signaling type to voice channels. For example, many CAS protocols use off-hook and wink signals, which can be defined in this section. For an explanation of the [TSC] section of the CONFIG file, see [Section 3.7, “\[TSC\] Section”](#), on page 45.

Note: The CAS signaling parameters should only be modified by experienced users if the default settings do not match what the line carrier or PBX is sending or expecting for the line protocol configuration running on the card.

CAS parameters are defined using the following signal definition types:

[Transition Signal](#)

This signaling state changes from the current signaling state to a new signaling state.

Pulse Signal

This signaling state changes from the current signaling state to a new signaling state, and then reverts to the original signaling state.

Train Signal

This signaling state alternates between two predefined signaling states in a regular defined pattern (series of pulses).

Sequence Signal

This signaling state is defined by a set of train signals.

For information about specific CAS parameters, see the following sections:

- [Section 6.13, “\[CAS\] Parameters for T1 E&M Signals”](#), on page 113
- [Section 6.14, “\[CAS\] Parameters for T1 Loop Start Signals”](#), on page 115
- [Section 6.15, “\[CAS\] Parameters for T1 Ground Start Signals”](#), on page 120

3.5.2 Transition Signal

The transition command defines an ABCD-bit transition from one state to another. It is used to define the CAS transition signals required by a protocol. The transition command uses the following syntax:

```
transition = SignalId, PreVal, PostVal, PreTm, PostTm
```

The transition signal definition includes the following values:

SignalId


Unique identifier (parameter number) of the transition signal. The Channel Protocol (CHP) uses the SignalId to recognize the transition when it is received, and also to generate the transition when needed.

Note: SignalId should not be modified by the user.

PreVal

Defines the ABCD bit states on the line before the transition occurs. The four least significant bits represent the ABCD signaling bits (0 or 1). The four most significant bits represent a mask (A'B'C'D') that specifies if each corresponding signaling bit value counts. If a mask bit is set to 1, the corresponding signaling bit is counted. If a mask bit is set to 0, the corresponding signaling bit is ignored. See Figure 7.

Figure 7. Pre-transition ABCD Bit States

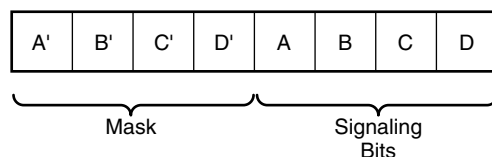

PostVal

Defines the ABCD bit states on the line after the transition occurs. The format of this field is the same as the PreVal field.

PreTm

Defines the minimum amount of time, in milliseconds, for the duration of the pre-transition interval.

PostTm

Defines the minimum amount of time, in milliseconds, for the duration of the post-transition interval.

Transition Example

The following is an example of a transition command that defines a transition signal:

```
transition = 0xC15CA001, 0xF0,0xFF, 100, 300
```

In the example shown, the transition signal is defined as having the following values:

SignalId = 0xC15CA001

Defines the CAS T1 E&M transition signal off-hook.

PreVal = 0xF0 (11110000)

Defines the mask as having a hexadecimal value of F (1111) and the signaling bits as having a hexadecimal value of 0 (0000). Since all of the mask bits are 1, all of the signaling bits are significant. Thus, the A, B, C, and D bits all have a value of 0 before the transition.

PostVal = 0xFF (11111111)

Defines both the mask and the signaling bits as having a hexadecimal value of F (1111). Since all of the mask bits are 1, all of the signaling bits are significant. Thus, the A, B, C, and D bits all have a value of 1 after the transition.

PreTm = 100 ms


Specifies that the PreTm signaling bits must be present for at least 100 ms before they transition to the PostVal signaling values.

PostTm = 300 ms

Specifies that the PostVal signaling bits must be present for at least 300 ms before the signal is reported to the protocol (or if the signal is being sent, then the CAS subcomponent ensures that the PostVal signaling value is generated for at least 300 ms).

Figure 8 is a graphical representation of this signal definition.

Figure 8. Example of Off-hook Transition Signal (0xC15CA001)

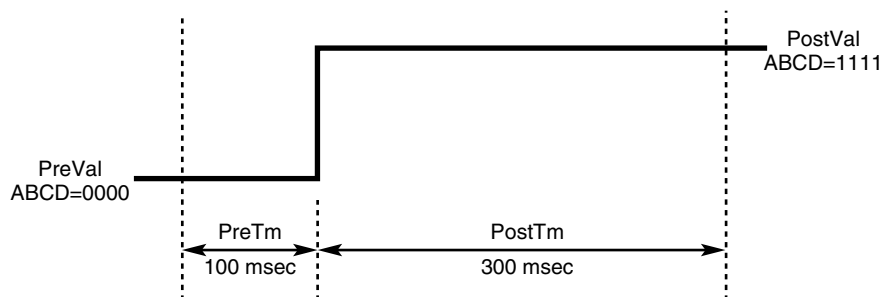

3.5.3 Pulse Signal

The pulse command defines an ABCD-bit transition from one state to another, and then back to the original state. It is used to define the CAS pulse signals required by a protocol. The pulse command uses the following syntax:

```
pulse = SignalId, OffVal, OnVal, PreTm, MinTm, NomTm, MaxTm, PostTm
```

The pulse signal definition includes the following values:

SignalId

Unique identifier (parameter number) of the pulse signal. The Channel Protocol (CHP) uses the SignalId to recognize the pulse when it is received, and also to generate the pulse when needed.

Note: SignalId should not be modified by the user.

OffVal

Defines the ABCD bit states on the line before the transition occurs. The four least significant bits represent the ABCD signaling bits (0 or 1). The four most significant bits represent a mask (A'B'C'D') that specifies if each corresponding signaling bit value counts. See [Figure 7, “Pre-transition ABCD Bit States”](#), on page 35. If a mask bit is set to 1, the corresponding signaling bit is counted. If a mask bit is set to 0, the corresponding signaling bit is ignored.

OnVal

Defines the ABCD bit states on the line during the pulse. The format of this field is the same as the OffVal field.

PreTm

Defines the minimum time, in milliseconds, for the duration of the pre-pulse interval.

MinTm

Defines the minimum time, in milliseconds, for the duration of the pulse interval.

NomTm

Defines the nominal time, in milliseconds, for the duration of the pulse interval.

MaxTm

Defines the maximum time, in milliseconds, for the duration of the pulse interval.

PostTm

Defines the minimum time, in milliseconds, for the duration of the end-of-pulse interval.

Pulse Example

The following is an example of a pulse command that defines a pulse signal:

```
pulse = 0xC15CA011, 0xF0, 0xFF, 100, 220, 250, 280, 100
```

In the example shown, the pulse signal is defined as having the following values:

SignalId = 0xC15CA011

Defines the CAS T1 E&M pulse signal Wink.

OffVal = 0xF0

Defines the mask as having a hexadecimal value of F (1111) and the signaling bits as having a hexadecimal value of 0 (0000). Since all of the mask bits are 1, all of the signaling bits are significant. Thus, the A, B, C, and D bits all have a value of 0 before the transition from the OffVal to the OnVal, and after the transition from the OnVal to the OffVal.

OnVal = 0xFF

Defines both the mask and the signaling bits as having a hexadecimal value of F (1111). Since all of the mask bits are 1, all of the signaling bits are significant. Thus, the A, B, C, and D bits all have a value of 1 after the transition to the OnVal.

PreTm = 100 ms

Specifies that the OffVal signaling bits must be present for at least 100 ms before they transition to the OnVal signaling values.

MinTm = 220 ms

Specifies that the OnVal signaling bits must be present for at least 220 ms before they transition to the OffVal signaling values.

NomTm = 250 ms

Specifies that the OnVal signaling bits are generated for 250 ms before transitioning to the OffVal signaling values.

MaxTm = 280 ms


Specifies that the OnVal signaling bits must be present for no longer than 280 ms before they transition to the OffVal signaling values.

PostTm = 100 ms

Specifies that the OffVal signaling bits must be present for at least 100 ms before the signal is reported to the protocol (or if the signal is being sent, then the CAS component ensures that the OffVal signaling value is generated for at least 100 ms).

Figure 9 is a graphical representation of this signal definition.

Figure 9. Example of Wink Pulse Signal (0xC15CA011)

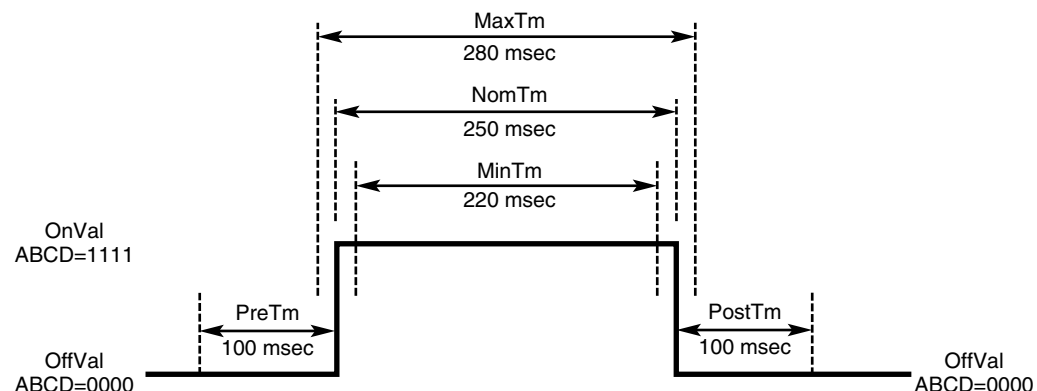

3.5.4 Train Signal

The train command defines a set of transitions from one signaling state to another in a predefined pattern (set of pulses). It is used to define CAS signals required by a protocol. The train command uses the following syntax:

```
train = SignalId, OffVal, OnVal, PulseTmMin, PulseTmMax, PulseTmNom, preTm, interTmMin,
interTmMax, interTmNom, postTm, digitCount, pulseCount, label, pulseCount, label, ...
```

The train signal definition includes the following values:

SignalId

Unique identifier (parameter number) of the train signal. The Channel Protocol (CHP) uses the SignalId to recognize the train when it is received, and also to generate the train when needed.

Note: SignalId should not be modified by the user.

OffVal

Defines the ABCD bit states on the line before the transition occurs. The four least significant bits represent the ABCD signaling bits (0 or 1). The four most significant bits represent a mask (A'B'C'D') that specifies if each corresponding bit value counts. See [Figure 7, “Pre-transition ABCD Bit States”](#), on page 35. If a mask bit is set to 1, the corresponding signaling bit is counted. If a mask bit is set to 0, the corresponding signaling bit is ignored.

OnVal

Defines the ABCD bit states on the line during one pulse of the train. The format of this field is the same as the OffVal field.

PulseTmMin

Defines the minimum time, in milliseconds, for the duration of the pulse interval.

PulseTmMax

Defines the maximum time, in milliseconds, for the duration of the pulse interval.

PulseTmNom

Defines the nominal time, in milliseconds, for the duration of the pulse interval.

preTm

Defines the minimum time, in milliseconds, for the duration of the pre-train interval.

interTmMin

Defines the minimum time, in milliseconds, for the duration of the inter-pulse interval.

interTmMax

Defines the maximum time, in milliseconds, for the duration of the inter-pulse interval.

interTmNom

Defines the nominal time, in milliseconds, for the duration of the inter-pulse interval.

postTm

Defines the maximum time, in milliseconds, for the duration of the post-train interval.

digitCount

Defines the number of digit definitions in the train. The pulse count for each digit (ASCII character) is defined by the label pairs following digitCount.

pulseCount

Defines the number of train pulses that define the digit (ASCII character) identified by the label parameter.

label

Defines the digit (ASCII character) associated with the corresponding pulseCount value.

Train Example

The following is an example of a train command that defines a train signal:

```
train = 0xC15CA032, 0xCC, 0xC4, 31, 33, 32, 600, 62, 66, 64, 20, 12, 10, 0, 1, 1, 2, 2, 3, 3, 4,
4, 5, 5, 6, 6, 7, 7, 8, 8, 9, 9, 11, #, 12, *
```

In the example shown, the train signal is defined as having the following values:

SignalId = 0xC15CA032

Defines the CAS T1 loop start train signal parameter.

OffVal = 0xCC

Defines both the mask and the signaling bits as having a hexadecimal value of C (1100). Since only mask bits A and B have a value of 1, only signaling bits A and B are significant. Thus, the A and B bits both have a value of 1 before the transition from the OffVal to the OnVal.

OnVal = 0xC4

Defines the mask as having a hexadecimal value of C (1100) and the signaling bits as having a hexadecimal value of 4 (0100). Since mask bits A and B have a value of 1, signaling bits A and B are significant. Thus, the A bit has a value of 0 and the B bit has a value of 1 after the transition to the OnVal.

PulseTmMin = 31

Specifies that the OnVal signaling bits must be present for at least 31 ms before they transition to the OffVal signaling values.

PulseTmMax = 33

Specifies that the OnVal signaling bits must be present for no longer than 33 ms before they transition to the OffVal signaling values.

PulseTmNom = 32

Specifies that the OnVal signaling bits must be present for 32 ms before they transition to the OffVal signaling values.

preTm = 600

Specifies that the OffVal signaling bits must be present for 600 ms before the train signal begins.

interTmMin = 62

Specifies that the OffVal signaling bits must be present for at least 62 ms before they transition to the OnVal signaling values.

interTmMax = 66

Specifies that the OffVal signaling bits must be present for no longer than 66 ms before they transition to the OnVal signaling values.

interTmNom = 64

Specifies that the OffVal signaling bits must be present for 64 ms before they transition to the OnVal signaling values.

postTm = 20

Specifies that the OffVal signaling bits must be present for 20 ms before the signal is reported to the protocol (or if the signal is being sent, then the CAS component ensures that the OffVal value is generated for at least 20 ms).

digitCount = 12


Specifies that 12 digits/characters are defined by this train signal.

pulseCount, label pairs = 10,0 1,1 2,2 3,3 4,4 5,5 6,6 7,7 8,8 9,9 11,# 12,*

The first pair indicates that 10 pulses correspond to the digit “0”, the next pair indicates that 1 pulse corresponds to the digit “1”, and the last pair indicates that 12 pulses correspond to the ASCII character “*”.

Figure 10 is a graphical representation of this signal definition.

Figure 10. Example of T1 Loop Start Train Signal (0xC15CA032)

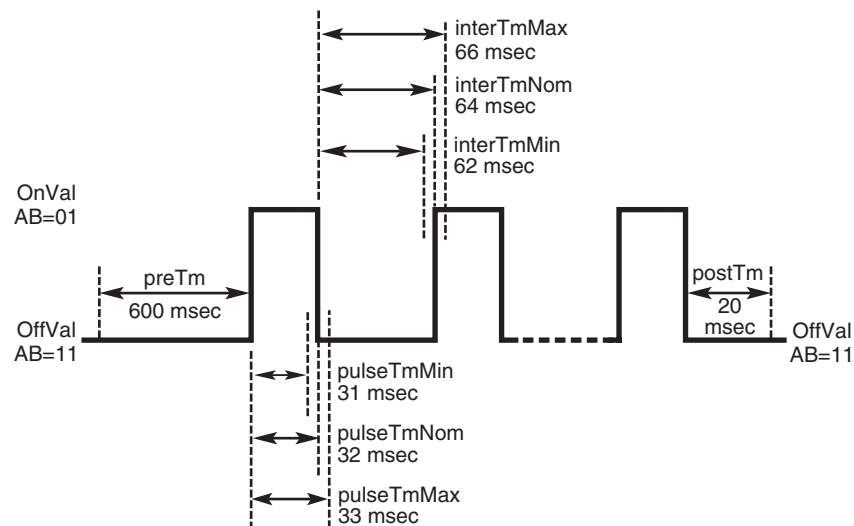

3.5.5 Sequence Signal

The sequence command defines a set of train signals. It is used to define CAS signals required by a protocol. The sequence command uses the following syntax:

```
sequence = SignalId, TrainSigId, preTm, interTmMin, interTmMax, interTmNom, postTm
```

The sequence signal definition includes the following values:

SignalId

Unique identifier (parameter number) of the sequence signal. The Channel Protocol (CHP) uses the SignalId to recognize the sequence when it is received, and also to generate the sequence when needed.

Note: SignalId should not be modified by the user.

TrainSigId

Defines the train signal that the sequence signal uses.

preTm

Defines the minimum time, in milliseconds, for the duration of the pre-sequence interval.

interTmMin

Defines the minimum time, in milliseconds, for the duration of the inter-train interval.

interTmMax

Defines the maximum time, in milliseconds, for the duration of the inter-train interval.

interTmNom

Defines the nominal time, in milliseconds, for the duration of the inter-train interval.

postTm

Defines the minimal time, in milliseconds, for the duration of the post-sequence interval.

Sequence Example

The following is an example of a sequence command that defines a sequence signal:

```
sequence = 0xC15CA033, 0xC15CA032, 720, 640, 680, 660, 1600
```

In the example shown, the sequence signal is defined as having the following values:

SignalId = 0xC15CA033

Specifies the CAS T1 loop start sequence signal parameter.

TrainSigId = 0xC15CA032

Specifies the train signal definition that the sequence signal uses.

preTm = 720

Specifies that the OffVal signaling bits (as defined in the train definition) must be present for 720 ms before the sequence signal begins (that is, before the first train signal begins).

interTmMin = 640

Specifies that the OffVal signaling bits (as defined in the train definition) must be present for at least 640 ms between train signals.

interTmMax = 680

Specifies that the OffVal signaling bits (as defined in the train definition) must be present for no longer than 680 ms between train signals.

interTmNom = 660


Specifies that the OffVal signaling bits (as defined in the train definition) must be present for 660 ms between train signals.

postTm = 1600

Specifies that the OffVal signaling bits (as defined in the train definition) must be present for 1600 ms before the signal is reported to the protocol (or if the signal is being sent, then the CAS component ensures that the OffVal value is generated for at least 1600 ms).

Figure 11 is a graphical representation of this signal definition.

Figure 11. Example of T1 Loop Start Sequence Signal (0xC15CA033)

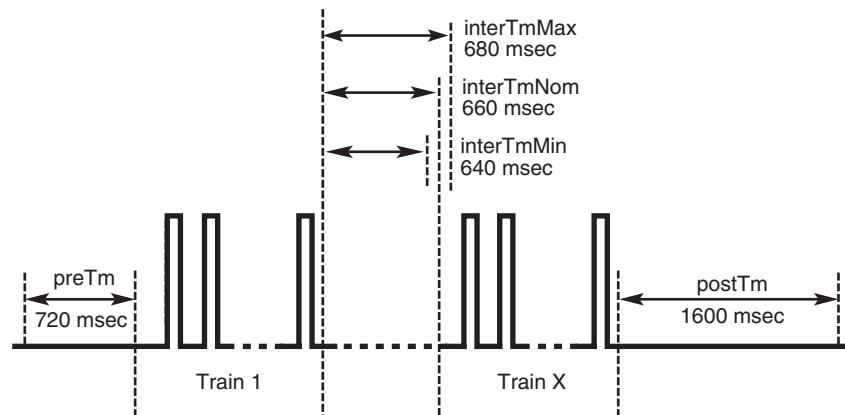

3.6 [CHP] Section

The Channel Protocol (CHP) component implements the telephony communication protocol that is used on each network interface. There are different versions of this component for handling different signaling types as well as different protocol types on different B channels. There is one CHP instance created for each B channel in the system.

The [CHP] section of the CONFIG file is a subset of the [TSC] section. Protocol specific parameters, primarily in the form of variants, are defined in the [CHP] section. The selection of which of these protocol variants to use on which line (span) is determined in the [TSC] section. For more information on protocol variants selection, see [Section 3.7, “\[TSC\] Section”](#), on page 45.

A number of protocol variants are defined in the [CHP] section of the CONFIG file. Variants are defined by the Variant Define *n* command, where *n* is the variant identifier. The Variant Define *n* command defines variant “*n*” as all of the parameter definitions in the [CHP] section preceding the command.

Note: If a parameter is defined multiple times prior to the Variant Define *n* command, then only the last definition of the parameter is used for that variant.

Example

```
! T1 Protocol variant definitions
Variant VariantFormat      1      !T1 CAS format
Variant ProtocolType       1      !E&M=1,LS-FXS=2,GS-FXS=3
Variant Wink                y
Variant Dial                 y
```

```

Variant DialFormat      1      !DTMF=1, MF, DP
Variant ANI             0      !No=0, Pre, Post
Variant ANIFormat       1      !DTMF=1, MF, DP
Variant ANICount        0
Variant DNIS            y
Variant DNISFormat      1      !DTMF=1, MF, DP
Variant DNISCount       0
Variant CallProgress    y
.
.
.

! Define Protocol Variant 2 as T1 E&M Wink Start, DTMF Dial &
! DNIS + callProgress
Variant Define 2

! Note: Previous variant parms are kept, and the following
! commands replace the specified parameters

! Define Protocol Variant 5 as T1 Loop Start FXS, DTMF Dial
! & DNIS, callProgress, and DialTone detection.
Variant ProtocolType    2      !E&M=1,LS-FXS=2,GS-FXS=3
Variant Wink            n
Variant Define 5

! Define Protocol Variant 4 as T1 E&M Wink Start, no tone
! and no callProgress
Variant ProtocolType    1      !E&M=1,LS-FXS=2,GS-FXS=3
Variant Wink            y
Variant Dial            n
Variant DNIS            n
Variant CallProgress    n
Variant Define 4

! Define Protocol Variant 6 as Ground Start FXS
Variant ProtocolType    3      !E&M=1,LS-FXS=2,GS-FXS=3
Variant Wink            n
Variant Dial            y
Variant DNIS            y
Variant CallProgress    y
Variant Define 6

```

From the [CHP] example, selecting protocol variant 2 would include all the parameter definitions from the beginning of the [CHP] section to the Variant Define 2 line. This would define the protocol as T1 E&M Wink start, DTMF dialing, DNIS digits, with call progress (ProtocolType = 1, Wink = y, Dial = y, DialFormat = 1, DNIS = y, CallProgress = y).

If, however, you were to select protocol variant 5, this would include all of the parameter definitions from the beginning of the [CHP] section to the Variant Define 5 line. In this case, the protocol type would change to LS-FSX (Loop start) and Wink Start would be disabled, but DTMF dialing, DNIS digits, and call progress would still be used (ProtocolType = 2, Wink = n).

If protocol variant 4 were selected, all of the parameter definitions from the beginning of the [CHP] section to the Variant Define 4 line would be included. Now, the protocol type would change back to E&M Wink start with no DTMF dialing, no DNIS digits, and no call progress (ProtocolType = 1, Wink = y, Dial = n, DNIS = n, CallProgress = n).

You may also create your own variant if none of the existing defined protocol variants match your need. For example, to create a new protocol variant in which you want to use E&M Immediate start (instead of Wink start) with no ANI/DNIS digits provided, you may add another Variant Define *n*

after the Variant Define 2 statement. In this example, we can use $n = 1$ because this number has not yet been defined in the CONFIG file. That part of the [CHP] section would then become:

```
! Define Protocol Variant 2 as T1 E&M Wink Start, DTMF Dial & DNIS + callProgress
Variant Define 2
! Define Protocol Variant 1 as T1 E&M Immediate Start, DTMF Dial + callProgress
Variant Wink n
Variant DNIS n
Variant Define 1
```

By disabling DNIS in protocol variant 1, which follows protocol variant 2, we have also caused DNIS to be disabled in protocol variant 5. DNIS was originally enabled in protocol variant 5 because protocol variant 5 followed protocol variant 2 which defined it as enabled. We will now need to re-enable DNIS in protocol variant 5 as shown in the following example:

```
! Define Protocol Variant 5 as T1 Loop Start FXS, DTMF Dial
! & DNIS, callProgress, and DialTone detection.
! Add DNIS back to this protocol variant
Variant DNIS y
Variant ProtocolType 2 ! E&M=1, LS-FXS=2, GS-FXS=3
Variant Wink n
Variant Define 5
```

Although protocol variants are defined in the [CHP] section, protocol variants are assigned in the [TSC] section of the CONFIG file. Selecting a particular Variant Define n is accomplished by changing the values of the **Inbound** and **Outbound** parameters for a particular line. The **Inbound** and **Outbound** parameters are the sixth and seventh parameters respectively in the defineBSet command in the [TSC] section of the CONFIG file.

For information about the defineBSet command and setting TSC parameters, see [Section 3.7, “\[TSC\] Section”](#), on page 45.

For information about each CHP parameter, see the following sections:

- [Section 6.19, “\[CHP\] Parameters”](#), on page 132
- [Section 6.20, “\[CHP\] T1 Protocol Variant Definitions”](#), on page 134
- [Section 6.21, “\[CHP\] ISDN Protocol Variant Definitions”](#), on page 150

3.7 [TSC] Section

The [TSC] section of the CONFIG file defines a set of B channels and associated characteristics using the defineBSet command. The syntax of the defineBSet command is:

```
defineBSet = SetId, LineId, StartChan, NumChans, BaseProtocol, Inbound, OutBound, DChanDesc,
Admin, Width, BChanId, SlotId, Direction, Count, [BChanId, SlotId, Direction, Count,] 0
```

To change a [TSC] parameter, you change the value of the applicable defineBSet parameter in the CONFIG file. For example, to change the protocol variant from 2 to 4 for both inbound and outbound call processing on all 30 channels of line 2, you would change the value of the **Inbound** and **Outbound** parameters for line 2 (**SetId**=20) from 2 to 4. For information on defining protocol variants, see [Section 3.6, “\[CHP\] Section”](#), on page 43.

Following is an excerpt from the [TSC] section of a CONFIG file that illustrates that part of the file before and after editing.

Before editing:

```
defineBSet=10,1,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=20,2,1,30, 0,2,2,1,20,1, 1,1,3,15, 16,17,3,15,0
```

After editing:

```
defineBSet=10,1,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=20,2,1,30, 0,4,4,1,20,1, 1,1,3,15, 16,17,3,15,0
```

For information about each TSC parameter, see [Section 6.24, “\[TSC\] defineBSet Parameters”](#), on page 159.

3.8 Configuring Trunks for Clear Channel Signaling

For DMN160TEC and DMT160TEC boards, trunks can be configured for clear channel signaling on a trunk by trunk basis. This allows the mixing of ISDN trunks and clear channel trunks on the same board. In a clear channel configuration, time slot 16 can be used as a bearer channel, in addition to the other 30 bearer channels.

3.8.1 E1 Configurations

For E1 configurations, downloading the following configuration file sets will configure all 16 trunks on the DMN160TEC or DMT160TEC board for clear channel signaling.

For the DMN160TEC board:

- dti16_isdn_e1cc.config
- dti16_isdn_e1cc.fcd
- dti16_isdn_e1cc.pcd

For the DMT160TEC board:

- 16xt_isdn_e1cc.config
- 16xt_isdn_e1cc.fcd
- 16xt_isdn_e1cc.pcd

When the dti16_isdn_e1cc or 16xt_isdn_e1cc configuration file set is used, the defineBSet maps B channels 1 through 15 to time slots 1 through 15, B channels 16 through 30 to time slots 17 through 31, and B channel 31 to time slot 16.

One or more trunks on a board can be configured as common channel signaling ISDN trunks by editing the CONFIG file. For example, to change trunks 3 and 4 on a DMN160TEC board to ISDN trunks, the **SetParm=0x1602** parameter in the dti16_isdn_e1cc.config file would be edited as shown in bold.

```
[lineAdmin.3]! Instance
SetParm=0x1601,3! LineType (dsx1_D4=0, dsx1_ESF=1, dsx1_E1_CRC=3)
SetParm=0x1602,5! SignalingType (CAS=4, CCS=5, Clear=6)
                ! For NFAS Trunks only-The Signaling Type
                ! parameter under the LineAdmin section must
                ! be set to indicate Clear Channel mode.
SetParm=0x1603,9! Coding (B8ZS=7, AMI=8, HDB3=9)
.
.
.
.
[lineAdmin.4]! Instance
SetParm=0x1601,3! LineType (dsx1_D4=0, dsx1_ESF=1, dsx1_E1_CRC=3)
SetParm=0x1602,5! SignalingType (CAS=4, CCS=5, Clear=6)
                ! For NFAS Trunks only-The Signaling Type
                ! parameter under the LineAdmin section must
                ! be set to indicate Clear Channel mode.
SetParm=0x1603,9! Coding (B8ZS=7, AMI=8, HDB3=9)
.
.
.
.
```

Also, different ISDN protocols can be assigned on a trunk-by-trunk basis by changing a parameter in the CCS section of the CONFIG file. For example, to change trunk 4 to Qsig on a DMN160TEC board, the **Setparm=0x7** parameter in the dti16_isdn_e1cc.config file would be edited as shown in bold:

```
[CCS.4]
.
.
.
.
Setparm=0x13,0! Symmetrical C.E. protocol. 0=disable 1=enable
Setparm=0x17,0                ! ISDN Protocol Mode. 0 = USER_MODE; 1 =
NETWORK_MODE
Setparm=0x7,10    ! The switch type :
                    ! 4ess=1 5ess=2 dms=3,ntt=4 dass2=6 net5=7
                    ! qsigel=10 qsigtl=11 ni2=12 dpnss=13
```

And the CHP section of the CONFIG file would be edited as follows:

```
[CHP]
.
.
.
.
! ISDN Protocol variant definitions

Variant VariantFormat          2                ! ISDN format (isdndefs.h)

Variant ProtocolType           7                ! 4ESS,NI2=1, 5ESS=2, DMS=3,
NTT=4, NET5,QSIG=7
```

After editing the CONFIG file, you will need to generate a new FCD file. For information about modifying FCD file parameters, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

3.8.2 T1 Configurations

For T1 configurations, the existing configuration file sets are used for clear channel signaling. By default, B channels 1 through 24 are mapped to time slots 1 through 24. However, you will need to modify the lineAdmin SignalingType parameter to change a trunk to clear channel signaling.

As in E1 trunks, ISDN or clear channel T1 trunks can be assigned on a trunk-by-trunk basis by changing a parameter in the lineAdmin section of the CONFIG file. For T1, however, only one ISDN protocol type will be supported when mixing ISDN and clear channel trunks on a board.

For example, to change trunk 4 to clear channel signaling on a DMN160TEC board using the 4ess ISDN protocol, the **Setparm=0x1602** parameter in the dti16_isdn_4ess.config file would be edited as shown in bold:

```
[lineAdmin.4]           ! Instance 4
SetParm=0x1601,1        ! LineType (dsx1_D4=0, dsx1_ESF=1)
SetParm=0x1602,6       ! SignalingType (CAS=4, CCS=5, Clear=6)
SetParm=0x1603,7        ! Coding (B8ZS=7, AMI=8)
.
.
.
.
```

3.8.3 General Considerations

When configuring one or more trunks on a DMN160TEC or DMT160TEC board to use clear channel signaling, the following must be considered:

- A mix of CAS and clear channel signaling is not supported on a single board.
- After changing a trunk's configuration, the board must be re-initialized for the configuration to take effect.
- For T1 configurations, only one ISDN protocol can be mixed with clear channel signaling on the same board.

The following information provides detailed procedures for each major step in the configuration process (some steps may not apply to your configuration):

- Assumptions and Prerequisites 49
- Order of Procedures..... 50
- Starting the Configuration Manager (DCM) 50
- Selecting a Configuration File Set..... 52
- Setting the TDM Bus Clock Source 54
- Setting the Bus Companding Method for DM3 Configurations 55
- Configuring the Network Interface Connector 56
- Modifying Other DCM Property Sheet Parameters..... 58
- Setting the FSK Transmit and Receive Signal Levels 59
- Modifying the FCD File Parameters 60
- Initializing the System..... 61
- Downloading Global Call CDP File Parameters 62
- Reconfiguring the System 62

4.1 Assumptions and Prerequisites

The following assumptions and prerequisites exist regarding the configuration procedures:

- All required software, including prerequisites, have been installed according to the procedures in the Installation Guide supplied with your Intel® Dialogic® System Release.
- The Intel Dialogic System Release was installed in the default directory *C:\Program Files\Dialogic*. Command instructions, directories paths and environment variable are shown relative to the default installation directory.
- You have administrative privileges on the local computer and on any remote computer you connect to in order to use the configuration manager (DCM). Contact your network administrator to set up administrative privileges as required.
- If applicable, the Global Call protocols have been installed. The Global Call protocols are provided in a separately orderable package. For information about obtaining the Global Call Protocol Package, see your Sales representative. For information about the procedure for downloading the Global Call protocols and information about the country dependent parameters associated with a protocol, see the *Global Call Country Dependent Parameters (CDP) Configuration Guide* which comes with the Global Call Protocol Package.
- If applicable, TDM bus resources have been reserved for third party boards as described in the configuration manager (DCM) Online Help.

4.2 Order of Procedures

Procedures that are required when initially configuring any system are noted as such. The additional procedures may be required depending on your system. Except for the required procedures, configuration procedures should be performed in the order presented. FCD file parameter modifications can be made any time prior to initializing the system.

1. Starting the configuration manager (DCM) (**required**)
2. Selecting a configuration file set
3. Setting the TDM bus clock source
4. Setting the bus companding method for DM3 configurations
5. Configuring additional parameters for Intel® NetStructure™ DM/IP Series boards
6. Modifying other DCM property sheet parameters
7. Selecting Different Configuration File Sets
8. Modifying FCD file parameters
9. Initializing the system (**required**)
10. Downloading Global Call CDP file parameters
11. Reconfiguring the system

4.3 Starting the Configuration Manager (DCM)


Note: Online Help is available for all parameters accessible through the configuration manager (DCM); to access the help, choose **Help > Contents** in the DCM main window.

To start the DCM, perform the following steps:

1. From the Windows* **Start** menu, choose **Programs > System Release 6.0 PCI > Configuration Manager-DCM** to access the Configuration Manager (DCM). The Computer Name dialog box will appear (Figure 12).

Note: The Computer Name dialog box displays automatically the first time you run the DCM with the local computer name as the default. If the Computer Name dialog box is not already displayed, you can get it by choosing **File > Connect** or by clicking the Connect icon on the DCM main window.

Figure 12. Computer Name Dialog Box

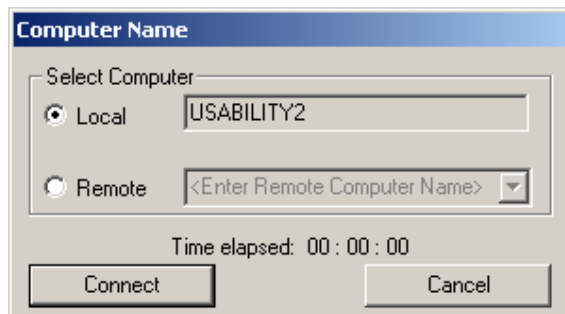

Note: The Intel Dialogic System uses DCOM objects to run Intel Dialogic software on remote computers. Remote DCM Intel Dialogic software internally sets up the DCOM security level programmatically. Do *not* use the Windows* DCOM configuration utility *dcomcnfg.exe* to change the security settings. If you do, the Intel Dialogic System may not work properly. For example, on a Windows machine, if you change the setting to Anonymous, the Intel Dialogic System does not work properly.

Note: To use remote DCM across firewalls, enable the port used by the DCOM Server, *DCMObj.exe*, in the firewall configuration. *DCMObj.exe* is located in the system32 directory. To determine the port used by *DCMObj.exe*, first use the Windows Task Manager to find out the PID of *DCMObj.exe*. Once you know the PID, you can use a port usage utility to find out the port used by *DCMObj.exe*. Windows XP users can run `netstat -o` to find the port.

2. Connect to either the local computer or a remote computer as follows:
 - To connect to the local computer, click **Connect**.
 - To connect to a remote computer, select the **Remote** radio button, enter the remote computer name, and click **Connect**. For TCP/IP networks, you can enter the IP address instead of the remote computer name.

After you connect to a computer, a window will appear that indicates that boards are being detected followed by the DCM main window. The DCM main window contains a tree structure of the boards installed in your system. Refer to [Figure 1, “DCM Main Window”](#), on page 14). In addition to the DCM main window, a system tray icon is also created. For details about the DCM system tray icon, refer to the DCM Online Help

Continue with any additional configuration procedures that are applicable to your system.

- If you need to use PCD and FCD files other than the default files, see [Section 4.4, “Selecting a Configuration File Set”](#), on page 52.
- If you need to configure the TDM bus, see [Section 4.5, “Setting the TDM Bus Clock Source”](#), on page 54.
- If you are using an E1 product, see [Section 4.6, “Setting the Bus Companding Method for DM3 Configurations”](#), on page 55.
- If you are using Intel NetStructure DM/IP Series boards in your system, see [Section 4.7, “Configuring the Network Interface Connector”](#), on page 56.

- If you need to change additional DCM parameters, see [Section 4.8, “Modifying Other DCM Property Sheet Parameters”](#), on page 58.
- If you need to change parameter settings in the FCD file, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

When you are satisfied with all configuration information, proceed with [Section 4.11, “Initializing the System”](#), on page 61.

4.4 Selecting a Configuration File Set

The first time you configure a board, you can select different configuration files than the default files assigned by the system, in one of two ways: by modifying parameters on the Misc property sheet, or by using the Assign Firmware File dialog box. For details about configuration file sets, see [Section 2.3, “Configuration File Sets”](#), on page 17.

To select different configuration files using the Misc property sheet, perform the following:

1. Double-click the board model name on the DCM main window to display the board’s property sheets. Refer to [Figure 2, “Misc Property Sheets”](#), on page 15.
Note: You must use this procedure if you want to assign different PCD and FCD files to the board (that is, assign PCD and FCD files from two different configuration file sets).
2. Click the Misc property sheet tab to view all of the Misc property sheet parameters associated with the board.
3. Select the **FCDFileName** parameter by clicking on it; the selected parameter and its current value are displayed on the bottom of the property sheet.
4. In the Value window of the property sheet, type the name of the FCD file to be assigned to this board.
5. Select the **PCDFileName** parameter by clicking on it; the selected parameter and its current value are displayed on the bottom of the property sheet.
6. In the Value window of the property sheet, type the name of the PCD file to be assigned to this board.
7. Click the OK button to save all your changes and return to the DCM main window.


To select different configuration files using the Assign Firmware File dialog box, perform the following:

1. From the DCM System pull-down menu, select the Auto Detect Devices option. The Assign Firmware File dialog box will appear. Refer to [Figure 13](#).
2. In the Available Firmware window, select the PCD file that corresponds to the configuration file set you want to assign to this board.

- Click the OK button. The selected PCD file name will be assigned to the **PCDFileName** parameter located on the board's Misc property sheet. The corresponding FCD file will be assigned to the **FCDFileName** parameter also located on the board's Misc property sheet.

Note: To assign different PCD and FCD files to the board (that is, assign PCD and FCD files from two different configuration file sets), you must use the procedure described in "Step 2".

Figure 13. Assign Firmware File Dialog Box

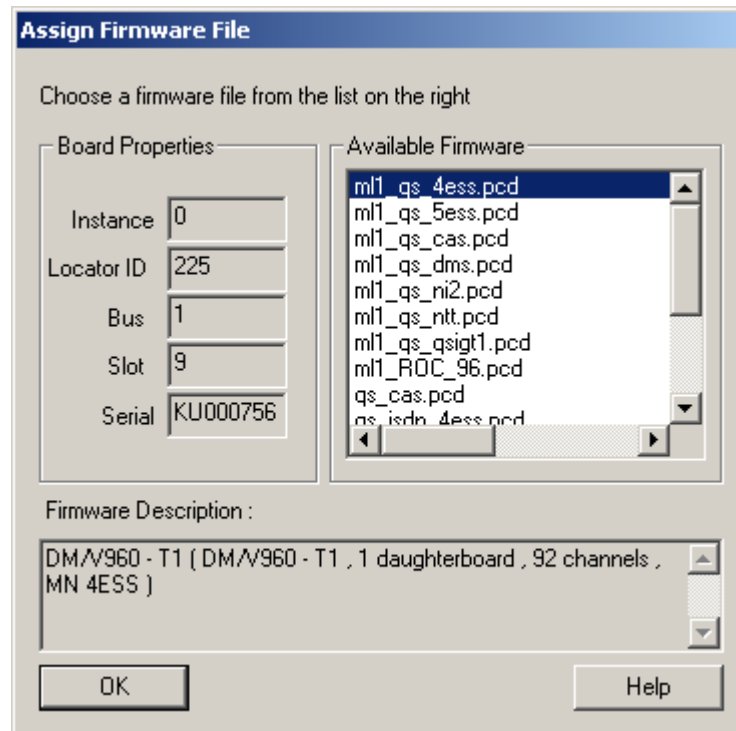

Continue with any additional configuration procedures that are applicable to your system.

- If you need to configure the TDM bus, see [Section 4.5, “Setting the TDM Bus Clock Source”](#), on page 54.
- If you are using an E1 product, see [Section 4.6, “Setting the Bus Companding Method for DM3 Configurations”](#), on page 55.
- If you are using Intel NetStructure DM/IP Series boards in your system, see [Section 4.7, “Configuring the Network Interface Connector”](#), on page 56.
- If you need to change additional DCM parameters, see [Section 4.8, “Modifying Other DCM Property Sheet Parameters”](#), on page 58.
- If you need to change parameter settings in the FCD file, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

When you are satisfied with all configuration information, proceed with [Section 4.11, “Initializing the System”](#), on page 61.

4.5 Setting the TDM Bus Clock Source

The *default clock source* is the internal oscillator of the Primary Master board. You should derive clocking from a digital network trunk if available, not from a board's internal oscillator. The internal oscillator should be used as the clock source only for internal testing purposes.

Note: When configuring a board that has front-end capability as resource only, the system will not detect this and might select this board as clock master. In this event, the user must manually configure another board in the system as the clock master.

1. To access the clocking settings in the DCM, double-click **Bus-0** under TDM Bus in the DCM tree structure of configured devices. Refer to [Figure 1, "DCM Main Window"](#), on page 14. This displays the TDM Bus Configuration property sheet for Bus-0. Refer to [Figure 3, "TDM Bus Configuration Property Sheet"](#), on page 16.

Note: To configure a third-party board installed in your system, refer to the DCM Online Help.

2. Designate a board as the primary master by performing the following:
 - 2a. Select the **Primary Master FRU (User Defined)** parameter.
 - 2b. In the Value list box select the name of the board that will provide the clocking to the bus.
 - 2c. Click **Apply**.
3. If the Primary Master board is deriving system clocking from a digital network trunk connected to a Network Reference (NETREF) board, perform the following. Otherwise, if you are using the Primary Master board's internal oscillator as the clocking source, skip to Step 4.
 - 3a. Select the **NETREF One FRU (User Defined)** parameter.
 - 3b. In the Value box, type the name of the board that contains the network interface which will provide a network reference clock to the system. The board name you enter should be the same name as displayed in the DCM main window.
 - 3c. Click **Apply**.
 - 3d. Specify the source of the network reference clock (specifically, the trunk on the board containing the digital network interface providing the clock) via the **Derive NETREF One From (User Defined)** parameter.
 - 3e. Click **Apply**.
4. Configure the Primary Master board to use the correct clock reference by setting the **Derive Primary Clock From (User Defined)** parameter to either NETREF_1 or Internal Oscillator.
5. Click **OK**.
6. Designate a board as the secondary clock master by perform the following:
 - 6a. Select the **Secondary Master FRU (User Defined)** parameter.
 - 6b. In the Value list box, select the name of the board that will provide the clocking to the bus if the primary master fails.

- 6c. Click **Apply**.
- 6d. Configure the Primary Master board to use the correct clock reference by setting the **Derive Primary Clock From (User Defined)** parameter to either NETREF_1 or Internal Oscillator.
- 6e. Click **OK**.

Continue with any additional configuration procedures that are applicable to your system.

- If you are using an E1 product, see [Section 4.6, “Setting the Bus Companding Method for DM3 Configurations”](#), on page 55.
- If you are using Intel NetStructure DM/IP Series boards in your system, see [Section 4.7, “Configuring the Network Interface Connector”](#), on page 56.
- If you need to change additional DCM parameters, see [Section 4.8, “Modifying Other DCM Property Sheet Parameters”](#), on page 58.
- If you need to change parameter settings in the FCD file, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

When you are satisfied with all configuration information, proceed with [Section 4.11, “Initializing the System”](#), on page 61.

4.6 Setting the Bus Companding Method for DM3 Configurations

The bus companding method for DM3 architecture boards is defined using the **Media Type (User Defined)** parameter. This parameter is associated with the TDM Bus Configuration for Bus 0 in DCM. Initially, the **Media Type (User Defined)** value is set to **Default**. This causes the system to default to the value determined by the **Media Type (Resolved)** parameter. In this case, the bus companding method as indicated by **Media Type (Resolved)** parameter is:

- mu-law: If only T1 boards are installed in the system.
- mu-law: If resource only boards (not connected to a T1 or E1 trunk) are combined with boards that can be configured for mu-law.
- A-law: If only E1 boards are installed in the system.
- A-law: If resource only boards (not connected to a T1 or E1 trunk) are combined with boards that can be configured for A-law.

For boards that have a physical E1 interface or are configured for E1 protocols (e. g., DMVA-600-4E1-cPCI), the runtime firmware forces the board's Media Type to be A-law companding. Similarly, for boards that have a physical T1 interface or are configured for T1 protocols (e. g., DMVA-480-T1-cPCI), the runtime firmware forces the board's Media Type to be mu-law companding. Therefore, E1 boards can only be resolved as A-law companding and T1 boards can only be resolved as mu-law companding by the TDM configuration.

Note: For boards that have a physical network interface, but are configured as resource only (i. e. no protocol loaded), the firmware will still determine the network interfaces and force the resolution of the Media Type to be either A-law for E1 physical interfaces or mu-law for T1 physical interfaces. Therefore, the above conditions still apply.

If boards that can only be resolved as mu-law and boards that can only be resolved as A-law are installed in the same system, the system will not complete the initialization process and will log an error.

To set the bus companding method perform the following:

1. In the DCM main window ([Figure 1, “DCM Main Window”](#), on page 14), double-click **Bus-0** under TDM Bus in the DCM tree structure of configured devices. This displays the TDM Bus Configuration property sheet for Bus-0.
2. Select the **Media Type (User Defined)** parameter by clicking on it.
3. Select **A-Law** or **mu-Law**, as appropriate, from the pull-down menu.
4. Click **OK** to set the parameter and return to the DCM main window.

Continue with any additional configuration procedures that are applicable to your system.

- If you are using Intel NetStructure DM/IP Series boards in your system, see [Section 4.7, “Configuring the Network Interface Connector”](#), on page 56.
- If you need to change additional DCM parameters, see [Section 4.8, “Modifying Other DCM Property Sheet Parameters”](#), on page 58.
- If you need to change parameter settings in the FCD file, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

When you are satisfied with all configuration information, proceed with [Section 4.11, “Initializing the System”](#), on page 61.

4.7 Configuring the Network Interface Connector

To configure the Network Interface Connector (NIC) for an Intel NetStructure DM/IP Series board, perform the following procedure:

1. Double-click on the Intel NetStructure DM/IP Series board in the DCM main window.
2. Click the **Network** property sheet.
Note: The IPAddress, SubnetMask, and GatewayIPAddress parameters (on the Network property sheet) must be filled in for successful functioning of the Intel NetStructure DM/IP Series board.
3. Select the **IPAddress** parameter by clicking on it; the parameter and its current value are displayed on the bottom of the property sheet.
4. In the Value box of the property sheet, type the IP address to be assigned to the NIC on the T1 NIC or E1 NIC board. Use the format xxx.xxx.xxx.xxx (for example, 146.152.187.42). Incoming calls to this board should be directed to the IP address specified by this parameter.
Note: Each T1 NIC or E1 NIC board in the system must have a unique IPAddress parameter setting.

5. Click **Apply** to save the change.
6. Select the **SubnetMask** parameter; the parameter and its current value are displayed on the bottom of the property sheet.
7. In the Value box of the property sheet, type the IP address where Ethernet* packets are to be sent (and according to site IP procedures). Use the xxx.xxx.xxx.xxx format (for example, 255.255.255.10). This parameter determines whether Ethernet packets are sent directly to a particular address or sent to a default router.
8. Click **Apply** to save the change.
9. Select the **TargetName** parameter; the parameter and its current value are displayed on the bottom of the property sheet.
10. In the Value box of the property sheet, type the name of the NIC on the T1 NIC or E1 NIC board. You can choose any name.
11. Click **Apply** to save the change.
12. Select the **HostName** parameter; the parameter and its current value are displayed on the bottom of the property sheet.
13. In the Value box of the property sheet, type the name of the host machine.
14. Click **Apply** to save the change.
15. Select the **UserName** parameter; the parameter and its current value are displayed on the bottom of the property sheet.
16. In the Value box of the property sheet, type any name with valid log-in access to the host machine that was named in the **HostName** parameter.
17. Click **Apply** to save the change.
18. Select the **GatewayIPAddress** parameter; the parameter and its current value are displayed on the bottom of the property sheet.
19. In the Value box of the property sheet, type the IP address of the default router for the Ethernet interface using the xxx.xxx.xxx.xxx format (for example, 255.255.255.0).
20. Click **Apply** to save the change.
21. Click **OK** to return to the DCM main window.

Continue with any additional configuration procedures that are applicable to your system.

- If you need to change additional DCM parameters, see [Section 4.8, “Modifying Other DCM Property Sheet Parameters”](#), on page 58.

- If you need to change parameter settings in the FCD file, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

When you are satisfied with all configuration information, proceed with [Section 4.11, “Initializing the System”](#), on page 61.

4.8 Modifying Other DCM Property Sheet Parameters

Within the DCM, each board has a set of property sheets that display the board’s configuration parameters, grouped together on tabs according to the type of board functionality that they affect. To change a board’s configuration parameters, follow this procedure:

1. Double-clicking the board model name in the DCM main window to display the board’s property sheets. Refer to [Figure 2, “Misc Property Sheets”](#), on page 15.
2. Click a property sheet tab to view all of the board parameters associated with a particular property sheet. For example, to view the parameters associated with the Physical property sheet, click the **Physical** tab. Refer to Figure 14.


Refer to the DCM Online Help for a description of property sheets and parameters. The DCM Online Help can be accessed from the Help pull-down menu located on the DCM main window or by pressing the F1 key. To access information about a specific parameter, highlight the parameter in the DCM and press the F1 key.

3. Select a parameter by clicking it; the selected parameter and its current value are displayed on the bottom of the property sheet.
4. In the Value box of the property sheet, type the parameter value or select a value from the drop-down list.
5. Click **Apply** to save the change.
6. Repeat this procedure for all parameters that need to be modified.
7. Click **OK** to save all your changes and return to the DCM main window.

Note: It is possible to assign a different PCD file to a board by using the above procedure and changing the value of **PCDFileName** on the board’s Misc property sheet.

If you need to change additional FCD file parameters, see [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60. Otherwise, proceed with [Section 4.11, “Initializing the System”](#), on page 61.

Figure 14. Physical Property Sheet

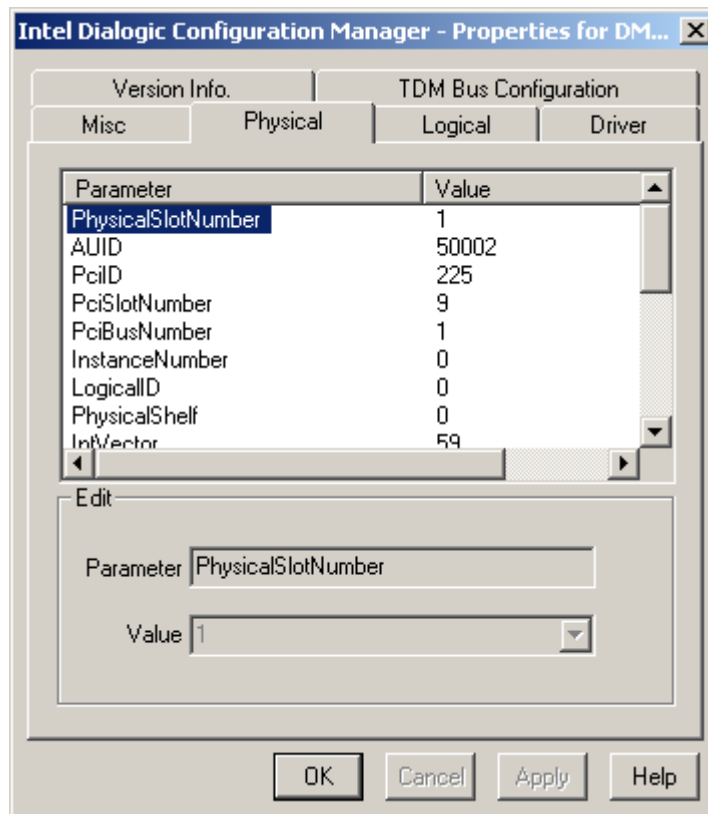

4.9 Setting the FSK Transmit and Receive Signal Levels

Two-way Frequency Shift Keying (FSK) and ETSI FSK allow the exchange of small amounts of data between a telephone and the server using FSK as the transport layer. The two-way FSK functionality allows products to transmit and receive half-duplex FSK Bell 202 1200 bps data over the Public Switch Telephone Network (PSTN). ETSI FSK functionality is based on the specification ETSI 201 912.

The Transmit and Receive Signal Level parameters allow you to adjust the signal level of both the transmit and receive FSK signal levels.

FSK Transmit Signal Level

To set the signal level of the FSK transmit signal to other than the default value of -14 dbm, you will need to edit the applicable CONFIG file. For example, to set the FSK transmit signal level to a value of -20dbm, you need to add a new section [0x2a] at the end of the CONFIG file and include the FSK Transmit Signal Level parameter in that section as follows:

```
[0x2a]
SetParm=0x2a04,-20          !FM_ParmFSKTxSignalLevel
```

The value can range from -50 to -5dbm.

FSK Receive Signal Level

To set the signal level of the FSK receive signal to other than the default value of -46dbm, you also need to edit the CONFIG file by adding the FSK Receive Signal parameter to the new [0x2a] section. For example, to set the receive signal level to a value of -15dbm, add the line shown in bold to the new section you created for the FSK Transmit Signal Level parameter:

```
[0x2a]
SetParm=0x2a04,-20          !FM_ParmFSKTxSignalLevel
SetParm=0x2a00,-15          !FM_ParmFSKRxSignalLevel
```

The value can range from -60 to -5dbm.

After editing the CONFIG file, you will need to generate a new FCD file. Refer to [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60.

4.10 Modifying the FCD File Parameters

If the default settings in the FCD files are not appropriate for your configuration, you can modify the FCD file parameters using the CONFIG file and the *fcdgen* utility. Modifications can be made at any time prior to starting the system. For each FCD file to be modified, the procedure includes:

1. [Editing the CONFIG File](#)
2. [Generating the FCD File](#)

4.10.1 Editing the CONFIG File

The first step in generating a modified FCD file is to edit the corresponding CONFIG file. Once the CONFIG file parameters are modified, the *fcdgen* utility is used to convert the CONFIG file to an FCD file.

Note: If you want to preserve the default parameter values contained in the CONFIG file, make a backup copy of the file prior to editing it.

To edit the CONFIG file:

1. From the command prompt, go to the `\Program Files\Dialogic\Data` directory and locate the CONFIG file.
2. Using a text editor (for example, WordPad), open the CONFIG file that corresponds to the FCD file you want to modify. By default, the CONFIG file will have the same file name as the FCD file, but with a *.config* extension.

3. Edit the CONFIG file as necessary.

For a detailed description of the CONFIG file sections and formatting conventions, see [Chapter 3, “CONFIG File Details”](#). For details about CONFIG file parameters, see [Chapter 6, “CONFIG File Parameter Reference”](#).

4. Save and close the CONFIG file.

Proceed with [Section 4.10.2, “Generating the FCD File”](#), on page 61.

4.10.2 Generating the FCD File

In order to generate an FCD file, the corresponding CONFIG file must be converted to an FCD file. *fcdgen* converts the CONFIG file into a format that can be read directly by the downloader.

1. From the command prompt, go to the *\Program Files\Dialogic\Data* directory.
2. Execute *fcdgen* as follows:

```
..\bin\fcdgen -f <input file>.config -o <output file>.fcd
```

For example:

```
..\bin\fcdgen -f qs_t1.config -o qs_t1.fcd
```

The resulting FCD file is created in the *\Program Files\Dialogic\Data* directory. If the *-o* option is omitted from the command, the default output FCD file will have the same filename as the user-modified input configuration file, but with a *.fcd* extension.

Proceed with [Section 4.11, “Initializing the System”](#), on page 61.

4.11 Initializing the System

Note: The new configuration settings will not take effect until the system is initialized. Before system initialization, make sure you perform all of the necessary configuration procedures.

To initialize the system for the first time, proceed as follows:

1. From the DCM main window, select the root of the tree structure (Configured Devices on...).
2. Choose **Device > Enable Device(s)** or click the Enable Device(s) icon on the DCM toolbar.
3. Choose **System > Start System** or click the Start all Enabled Devices icon on the DCM toolbar.
4. Verify the system has started (indicated by a status of “Started” in the System Service Status line at the bottom of the DCM main window).
5. After starting the system for the first time, you may want to use some of the tools provided by the system software to verify that your system is operating properly. Look in the *\Program Files\Dialogic\Demos* directory for demo programs.

6. If you have problems, see the Troubleshooting section of the *System Release Administration Guide*. Problems on initial startup are typically caused by errors in your configuration settings.

If you are using Global Call CDP files, proceed with [Section 4.12, “Downloading Global Call CDP File Parameters”](#), on page 62.

Once the system is initialized for the first time, the system can be reconfigured and re-initialized as described in [Section 4.13, “Reconfiguring the System”](#), on page 62.

4.12 Downloading Global Call CDP File Parameters

The Global Call Protocol Package includes the “hotloadable” protocol modules (*.hot*) and the protocol configuration files (*.cdp*). The HOT (*.hot*) file is the compiled object that contains the protocol logic for a particular country. The CDP (*.cdp*) file contains the configuration parameters.

The Global Call protocols are provided in a separately orderable Global Call Protocol Package. For information about the Global Call Protocol Package, see your Sales representative. Follow the configuration instructions for protocols in the *Global Call Country Dependent Parameters (CDP) Configuration Guide*. This guide is included with the Global Call Protocol Package CD and contains information about modifying the country dependent parameters associated with a protocol.

4.13 Reconfiguring the System

Once the system is initialized for the first time, if you need to modify and re-download the parameters, performing the following in the DCM.

1. Before you stop the system, stop the application ensuring all channels have been closed.
2. Launch the DCM by choosing **Programs > Intel Dialogic System Release 6.0 PCI > Configuration Manager-DCM** from the Windows Start menu. The DCM main window is displayed. Refer to [Figure 1, “DCM Main Window”](#), on page 14.
3. Stop either the complete Intel Dialogic System or a single board, as appropriate:
 - To stop the system, choose **System > Stop System** or click the Stop System icon in the DCM main window before changing parameter values. The system is stopped once “Stopped” is displayed on the status line at the bottom of the DCM main window.
 - To stop a single board, choose **Device > Stop Device**.
4. Double-click the board model name to display the configuration data property sheets pertaining to the board. Refer to [Figure 1, “DCM Main Window”](#), on page 14.
5. If you wish to restore the board’s DCM parameter settings to their default values, choose **Device > Restore Defaults** in the DCM main window. This resets *all* of the board’s modified parameters to their default values in the DCM.

6. If you wish to reset the FCD file parameters to their default values, perform the following:
 - Note:** This step only applies if a backup copy of the CONFIG file was made prior to modifying the parameters.
 - 6a. Rename the backup CONFIG file to its original file name.
 - 6b. Generate a new FCD file as described in [Section 4.10.2, “Generating the FCD File”](#), on page 61.
7. Modify parameters as described in any of the following procedures that apply:
 - [Section 4.4, “Selecting a Configuration File Set”](#), on page 52
 - [Section 4.5, “Setting the TDM Bus Clock Source”](#), on page 54
 - [Section 4.6, “Setting the Bus Companding Method for DM3 Configurations”](#), on page 55
 - [Section 4.7, “Configuring the Network Interface Connector”](#), on page 56
 - [Section 4.8, “Modifying Other DCM Property Sheet Parameters”](#), on page 58
 - [Section 4.10, “Modifying the FCD File Parameters”](#), on page 60
8. When you’re finished changing parameters, restart the Intel Dialogic System or a single boards, as appropriate:
 - Start the whole system by choosing **System > Start System** or clicking the Start System icon in the DCM main window. The system is started once “Started” is displayed on the status line at the bottom of the DCM main window. The firmware and new configuration settings are downloaded once the system is started.
 - To start a single board, choose **Device > Start Device**. The firmware and new configuration settings are downloaded to the board once the board is started.

For detailed procedures about reconfiguration and other administrative tasks, see the system release administration guide supplied with your software.

This section lists and describes all parameters contained in the configuration manager (DCM). Parameters are grouped based on the property sheet on which they reside. DCM property sheets include the following:

• Driver Property Sheet	65
• Logical Property Sheet	67
• Misc Property Sheet	68
• Network Property Sheet	72
• Physical Property Sheet	74
• TDM Bus Configuration Property Sheet	78
• Telephony Bus Property Sheet	86
• Trunk Configuration Property Sheet	87
• Version (Version Info.) Property Sheet	88

5.1 Driver Property Sheet

The Driver property sheet allows you to optimize the board's throughput by customizing certain aspects of the Intel® NetStructure™ IPT Series board's device driver. The Driver property sheet contains the following parameters:

- doDMA
- freeOrphanOnDepletion
- maxOrphanStrmSize
- orphanageMsgLen
- orphanageMsgTimeout
- orphanStrmTableSize
- outStrmQuantum
- sramInQuantum
- sramOutQuantum
- sramOutTimer

doDMA

Description: The **doDMA** parameter indicates whether DMA (direct memory access) read access is enabled or disabled.

Values:

- 0: Off (DMA read access is disabled)
- 1 [default]: On (DMA read access is enabled)

freeOrphanOnDepletion

Description: The **freeOrphanOnDepletion** parameter specifies whether the protocol driver frees the orphan buffer after it has been read completely.

Values:

- 0 [default]: No (do not free the orphan buffer)
- 1: Yes (free the orphan buffer)

maxOrphanStrmSize

Description: The **maxOrphanStrmSize** parameter specifies the maximum size, in bytes, of each orphan stream buffer. When this value is set to 0, the protocol driver attempts to allocate as much buffer as possible.

Values: A positive integer (byte). The default value is 0.

Guidelines: Use the **maxOrphanStrmSize** parameter default value.

orphanageMsgLen

Description: The **orphanageMsgLen** parameter specifies the maximum size, in bytes, of the message orphan buffer.

Values: 8096 to 32768 (bytes). The default value is 8192.

Guidelines: Use the **orphanageMsgLen** parameter default value.

orphanageMsgTimeout

Description: The **orphanageMsgTimeout** parameter specifies the time out, in seconds, for orphan messages.

Values: 3 to 180 (seconds). The default value is 30.

Guidelines: Use the **orphanageMsgTimeout** parameter default value.

orphanStrmTableSize

Description: The **orphanStrmTableSize** parameter specifies the maximum number of streams in the orphan table.

Values: A positive integer. The default value is 256.

Guidelines: Use the **orphanStrmTableSize** parameter default value.

outStrmQuantum

Description: The **outStrmQuantum** parameter specifies the maximum number of outbound data blocks per stream. The protocol driver uses this value during its outbound session to allow all ready streams equal priority to the SRAM.

Values: 1 to 10 (The default value is 1.)

Guidelines: Use the **outStrmQuantum** parameter default value.

sramInQuantum

Description: The **sramInQuantum** parameter specifies the maximum number of inbound data blocks for all streams. The protocol driver uses this value during an inbound session to cap the total number of data blocks read from the SRAM. When this parameter is set to 0, there is no limit for inbound data blocks for all streams.

Values: 0 to 120 (The default value is 0.)

Guidelines: Use the **sramInQuantum** parameter default value.

sramOutQuantum

Description: The **sramInQuantum** parameter specifies the maximum number of outbound data blocks for all streams. The protocol driver uses this value during an outbound session to cap the total number of data blocks written to the SRAM.

Values: 1 to 120 (The default value is 120.)

Guidelines: Use the **sramOutQuantum** parameter default value.

sramOutTimer

Description: The **sramOutTimer** parameter specifies the outbound timer rate in milliseconds.

Values: 1 to 100 (milliseconds). The default value is 12.

Guidelines: Use the **sramOutTimer** parameter default value.

5.2 Logical Property Sheet

The Logical property sheet contains the following parameters:

- [CurrentState](#)

CurrentState

Description: The **CurrentState** parameter is a read-only parameter that specifies the current state of the board.

Values:

- Initialized: Board detected
- Reset: Board reset by downloader
- ConfigPending: Board configuration pending
- Configured: Board configuration complete
- Running: Board running
- Quiescent: Board I/O activities have been closed in preparation for a shutdown
- Shutdown: Board stopped

Guidelines: The **CurrentState** parameter is read-only and cannot be modified by the user.

5.3 Misc Property Sheet

The Misc property sheet contains miscellaneous parameters that include the following:

- [PassiveMode](#)
- [Board monitoring frequency in seconds](#)
- [BoardEnabled](#)
- [BoardPresent](#)
- [ProcessTimeout\(Seconds\)](#)
- [FCDFilename](#)
- [PCDFilename](#)
- [ReplyMsgTimeout](#)
- [TraceEnable](#)
- [TraceLevel](#)
- [AdministrativeStatus](#)
- [OperationalStatus](#)
- [Physical State](#)
- [PnPAutoDownload](#)

PassiveMode

Note: The **PassiveMode** parameter is only applicable to the TDM Bus, Bus-0 device. Also, it is the only Misc property sheet parameter applicable to the Bus-0 device.

Description: The **PassiveMode** parameter specifies whether clocking faults are handled or ignored by the system software.

Values:

- True: The system software will not respond to clocking faults.
- False [default]: The system software handles clocking faults (such as, performing clock fallback)

Guidelines: Set **PassiveMode** parameter to False to implement clock fallback support.

Board monitoring frequency in seconds

Description: The **Board monitoring frequency in seconds** parameter specifies in seconds, the frequency at which the board status is monitored.

Values: Time (seconds). The default value is 10.

Guidelines: The **Board monitoring frequency in seconds** parameter is read/write.

BoardEnabled

Description: The **BoardEnabled** parameter specifies whether or not the Intel® Dialogic® System Software should download firmware to activate the board.

Values:

- Yes [default]
- No

Guidelines: Set the **BoardEnabled** parameter to a value of No to temporarily suspend the use of a board.

BoardPresent

Description: The **BoardPresent** parameter indicates whether or not the board is physically present in the system and was detected by the Intel Dialogic System Software. A value of No is displayed if you enter configuration data for a board that is not in the system or if a board is improperly installed or malfunctioning.

Values:

- Yes
- No

Guidelines: The **BoardPresent** parameter is read only and cannot be modified by the user.

ProcessTimeout(Seconds)

Description: The **ProcessTimeout(Seconds)** parameter specifies the amount of time in seconds that the downloader will wait for a child process to complete.

Values: 10 to 120 (seconds). The default value is 120.

FCDFileName

Description: The **FCDFileName** parameter specifies the name of a board's Feature Configuration Description (FCD) file. The purpose of the FCD file is to adjust the component settings that make up each product. Each DM3 board in the system requires an FCD file.

Values: A valid FCD file name.

Guidelines: To ensure that an applicable FCD file is downloaded to your board, use the Restore Device Defaults option from the DCM Action menu to invoke the Assign Firmware File dialog box. The Assign Firmware File dialog box allows you to select a PCD File to download to your board. When you select a PCD file from the Assign Firmware File dialog box's Available Firmware list, the system automatically selects the applicable FCD file.

Note: HDSI boards use country-specific FCD and PCD files. Depending on the FCD/PCD files selected for an HDSI board, the PCM encoding method will be set to either A law or Mu law, based on the default value for that country. If this value is not the same as the TDM Bus Media Type parameter setting, the HDSI board will fail to download.

PCDFileName

Description: The **PCDFileName** parameter specifies the name of a board's Product Configuration Description (PCD) file. The PCD file lists object files and maps them to specific processors, configures the kernel for each processor, and sets the number of component instances to run on each processor. Each DM3 board in the system requires a PCD file.

Values: A valid PCD file name.

Guidelines: To ensure that an applicable PCD file is downloaded to your board, use the Restore Device Defaults option from the DCM's Action menu to invoke the Assign Firmware File dialog box. The Assign Firmware File dialog box allows you to select a PCD File to download to your board. When you select a PCD file from the Assign Firmware File dialog box's Available Firmware list, the system automatically selects the applicable FCD file as well.

ReplyMsgTimeout

Description: The **ReplyMsgTimeout** parameter specifies the maximum time in seconds that the downloader will wait for a reply message.

Values: 10 to 30 (seconds). The default value is 10.

TraceEnable

Description: The **TraceEnable** parameter indicates whether trace logging of the download process is enabled or disabled. When trace logging is enabled, a log file called *brdn.log*, where *n* equals the board number, is created in *C:\Program Files\Dialogic\bin*.

Values:

- 0: Off (trace logging is disabled) [default]
- 1: On (trace logging is enabled)

TraceLevel

Description: The **TraceLevel** parameter specifies the detail level of trace logging.

Values:

- 2 [default]: Display errors only
- 3: Display all details

AdministrativeStatus

Description: The **AdministrativeStatus** parameter indicates the status of the currently selected device.

Values:

- Initial: The software representation of the board is created when the board's **Physical State** parameter is *In_System_Locked*.
- Stopped: The currently selected device is not running
- Started: The currently selected device is running.
- StopPending: The system software is in the process of stopping the currently selected device.
- StartPending: The system software is in the process of starting the currently selected device.
- Disabled: The currently selected device is not started when the system is started.
- Diagnose: Diagnostics are currently being run on the device.

Guidelines: The **AdministrativeStatus** parameter is read only and cannot be modified by the user.

OperationalStatus

Description: The **OperationalStatus** parameter indicates the integrity of the currently selected device.

Values:

- Initial: The software representation of the board is created when the board's **Physical State** parameter is *In_System_Locked*.
- Ok: The currently selected device is operating normally.
- Degraded: The currently selected device is operating at a below optimum level.
- Failed: The currently selected device has failed. Use the Windows* Event Viewer to determine the nature of the problem.

Physical State

Description: The **Physical State** parameter indicates the physical state of a board.

Values:

- In_System_Locked: The board is fully installed and recognized by the system.
- Out_Of_System: The board has been physically removed from the system, but not from the registry (DCM database).
- In_System_Unlocked: The board is physically installed, but the handles are in the open position.

Guidelines: The **Physical State** parameter is read only and cannot be modified by the user.

PnPAutoDownload

Description: The **PnPAutoDownload** parameter determines whether or not the Intel Dialogic Plug and Play* subsystem automatically starts the board when the system reboots.

Values:

- No [default]
- Yes

Guidelines: The **PnPAutoDownload** parameter should not be modified by the user. If System/Device Autostart (from the DCM Settings pull-down menu) is set to Detect and Start, then the system software automatically resets this parameter to Yes for all boards in your chassis.

5.4 Network Property Sheet

The Network property sheet contains parameters that allow you to configure the network interfaces on an Intel® NetStructure™ DM/IP board. The Network property sheet contains the following parameters:

Note: The Network property sheet only applies to Intel NetStructure DM/IP series boards.

- [IPAddress](#)
- [SubnetMask](#)
- [TargetName](#)
- [HostName](#)
- [UserName](#)
- [GatewayIPAddress](#)

IPAddress

Description: The **IPAddress** parameter specifies the IP address to be assigned to the network interface card (NIC) on the Intel NetStructure DM/IP Series board. Incoming calls to the board should be directed to this address.

Values: A valid IP address in the format 123.123.123.123. (The default value is 0.0.0.0.)

Guidelines: Each board in the system must have a different IP address. Extra spaces in this parameter field may cause the board to fail at download.

SubnetMask

Description: The **SubnetMask** parameter determines whether Ethernet* packets should be sent directly to a particular address or to a default router.

Values: A dotted decimal IP address format where 255 is the mask. (The default value is 255.255.255.0.)

Guidelines: Set the **SubnetMask** parameter according to site IP procedures. Extra spaces in this parameter field may cause the board to fail at download.

TargetName

Description: The **TargetName** parameter specifies the name of the NIC on the Intel NetStructure DM/IP Series board.

Values: The name of the NIC on the board.

Guidelines: Extra spaces in this parameter field may cause the board to fail at download.

HostName

Description: The **HostName** parameter specifies the name of the host machine whose IP address is defined using the **HostIPAddress** parameter.

Values: The name of the host machine whose address is defined in the **HostIPAddress** parameter.

Guidelines: Extra spaces in this parameter field may cause the board to fail at download.

UserName

Description: The **UserName** parameter specifies the user name with log in access to the host machine.

Values: A valid username with log in access to the host machine specified in the **HostName** parameter.

Guidelines: Extra spaces in this parameter field may cause the board to fail at download.

GatewayIPAddress

Description: The **GatewayIPAddress** parameter specifies the IP address of the default router for the Ethernet interface.

Values: A valid IP address in the format 123.123.123.123. (The default value is 0.0.0.0.)

Guidelines: Extra spaces in this parameter field may cause the board to fail at download.

5.5 Physical Property Sheet

The Physical property sheet contains parameters for configuring the way the board works with your system, for example, the memory address and interrupt used by the boards. The Physical property sheet contains the following parameters:

- [PhysicalSlotNumber](#)
- [AUID](#)
- [PciID](#)
- [PciSlotNumber](#)
- [PciBusNumber](#)
- [InstanceNumber](#)
- [LogicalID](#)
- [PhysicalShelf](#)
- [IntVector](#)
- [IRQLevel](#)
- [PLXlength](#)
- [PLXAddr](#)
- [SRAMlength](#)
- [SRAMAddr](#)
- [SRAMSize](#)
- [DlgeOUI](#)
- [PrimaryBoardID](#)
- [SecondaryBoardID](#)
- [SerialNumber](#)

PhysicalSlotNumber

Description: The **PhysicalSlotNumber** parameter specifies the number of the physical slot in which the cPCI board is installed.

Values: A positive integer or hexadecimal value

Guidelines: The **PhysicalSlotNumber** parameter is read-only and only applies to cPCI boards. A value of 1 indicates the first slot on the left.

AUID

Description: The **AUID** parameter defines the Addressable Unit Identifier (AUID) of the Intel NetStructure board. The AUID is a unique string of numbers that identifies an Intel Dialogic system component with which communications may be initiated. In the context of the DCM, the AUID is a unique identifier for an Intel NetStructure IPT Series board.

Values: A positive integer or hexadecimal value

Guidelines: The **AUID** parameter is read only and cannot be modified by the user.

PciID

Description: The **PciID** parameter specifies a board's rotary-switch setting. The rotary-switch setting for DM3 architecture boards can be the same for all boards in the system if the value is set to 0.

Values: 0 to 15 (The default is 0.)

Guidelines: Use the **PciID** parameter default value.

PciSlotNumber

Description: The **PCISlotNumber** denotes the number of the CompactPCI slot in which the board is installed.

Values: A positive integer or hexadecimal value

Guidelines: The **PCISlotNumber** parameter is set by the system software and should not be changed by the user.

PciBusNumber

Description: The **PCIBusNumber** parameter indicates the number of the CompactPCI bus on which the board is installed.

Values: A positive integer or hexadecimal value

Guidelines: The **PciBusNumber** parameter is set by the system software and should not be changed by the user.

InstanceNumber

Description: The **InstanceNumber** parameter is the driver-assigned ID used to identify a board in the system. Driver-assigned IDs start from 0 and ID assignments are made in the order in which the boards were detected when the system started.

Values: A positive integer.

Guidelines: The **InstanceNumber** parameter is set by the system software and should not be changed by the user.

LogicalID

Description: The **LogicalID** parameter is a user-assigned identification number used by the drivers to identify the board.

Values: A positive integer from 0 to 255. The default is the value of the **InstanceNumber** parameter.

PhysicalShelf

Description: The **PhysicalShelf** parameter denotes the number of the shelf in which the board is installed. Individual CompactPCI chassis can be assigned unique shelf identification numbers.

The shelf identification number for a chassis can then be reported by any board that is plugged into the chassis backplane.

Values: A positive integer or hexadecimal value

Guidelines: The **PhysicalShelf** parameter is determined by the CompactPCI chassis. It only applies to CompactPCI boards and cannot be modified through the DCM.

IntVector

Description: The **IntVector** parameter identifies the vector associated with the board interrupt.

Values: Vector number set by the system software.

Guidelines: The **IntVector** parameter is set by the system software and should not be changed by the user.

IRQLevel

Description: The **IRQLevel** parameter specifies the interrupt request level assigned to a board by the system.

Values: Interrupt request level set by the system software.

Guidelines: The **IRQLevel** parameter is set by the system software and should not be changed by the user.

PLXlength

Description: The **PLXlength** parameter is the number of consecutive addresses past the first assigned address. This parameter is for information purposes only.

Values: Positive number set by the system software.

Guidelines: The **PLXlength** parameter is set by the system software and should not be changed by the user.

PLXAddr

Description: The **PLXAddr** parameter is the physical address assigned to a board by the operating system. This parameter is for information purposes only.

Values: Physical address set by the system software.

Guidelines: The **PLXAddr** parameter is set by the system software and should not be changed by the user.

SRAMlength

Description: The **SRAMlength** parameter specifies the size, in bytes, of the shared RAM. This parameter is for information purposes only.

Values: A positive number (bytes) set by the system software.

Guidelines: The **SRAMlength** parameter is set by the system software and should not be changed by the user.

SRAMAddr

Description: The **SRAMAddr** parameter specifies the system's physical memory address assigned or mapped to the shared RAM.

Values: Memory address set by the system software.

Guidelines: The **SRAMAddr** parameter is set by the system software and should not be changed by the user.

SRAMSize

Description: The **SRAMSize** parameter The size, in bytes, of the physical shared RAM installed on a board.

Values: A positive number (bytes) set by the system software.

Guidelines: The **SRAMSize** parameter is set by the system software and should not be changed by the user.

DlgeOUI

Description: The **DlgeOUI** parameter specifies the unique ID number assigned to Dialogic DM3 boards by the Institute of Electrical and Electronic Engineers (IEEE).

Values: Unique identification number set by the system software.

Guidelines: The **DlgeOUI** parameter is set by the system software and should not be changed by the user.

PrimaryBoardID

Description: The **PrimaryBoardID** parameter is the Intel Dialogic Product Assembly Type and DM3 Model Number assigned to a board.

Values: Model number set by the system software.

Guidelines: The **PrimaryBoardID** parameter is set by the system software and should not be changed by the user.

SecondaryBoardID

Description: The **SecondaryBoardID** parameter is used to further specify the DM3 Model Number assigned to the board.

Values: Model number set by the system software.

Guidelines: The **SecondaryBoardID** parameter is currently not used.

SerialNumber

Description: The **SerialNumber** parameter specifies the unique serial number of the board.

Values: Serial number set by the system software.

Guidelines: The **SerialNumber** parameter is set by the system software and should not be changed by the user.

5.6 TDM Bus Configuration Property Sheet

The TDM Bus Configuration property sheet contains parameters for configuring the TDM Bus. (For a discussion of TDM Bus concepts, [Section 2.6, “CT Bus Clock Fallback”](#), on page 26.) User Defined parameters are provided in this section; Resolved equivalent parameters are not listed in this section. For more information about User Defined and Resolved equivalent parameters, refer to [Section 2.2, “TDM Bus Parameters”](#), on page 16.

Note: To access the TDM Bus Configuration property sheet, expand the TDM Bus device in the DCM main window, then double click on the Bus-0 device. Do not access the TDM Bus Configuration property sheet when configuring a board device (by double clicking on the board model from the DCM main window). When accessing the property sheet in this way, only a subset of parameters are viewable and they are all read only.

- [TDM Bus Type \(User Defined\)](#)
- [SCbus Clock Rate \(User Defined\)](#)
- [Media Type \(User Defined\)](#)
- [Group One Clock Rate \(User Defined\)](#)
- [Group Two Clock Rate \(User Defined\)](#)
- [Group Three Clock Rate \(User Defined\)](#)
- [Group Four Clock Rate \(User Defined\)](#)
- [Using Compatibility Clocks \(User Defined\)](#)
- [Primary Lines \(User Defined\)](#)
- [Using Primary Master \(User Defined\)](#)
- [Using Secondary Master \(User Defined\)](#)
- [Using NETREF One \(User Defined\)](#)
- [Using NETREF Two \(User Defined\)](#)
- [Primary Master FRU \(User Defined\)](#)
- [Derive Primary Clock From \(User Defined\)](#)
- [Secondary Master FRU \(User Defined\)](#)
- [Derive Secondary Clock From \(User Defined\)](#)
- [NETREF One FRU \(User Defined\)](#)
- [Derive NETREF One From \(User Defined\)](#)
- [NETREF One Clock Rate \(User Defined\)](#)
- [NETREF Two FRU \(User Defined\)](#)
- [Derive NETREF Two From \(User Defined\)](#)
- [NETREF Two Clock Rate \(User Defined\)](#)
- [StartTimeSlot](#)

TDM Bus Type (User Defined)

Description: The **TDM Bus Type (Resolved/User Defined)** parameter determines the bus mode for the currently selected TDM bus.

Values:

- Default [default]: The value of this parameter is to be determined by the system software.
- MVIP: The mode for the selected bus is MVIP.
- SCbus: The mode for the selected bus is SCbus.
- H.100: The mode for the selected bus is H.100.
- H.110: The mode for the selected bus is H.110.

Guidelines: Use the **TDM Bus Type (User Defined)** parameter default value. The value you set for this parameter may not be accepted by the system software. To determine the value that the system will use, check the value of the Resolved Equivalent.

SCbus Clock Rate (User Defined)

Description: The **SCbus Clock Rate (User Defined)** parameter determines the clock rate for the SCbus and only applies when the bus is running in SCbus mode (that is, when the **TDM Bus Type** parameter is set to SCbus).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 2MHz: The SCbus operates at 2 MHz.
- 4MHz: The SCbus operates at 4 MHz.
- 8MHz: The SCbus operates at 8 MHz.

Guidelines: The **SCbus Clock Rate (User Defined)** parameter does not apply to DM3 architecture boards.

Media Type (User Defined)

Description: The **Media Type (User Defined)** parameter determines the encoding method for the currently selected TDM bus.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- ALaw: The encoding method is A-law (this is the method that should be used for E1 trunks).
- MuLaw: The encoding method is mu-law (this is the method that should be used for T1 trunks).
- ClearChannel: This value is currently not supported.

Group One Clock Rate (User Defined)

Description: The **Group One Clock Rate (User Defined)** parameter determines the clock rate for the first group of streams, in the first set of streams, in an H.100/H.110 bus. The first set of

sixteen streams in the H.100/110 bus is divided into four groups of four streams each. Each group can operate at a different clock speed. (The second set of sixteen streams in the H.100/110 bus always operates at 8 MHz).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 2MHz: The first four-stream group operates at 2 MHz.
- 4MHz: The first four-stream group operates at 4 MHz.
- 8MHz: The first four-stream group operates at 8 MHz.

Group Two Clock Rate (User Defined)

Description: The **Group Two Clock Rate (User Defined)** parameter determines the clock rate for the second group of streams, in the first set of streams, in an H.100/H.110 bus. The first set of sixteen streams in the H.100/110 bus is divided into four groups of four streams each. Each group can operate at a different clock speed. (The second set of sixteen streams in the H.100/110 bus always operates at 8 MHz).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 2MHz: The second four-stream group operates at 2 MHz.
- 4MHz: The second four-stream group operates at 4 MHz.
- 8MHz: The second four-stream group operates at 8 MHz.

Group Three Clock Rate (User Defined)

Description: The **Group Three Clock Rate (User Defined)** parameter determines the clock rate for the third group of streams, in the first set of streams, in an H.100/H.110 bus. The first set of sixteen streams in the H.100/110 bus is divided into four groups of four streams each. Each group can operate at a different clock speed. (The second set of sixteen streams in the H.100/110 bus always operates at 8 MHz).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 2MHz: The third four-stream group operates at 2 MHz.
- 4MHz: The third four-stream group operates at 4 MHz.
- 8MHz: The third four-stream group operates at 8 MHz.

Group Four Clock Rate (User Defined)

Description: The **Group Four Clock Rate (User Defined)** parameter determines the clock rate for the fourth group of streams, in the first set of streams, in an H.100/H.110 bus. The first set of sixteen streams in the H.100/110 bus is divided into four groups of four streams each. Each

group can operate at a different clock speed. (The second set of sixteen streams in the H.100/110 bus always operates at 8 MHz).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 2MHz: The fourth four-stream group operates at 2 MHz.
- 4MHz: The fourth four-stream group operates at 4 MHz.
- 8MHz: The fourth four-stream group operates at 8 MHz.

Using Compatibility Clocks (User Defined)

Description: The **Using Compatibility Clocks (User Defined)** parameter indicates whether the SpringWare compatibility clock is used.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- Yes: The compatibility clock is in use.
- No: The compatibility clock is not in use.

Guidelines: The **Using Compatibility Clocks (User Defined)** does not apply to DM3 architecture boards.

Primary Lines (User Defined)

Description: The **Primary Lines (User Defined)** parameter determines whether the Primary Line is Line A or Line B. The line that is not selected as the Primary Line serves as the Secondary Line.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- A: The primary line is Line A.
- B: The primary line is Line B.

Using Primary Master (User Defined)

Description: The **Using Primary Master (User Defined)** parameter indicates whether or not the device specified by the **Primary Master FRU** parameter is the Clock Master for the currently selected bus. Use this parameter to take the Primary Master FRU offline in the event that it needs to be replaced.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- No: The device specified by the Primary Master FRU parameter is not the Clock Master for the currently selected bus. This value is set by the system for a short period when the Primary

Master FRU fails and the Secondary Master FRU is being promoted to bus master. Otherwise, this parameter cannot have the value No when the system is running.

- Yes: The device specified by the Primary Master FRU parameter is the Clock Master for the currently selected bus.

Using Secondary Master (User Defined)

Description: The **Using Secondary Master (User Defined)** parameter

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- No: The device specified by the **Primary Master FRU** parameter is not the Clock Master for the currently selected bus. This value is set by the system for a short period when the Primary Master FRU fails and the Secondary Master FRU is being promoted to bus master. Otherwise, this parameter cannot have the value No when the system is running.
- Yes: The device specified by the **Secondary Master FRU** parameter is the Clock Master for the currently selected bus.

Using NETREF One (User Defined)

Description: The **Using NETREF One (User Defined)** parameter determines whether or not NETREF_1 is used as the source of clocking for the current Clock Master. This parameter enables you to temporarily disconnect the network interface that drives NETREF_1 (as determined by the **Derive NETREF One From** parameter).

If this parameter is set to Yes, Derive NETREF One From (Resolved) is set to the value specified by Derive NETREF One From (User Defined) and NETREF One FRU (Resolved) is set to the value specified by NETREF One FRU (User Defined).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- No: NETREF_1 is not in use. (Derive **NETREF One From (Resolved)** and **NETREF One FRU (Resolved)** parameters are both set to Not Applicable.)
- Yes: NETREF_1 is in use. (Derive **NETREF One From (Resolved)** is set to the value specified by **Derive NETREF One From (User Defined)** and NETREF One FRU (Resolved) is set to the value specified by **NETREF One FRU (User Defined)**).

Using NETREF Two (User Defined)

Description: The **Using NETREF Two (User Defined)** parameter determines whether or not NETREF_2 is used as the source of clocking for the current Clock Master. This parameter

enables you to temporarily disconnect the network interface that drives NETREF_2 (as determined by the **Derive NETREF Two From** parameter).

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- No: NETREF_2 is not in use. (Derive **NETREF Two From(Resolved)** and **NETREF Two FRU (Resolved)** parameters are both set to Not Applicable.)
- Yes: NETREF_2 is in use. (Derive **NETREF Two From(Resolved)** is set to the value specified by **Derive NETREF Two From (User Defined)** and **NETREF Two FRU (Resolved)** is set to the value specified by **NETREF Two FRU (User Defined)**.)

Primary Master FRU (User Defined)

Description: The **Primary Master FRU (User Defined)** parameter identifies the field replaceable unit (FRU) or technology that drives the clocking line specified by the **Primary Lines** parameter.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- <device name>: Name of the device (board) that drives the TDM Bus clocking.

Guidelines: Do not use a board that is configured as resource only for the **Primary Master FRU**.

Derive Primary Clock From (User Defined)

Description: The **Derive Primary Clock From (User Defined)** parameter specifies the clock source that the **Primary Master FRU** uses to drive the primary line.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- FrontEnd_1: Not applicable to DM3 boards.
- FrontEnd_2: Not applicable to DM3 boards.
- FrontEnd_3: Not applicable to DM3 boards.
- FrontEnd_4: Not applicable to DM3 boards.
- InternalOscillator: The Primary Master derives clocking from its own circuitry.
- NETREF_1: The Primary Master derives clocking from NETREF_1.
- NETREF_2: The Primary Master derives clocking from NETREF_2.

Secondary Master FRU (User Defined)

Description: The **Secondary Master FRU (User Defined)** parameter specifies the FRU or technology that drives clocking for the secondary line.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- <device name>: Device name of an the H.100/110-enabled FRU.

Guidelines: Do not use a board that is configured as resource only for the **Secondary Master FRU**.

Derive Secondary Clock From (User Defined)

Description: The **Derive Secondary Clock From (User Defined)** parameter specifies the clock source that the **Secondary Master FRU** uses to drive the Secondary Line.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- InternalOscillator: The Secondary Master derives clocking from its own circuitry.
- NETREF_1: The Secondary Master derives clocking from NETREF_1.
- NETREF_2: The Secondary Master derives clocking from NETREF_2.

NETREF One FRU (User Defined)

Description: The **NETREF One FRU (User Defined)** parameter identifies the FRU containing the interface to the network line that drives NETREF_1.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- <device name>: Device name of an the H.100/H.110-enabled FRU.

Derive NETREF One From (User Defined)

Description: The **ClockSource** parameter specifies the network interface that determines the clocking for the NETREF_1 line. The indicated interface is on the FRU designated by the NETREF One FRU parameter.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- NetworkInterfaceOne: NETREF_1 is derived from interface 1 on the FRU designated by the **NETREF One FRU** parameter.
- NetworkInterfaceTwo: NETREF_1 is derived from interface 2 on the FRU designated by the **NETREF One FRU** parameter.
- NetworkInterfaceThree: NETREF_1 is derived from interface 3 on the FRU designated by the **NETREF One FRU** parameter.
- NetworkInterfaceFour: NETREF_1 is derived from interface 4 on the FRU designated by the **NETREF One FRU** parameter.

NETREF One Clock Rate (User Defined)

Description: The **NETREF One Clock Rate (User Defined)** parameter specifies

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 8KHz
- 1.536MHz
- 1.544MHz
- 2.048MHz

NETREF Two FRU (User Defined)

Description: The **NETREF Two FRU (User Defined)** parameter identifies the FRU containing the interface to the network line that drives NETREF_2.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- <device name>: Device name of an the H.100/H.110-enabled FRU.

Derive NETREF Two From (User Defined)

Description: The **Derive NETREF Two From (User Defined)** parameter specifies the network interface that determines the clocking for the NETREF_2 line. The indicated interface is on the FRU designated by the NETREF Two FRU parameter.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- NetworkInterfaceOne: NETREF_2 is derived from interface 1 on the FRU designated by the **NETREF Two FRU** parameter.
- NetworkInterfaceTwo: NETREF_2 is derived from interface 2 on the FRU designated by the **NETREF Two FRU** parameter.
- NetworkInterfaceThree: NETREF_2 is derived from interface 3 on the FRU designated by the **NETREF Two FRU** parameter.
- NetworkInterfaceFour: NETREF_2 is derived from interface 4 on the FRU designated by the **NETREF Two FRU** parameter.

NETREF Two Clock Rate (User Defined)

Description: The **NETREF Two Clock Rate (User Defined)** parameter determines the clock rate for the NETREF_2 line.

Values:

- Default [default]: The value of this parameter is to be determined by the system software. Its current value is indicated by the Resolved Equivalent.
- 8KHz
- 1.536MHz
- 1.544MHz
- 2.048MHz

StartTimeSlot

Description: The **StartTimeSlot** parameter is not currently used.

5.7 Telephony Bus Property Sheet

The Telephony Bus property sheet contains parameters for configuring the telephony bus, which connects the Intel NetStructure and Intel Dialogic boards to one another.

- [PCMEncoding](#)
- [BusType](#)

PCMEncoding

Description: The **PCMEncoding** parameter specifies the Pulse Code Modulation (PCM) encoding method(s) used on the selected board.

Values:

- Automatic [default]: The Intel NetStructure board will use mu-law for T1 configured interfaces and will use A-law for E1 configured interfaces.
- ULAW: mu-law encoding is used for all interfaces.
- ALAW: A-law encoding is used for all interfaces.

BusType

Description: The **BusType** parameter specifies the type of expansion bus cable that is connected to the board.

Values:

- None
- TDM Bus

Guidelines: The **BusType** parameter does not apply to the DM3 architecture boards.

5.8 Trunk Configuration Property Sheet

The Trunk Configuration property sheet contains parameters for configuring the interfaces on Intel® NetStructure DMN160TEC and DMT160TEC boards. Each parameter is in the format Trunkx, where x denotes the trunk number (1 to 16).

Note: The Trunk Configuration property sheet only applies to Intel® NetStructure™ DMN160TEC and DMT160TEC boards.

Trunk1 (to Trunk16)

Description: The **Trunk1** (to **Trunk16**) parameter specifies protocol and line type to use on each of the interfaces on the Intel® NetStructure™ DMN160TEC or DMT160TEC board.

Values:

- 4ess(T1) [default]
- 5ess(T1)
- dms(T1)
- net5(E1)
- ni2(T1)
- ntt(T1)
- qsige1(E1)
- qsigt1(T1)

Guidelines: Each of the 16 trunks can be assigned a different protocol, but each group of four trunks must be assigned protocols of the same line type. That is, trunks 1 to 4 must be configured

to use either T-1 or E-1 protocols, trunks 5 to 8 must be configured to use either T-1 or E-1 protocols, and so on.

For example, to configure trunks 9, 10, 11, and 12 to use the T-1 ISDN protocols 4ESS, 5ESS, DMS, and NI2, respectively, assign the following parameter values:

- **Trunk9** = 4ess(T-1)
- **Trunk10** = 5ess(T1)
- **Trunk11** = dms(T1)
- **Trunk12** = ni2(T1)

5.9 Version (Version Info.) Property Sheet

The Version (Version Info.) property sheet contains parameters that identify kernel versions and include the following:

- [CPBKVersion](#)
- [CPRTKVersion](#)
- [SPBKVersion](#)
- [SPRTKVersion](#)

CPBKVersion

Description: The **CPBKVersion** parameter indicates the control processor boot kernel version.

Values: Version number set by the system software.

Guidelines: The **CPBKVersion** parameter should not be modified by the user.

CPRTKVersion

Description: The **CPRTKVersion** parameter indicates the control processor runtime kernel version.

Values: Version number set by the system software.

Guidelines: The **CPRTKVersion** parameter should not be modified by the user.

SPBKVersion

Description: The **SPBKVersion** parameter indicates the signal processor boot kernel version.

Values: Version number set by the system software.

Guidelines: The **SPBKVersion** parameter should not be modified by the user.

SPRTKVersion

Description: The **SPRTKVersion** parameter indicates the signal processor runtime kernel version.

Values: Version number set by the system software.

Guidelines: The **SPRTKVersion** parameter should not be modified by the user.

This chapter lists and describes the parameters contained in the CONFIG files. Parameters are listed in the same order as they appear in the CONFIG files and they are grouped according to the CONFIG file sections. Within the CONFIG files, the parameters are grouped in the following sections.

• [0x44] Parameters	92
• [0x2b] Parameters	92
• [0x2c] Parameters	93
• [encoder] Parameters	97
• [recorder] Parameters	100
• [0x39] Parameters	101
• [0x3b] Parameters	102
• [0x3b.x] Parameters	102
• [lineAdmin.x] Parameters (Digital Voice)	103
• [LineAdmin.x] Parameters (Analog Voice)	109
• [NFAS] Parameters	110
• [NFAS.x] Parameters	111
• [CAS] Parameters for T1 E&M Signals	113
• [CAS] Parameters for T1 Loop Start Signals	115
• [CAS] Parameters for T1 Ground Start Signals	120
• [CAS] User-defined CAS and Tone Signal Parameters	125
• [CAS] User-defined Signals for Selectable Rings Parameters	126
• [CCS] Parameters	128
• [CHP] Parameters	132
• [CHP] T1 Protocol Variant Definitions	134
• [CHP] ISDN Protocol Variant Definitions	150
• [TSC] Parameters	158
• [TSC] defineBSet Parameters	159
• [0x1b] Parameters	167
• [0x1d] Parameters	180

Note: Not all parameters are included in each CONFIG file, as this depends on the board supported by that particular file. CONFIG file parameters that **should not be modified** by the user are omitted from this document. Exceptions are made for parameters that, although they should not be

modified by the user, are needed in understanding a particular set of parameters (for example, the [TSC] `defineBSet Width` parameter). For these exceptions, the parameter description states that the value should not be modified by the user.

6.1 [0x44] Parameters

Companding

Number: 0x4401

Description: The **Companding** parameter controls the encoding of audio for music played when placing a station on hold.

Note: This parameter only applies to DI Series Station Interface boards.

Values:

- 0 [default]: mu-law
- 1: A-law

Guidelines: The **Companding** parameter must be set to the same encoding method as set in the Encoding parameter 0x1209. For details about the Encoding parameter, refer to [Section 6.23, “\[TSC\] Parameters”](#), on page 158.

HDSI boards use country-specific PCD and FCD files. Depending on the PCD/FCD files selected for an HDSI board, the PCM encoding method will be set to either A-law or mu-law, based on the default value for that country. If this value is not the same as the TDM bus value, the HDSI board will fail to download.

To change the PCM encoding method for the HDSI board from the default value, you will need to edit the Companding parameter in the associated Config file, re-generate the FCD file, and then restart the system. For additional information about modifying FCD file parameters, see [Section 4.8, “Modifying FCD File Parameters”](#), on page 70.

6.2 [0x2b] Parameters

The [0x2b] section of the CONFIG file is used to enable streaming of echo cancellation data over the TDM bus in Continuous Speech Processing (CSP) applications. The [0x2b] section is only applicable in media load 2c CONFIG files and includes only the **EC Streaming to TDM Bus** parameter.

EC Streaming to TDM Bus

Number: 0x2b12

Description: The **EC Streaming to TDM Bus** parameter specifies whether to enable streaming of echo-cancellation data over the time division multiplexing (TDM) bus in Continuous Speech Processing (CSP) applications. This parameter is set on a per channel basis.

Values:

- 0x01: Enable
- 0x02 [default]: Disable

Guidelines: The **EC Streaming to TDM Bus** parameter is used with media load 2c CONFIG files only. For more information about media loads and board densities, see [Section 2.3](#), “Configuration File Sets”, on page 17.

6.3 [0x2c] Parameters

The [0x2c] section of the CONFIG file defines enhanced echo cancellation parameters used to set the tail length or tap length, or other Continuous Speech Processing (CSP) related parameters such as Silence Compressed Streaming (SCS). The [0x2c] section includes the following parameters:

- [EC Mode](#)
- [EC Tail Length](#)

EC Mode

Number: 0x2c1f

Description: The **EC Mode** parameter is used with the **EC Tail Length** parameter to define the echo cancellation tail length, or tap length, used in Continuous Speech Processing (CSP) applications. This parameter is set on a per board basis.

Values:

- 0x02 [default]: For tap length of 24, 32, or 64 ms

Guidelines: The **EC Mode** parameter is used with media loads that support Enhanced Echo Cancellation. For more information about media loads and board densities, see [Section 2.3](#), “Configuration File Sets”, on page 17.

When the **EC Tail Length** parameter is set to 0xC0 (24 ms), 0x100 (32 ms), or 0x200 (64 ms), set the **EC Mode** parameter to 0x02.

EC Tail Length

Number: 0x2c03

Description: The **EC Tail Length** parameter specifies the echo cancellation tail length, or tap length, used in Continuous Speech Processing (CSP) applications. This parameter is set on a per board basis and is used in conjunction with the **EC Mode** parameter.

Values:

- 0x80: 16 ms (default for DM/V-A boards)
- 0xC0: 24 ms
- 0x100: 32 ms
- 0x200: 64 ms (default for DM/V-B boards)

Guidelines: The **EC Tail Length** parameter is used with media load 2c CONFIG files only. For more information about media loads and board densities, see [Section 2.3, “Configuration File Sets”](#), on page 17.

SCS_PR_SP (SCS Speech Probability Threshold)

Number: 0x2c14

Description: The **SCS_PR_SP** parameter is used for silence compressed streaming (SCS) in continuous speech processing (CSP) applications. It sets the threshold that the calculated probability of speech value is compared to in declaring speech. If the probability of speech is greater than this parameter, speech is declared.

The **SCS_PR_SP** parameter primarily affects the sensitivity of detecting speech at the leading time of a speech period versus false speech detection. This parameter is defined as:

(Probability Value) * 223

Note: Multiplying by 223 converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

For example, for a speech probability threshold of 0.58, **SCS_PR_SP** would have a value of:

$0.58 * 223 = 4865393$

Values:

- 4194304 to 223 (0.50 to 1.00 probability)
- 6710886 [default]

Guidelines: This parameter is not included in the configuration file. If you want to modify the parameter value, you must add this parameter manually in the configuration file in the [0x2c] section.

SCS_PR_SIL (SCS Silence Probability Threshold)

Number: 0x2c15

Description: This parameter is used for silence compressed streaming (SCS) in continuous speech processing (CSP) applications. It sets the threshold that the calculated probability of

speech value is compared to in declaring silence. If the probability of speech is less than this parameter, silence is declared.

The **SCS_PR_SIL** parameter primarily affects the sensitivity of detecting silence at the trailing time of a speech period versus false silence detection. **SCS_PR_SIL** is defined as:

(Probability Value) * 223

Note: Multiplying by 223 converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

For example, for a silence probability threshold of 0.39, **SCS_PR_SIL** would have a value of:

$0.39 * 223 = 3271557$

Values:

- 0 to 4194304 (0.0 to 0.50 probability)
- 2097152 [default]

SCS_LO_THR (SCS Low Background Noise Threshold)

Number: 0x2c16

Description: The **SCS_LO_THR** parameter is used for silence compressed streaming (SCS) in continuous speech processing (CSP) applications. It controls the low threshold for background noise estimation, and along with the **SCS_HI_THR** parameter, forms a range of loudness. Any signal below this threshold is declared silence.

SCS_LO_THR is defined as:

$10(\text{dB value}/20) * 223$

Note: Multiplying by 223 converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

For example, for a low noise threshold of -78 dB, **SCS_LO_THR** would have a value of:

$10(-78/20) * 223 = 1057$

Values:

- 839 to 83887 (-80 dB to -40 dB)
- 11286 [default]

Guidelines: Increasing the low background noise threshold increases the probability of losing speech and decreases the probability of recording noise.

SCS_HI_THR (SCS High Background Noise Threshold)

Number: 0x2c17

Description: The **SCS_HI_THR** parameter is used for silence compressed streaming (SCS) in continuous speech processing (CSP) applications. It controls the high threshold for background

noise estimation and, along with **SCS_LO_THR** parameter, forms a range of loudness. Any signal above this threshold is declared speech.

SCS_HI_THR is defined as:

$$10(\text{dB value}/20) * 223$$

Note: Multiplying by 223 converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

For example, for a high noise threshold of -20 dB, **SCS_HI_THR** would have a value of:

$$10(-20/20) * 223 = 838861$$

Values:

- 83887 to 223+ (-40 dB to 0 dB)
- 838861 [default]

Guidelines: Reducing the high background noise threshold increases the probability of streaming noise and decreases the probability of losing speech.

SCS_T (SCS Trailing Silence)

Number: 0x2c24

Description: The **SCS_T** parameter is used for silence compressed streaming (SCS) in continuous speech processing (CSP) applications. It defines the duration of silence allowed after the end of a speech block before silence compression begins.

Values:

- 100 to 1000 milliseconds (Values must be entered in 10 millisecond increments. For example, 200, 210, 220 milliseconds)
- 200 milliseconds [default]

Guidelines: If this value is set too low, words and sentences will run together. If it is set too high, silence compression efficiency will be reduced, resulting in larger files.

SCS_Initial_data (SCS duration of initial stream data)

Number: 0x2c25

Description: The **SCS_Initial_data** parameter is used for silence compressed streaming (SCS) in continuous speech processing (CSP) applications. It controls the initial data to be streamed to the application regardless of the presence of silence or non-silence on the line. This initial data can be used by the application to qualify background noise and line conditions.

Values: 0 [default] to 2000 milliseconds (Values must be entered in 10 millisecond increments. For example, 200, 210, 220 milliseconds)

6.4 [encoder] Parameters

The [encoder] section of the CONFIG file includes the following parameters:

- PrmAGCk (AGC K Constant)
- PrmAGClow_threshold (AGC Noise Level Lower Threshold)
- PrmAGCmax_gain (AGC Maximum Gain)
- SCR_T (SCR Trailing Silence)
- SCR_PR_SP (SCR Speech Probability Threshold)
- SCR_PR_SIL (SCR Silence Probability Threshold)
- SCR_LO_THR (SCR Low Background Noise Threshold)
- SCR_HI_THR (SCR High Background Noise Threshold)

PrmAGCk (AGC K Constant)

Number: 0x401

Description: The **PrmAGCk** parameter is the target output level to the TDM bus divided by 32 (to limit K to the range 0 to -1). Note that K is the average level for the output.

PrmAGCk is defined as: $K * 2^{23}$

K is defined as $(10^{(\text{output level in dB}/20)})/32$. Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards. Therefore, $K = 0.006529$ corresponds to -13.6 dB average, since $0.006529 = (10^{(-13.6/20)})/32$. Note that -13.6 dB average would result in -6.6 dBm level of the analog output signal.

Values: 0x2061 to 0xD5F1 (-30.0 dB to -13.6 dB output levels)

Guidelines: It is recommended that the value be set in the range of -30.0 dB to -13.6 dB. Higher values (-50.0 dB for example) may result in strong peak to average compression if it is enabled or just severe clipping if peak to average compression is disabled.

Here is a sample calculation to obtain a hexadecimal value of **PrmAGCk** for an output level of -19.6 dB:

$$(10^{(-19.6/20)})/32 * 2^{23} = 0x006B39$$

PrmAGClow_threshold (AGC Noise Level Lower Threshold)

Number: 0x405

Description: The **PrmAGClow_threshold** parameter defines the lower threshold for noise level estimates. Any signal above this threshold will be considered speech. Thus, this threshold should

be set quite high in order to let the AGC algorithm determine when there are voiced and unvoiced periods. The parameter is given in terms of the average level.

PrmAGC_low_threshold is defined as: $10^{(\text{output level in dB})/20} * 2^{23}$. Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

Note: The AGC high threshold is determined by the ratio of the **PrmAGC_k** value over the **PrmAGC_max_gain** value.

Values: 0x20C5 to 0x3000 (-60 dB to -25 dB)

Guidelines: It is recommended that the value be set in the range of -60 dB to -40 dB.

Here is a sample calculation to get a hexadecimal value of **PrmAGC_low_threshold** for a noise threshold level of -50 dB_{avg}:

$$10^{(-50/20)} * 2^{23} = 0x679F$$

PrmAGC_max_gain (AGC Maximum Gain)

Number: 0x408

Description: The **PrmAGC_max_gain** parameter defines the maximum gain divided by 32. This parameter controls the maximum possible gain applied by the AGC algorithm. It also implies the High Threshold Level above which all the inputs produce the target output levels and below which produce the levels linearly decreasing with their input level.

PrmAGC_max_gain is defined as: $((10^{((\text{maximum gain in dB})/20)})/32) * 2^{23}$. Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

Values: 0x040000 to 0x7E7DB9 (0 dB to 30 dB)

Guidelines: It is recommended that the value be set in the range of 0 dB to 30 dB.

Here is a sample calculation to obtain a hexadecimal value of **PrmAGC_max_gain** for a maximum gain of 21 dB:

$$((10^{(21/20)})/32) * 2^{23}$$

SCR_T (SCR Trailing Silence)

Number: 0x415

Description: The **SCR_T** parameter is used for Silence Compressed Recording and defines the duration of silence allowed following speech before SCR begins (trailing silence).

Values: 100 to 1000 (milliseconds)

Guidelines: If it is set too low, words and sentences will run together; if it is set too high, SCR efficiency will be reduced, resulting in larger files.

SCR_PR_SP (SCR Speech Probability Threshold)

Number: 0x417

Description: The **SCR_PR_SP** parameter is used for Silence Compressed Recording and sets the threshold that the calculated probability of speech value is compared to in declaring speech. If the probability of speech is greater than this parameter, speech is declared.

The **SCR_PR_SP** parameter primarily affects the sensitivity of detecting speech at the leading time of a speech period versus false speech detection.

SCR_PR_SP is defined as: (Probability Value) * 2^{23} . Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

Values: 4194304 to 2^{23} (0.50 to 1.00 probability)

Guidelines: For example, for a speech probability threshold of 0.58, **SCR_PR_SP** would have a value of:

$$0.58 * 2^{23} = 4865392$$

SCR_PR_SIL (SCR Silence Probability Threshold)

Number: 0x418

Description: The **SCR_PR_SIL** parameter is used for Silence Compressed Recording and sets the threshold that the calculated probability of speech value is compared to in declaring silence. If the probability of speech is less than this parameter, silence is declared.

The **SCR_PR_SIL** parameter primarily affects the sensitivity of detecting silence at the trailing time of a speech period versus false silence detection.

SCR_PR_SIL is defined as: (Probability Value) * 2^{23} . Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

Values: 0 to 4194304 (0.0 to 0.50 probability)

Guidelines: For example, for a silence probability threshold of 0.39, **SCR_PR_SIL** would have a value of:

$$0.39 * 2^{23} = 3271557$$

SCR_LO_THR (SCR Low Background Noise Threshold)

Number: 0x419

Description: The **SCR_LO_THR** parameter is used for Silence Compressed Recording and controls the low threshold for background noise estimation and, along with **SCR_HI_THR** parameter, forms a range of loudness. Any signal below this threshold is declared silence. Increasing this threshold increases the probability of losing speech and decreases the probability of recording noise.

SCR_LO_THR is defined as: $10(\text{dB value}/20) * 2^{23}$. Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

Values: 839 to 83887 (-80 dB to -40 dB)

Guidelines: For example, for a low noise threshold of -78 dB, **SCR_LO_THR** would have a value of:

$$10^{(-78/20)} * 2^{23} = 1056$$

SCR_HI_THR (SCR High Background Noise Threshold)

Number: 0x41A

Description: The **SCR_HI_THR** parameter is used for Silence Compressed Recording and controls the high threshold for background noise estimation and, along with **SCR_LO_THR** parameter, forms a range of loudness. Any signal above this threshold is declared speech. Reducing this threshold increases the probability of recording noise and decreases the probability of losing speech.

SCR_HI_THR is defined as: $10^{(\text{dB value}/20)} * 2^{23}$. Multiplying by 2^{23} converts the value into a linear 24-bit value that accommodates the 24-bit DSPs used on DM3 boards.

Values: 83887 to $2^{23} + (-40 \text{ dB to } 0 \text{ dB})$

Guidelines: For example, for a high noise threshold of -20 dB, **SCR_HI_THR** would have a value of:

$$10^{(-20/20)} * 2^{23} = 838860$$

6.5 [recorder] Parameters

The [recorder] section of the CONFIG file includes the following parameters:

- [Duration \(Record Duration\)](#)
- [BufferTruncate \(Buffer Truncate\)](#)
- [BeepSignalID \(Pre-Recording Beep\)](#)
- [AGCOnOff \(AGC Flag\)](#)
- [SCR \(SCR Flag\)](#)

Duration (Record Duration)

Number: 0x200

Description: The **Duration** parameter specifies the maximum duration (in milliseconds) for which to record. The maximum duration time is 72 hours (259,200,000 ms).

Values: 0 to 259,200,000 (milliseconds)

Guidelines: The time specified must be divisible by 4.

BufferTruncate (Buffer Truncate)

Number: 0x202

Description: The **BufferTruncate** parameter specifies the amount of data (in milliseconds) to truncate from the record buffer at the end of a recording.

Values: 0 to 4000 (milliseconds)

Guidelines: The suggested range is about 50 to 150 ms (varies with coder).

BeepSignalID (Pre-Recording Beep)

Number: 0x203

Description: The **BeepSignalID** parameter is the signal identifier of the beep tone preceding the recording.

Values:

- 0x21: 444 Hz tone for 400 ms
- 0x22: 1000 Hz tone for 400 ms

AGCOnOff (AGC Flag)

Number: 0x205

Description: The **AGCOnOff** parameter enables or disables Automatic Gain Control (AGC) on a per board basis. These settings can be changed for individual channels using API calls.

Values:

- 0: Disable AGC
- 1: Enable AGC

SCR (SCR Flag)

Number: 0x209

Description: The **SCR** parameter enables or disables Silence Compressed Recording (SCR) on a per board basis. These settings can be changed for individual channels using API calls.

Values:

- 9: Enable SCR
- 10: Disable SCR

6.6 [0x39] Parameters

The [0x39] section of the CONFIG file includes a single parameter.

ToneClamping (Tone Clamping)

Number: 0x3925

Description: The **ToneClamping** parameter is used to disable conference tone clamping. Tone clamping reduces the amount of DTMF tones heard in a conference.

Note: To also disable the conference notification tone on Dialogic Integrated Series boards (or any Intel® Dialogic® Voice board), modifications to the **NotificationTone** parameter are also required. For details, see “[NotificationTone \(Conferencing Notification Tone\)](#)”, on page 103.

Values: 0

Guidelines: Tone clamping is enabled by default on Dialogic Integrated Series boards. To disable tone clamping, the **ToneClamping** parameter must be added to the [0x39] section of the CONFIG file (using the `SetParm` format) and set to a value of 0. To re-enable tone clamping, the **ToneClamping** parameter must be removed from the [0x39] section of the CONFIG file.

6.7 [0x3b] Parameters

The [0x3b] section of the CONFIG file includes a single parameter.

ActiveTalkerNotifyInterval (Active Talker Notification Interval)

Number: 0x3b02

Description: The **ActiveTalkerNotifyInterval** parameter is the periodic duration at which a message listing the active talkers in a conference is sent to the host.

Values represent 10 millisecond units. For example, to send a notification message once per second, the **ActiveTalkerNotifyInterval** parameter should be set to a value of 100 (1 second = 1000 ms / 10 = 100).

Values: 0 to 1000 (10 ms units)

Guidelines: A low value can affect system performance due to excessive usage. A high value can affect the quality of the reporting. For example, setting the value to 20 will result in good quality active talker notification whenever any party says a “yes” or “no”. Setting the parameter to 100 will result in such events not being reported.

6.8 [0x3b.x] Parameters

The [0x3b.x] section of the CONFIG file includes a single parameter.

NotificationTone (Conferencing Notification Tone)

Number: 0x3b06

Description: The **NotificationTone** parameter is used to disable the conferencing notification tone on DM/V-A, DM/V-B, and Dialogic Integrated (DI) Series boards. The conferencing notification tone is generated to alert conferees when a party enters or exits a conference.

Note: To also disable tone clamping on Dialogic Integrated Series boards, modifications to the **ToneClamping** parameter are required. For details, see “[ToneClamping \(Tone Clamping\)](#)”, on page 102.

Values: 0

Guidelines: This tone is enabled by default and the **NotificationTone** parameter must be added to the CONFIG file to disable the tone. To re-enable the tone, the **NotificationTone** parameter must be removed from the [0x3b.x] sections of the CONFIG file.

To disable the conferencing notification tone, the **NotificationTone** parameter must be added to the [0x3b.x] sections of the CONFIG file and set to a value of 0. Each [0x3b.x] section applies to a specific conferencing line. That is, [0x3b.1] applies to conferencing line 1, [0x3b.2] applies to conferencing line 2, and so on.

For DM/V-A and DM/V-B boards, there are 30 conferencing lines, and therefore, 30 [0x3b.x] sections in the CONFIG file: [0x3b.1] through [0x3b.30].

For the DI/0408-LS-A Dialogic Integrated Series board, there are three conferencing lines, and therefore, three [0x3b.x] sections in the CONFIG file: [0x3b.1] through [0x3b.3].

For the DI/SI-16, DI/SI-24, and DI/SI-32 Dialogic Integrated Series boards, there are five conferencing lines, and therefore, five [0x3b.x] sections in the CONFIG file: [0x3b.1] through [0x3b.5].

6.9 [lineAdmin.x] Parameters (Digital Voice)

For digital voice boards, the line administration parameters are associated with an individual T1 or E1 trunk. The parameters defined in the [lineAdmin.x] section are associated with line x. For example, parameters in the [lineAdmin.3] section of the CONFIG file are associated with line 3. Digital voice line administration parameters include:

- [LineType \(Line Type\)](#)
- [SignalingType \(Signaling Type\)](#)
- [Coding \(Coding\)](#)
- [ZeroCodeSuppression \(Zero Code Suppression\)](#)
- [FramingAlgorithm \(CRC Checking\)](#)
- [LOSDeclaredTime \(LOS Declared Time\)](#)
- [LOSClearedTime \(LOS Cleared Time\)](#)
- [REDCFADecay \(RED CFA Decay\)](#)
- [REDCFADeclareTime \(RED CFA Declare Time\)](#)
- [REDCFAClearedTime \(RED CFA Cleared Time\)](#)

- [YellowCFADeclareTime](#) (Yellow CFA Declare Time)
- [YellowCFAClearTime](#) (Yellow CFA Clear Time)
- [RAICRCCFADeclareTime](#) (RAI CRC CFA Declare Time)
- [RAICRCCFAClearTime](#) (RAI CRC CFA Clear Time)

LineType (Line Type)

Number: 0x1601

Description: The **LineType** parameter defines the physical line type (T1 or E1) and the framing format (for example, D4 or ESF). Framing formats include:

D4 framing (D4)

For T1 lines, in D4 framing, 12 frames of 193 bits each (2,316 bits total) constitute a superframe. This framing format supports AB signaling.

Extended superframe (ESF)

For T1 lines, in ESF framing, 24 frames of 193 bits each (4,632 bits total) constitute an extended superframe. This framing format supports ABCD signaling.

CEPT E1

For E1 lines, uses CEPT E1 framing.

Cyclic redundancy check 4 (CRC-4) multi-frame

For E1 lines, this provides for CRC error detection. In this framing format, E1 lines have an extra framing that can coexist with the standard framing and the time slot 16 signaling framing. This extra framing is used to compute and check CRC-4 on incoming lines, to detect remote CRC-4 alarms, and to notify the remote line of CRC-4 errors. When CRC-4 framing is enabled, all CRC-related statistics will be collected and reported, and the RAI_CRC_CFA alarm will be detected and reported.

Analog

Analog is the framing used for Dialogic Integrated Series boards.

Values:

- 0: T1 D4 (dsx1_D4)
- 1: T1 ESF (dsx1_ESF)
- 2: E1 CEPT E1 (dsx1_E1)
- 3: E1 CRC 4 multi-frame (dsx1_E1_CRC)
- 4: analog

SignalingType (Signaling Type)

Number: 0x1602

Description: The **SignalingType** parameter defines the signaling type to be used by the T1 or E1 line. Signaling types include:

Channel associated signaling (CAS)

In CAS, the signaling for each channel is directly associated with that channel. T1 robbed-bit signaling is an example of CAS.

Common channel signaling (CCS)

In CCS, a common channel carries the signaling for all of the channels on that T1 or E1 line. ISDN is an example of CCS, where the D channel is used to carry the signaling for all of the B channels.

Clear channel signaling (Clear)

In this type, none of the channels on the T1 or E1 line are used for signaling purposes. Clear channel signaling is the ability to access telephony channels in the system and configure them to a user defined call control protocol, or to simply leave the lines 'clear'. The resources should have access to the telephony bus for media routing purposes, as well as signal detection, signal generation, and tone generation capabilities, if desired.

Note: In a clear channel configuration, the CT Bus does not preserve frames, so any in-band signaling is lost. That is, T1 CAS robbed bit signaling cannot be performed on a line configured to use clear channel signaling.

Values:

- 4: CAS
- 5: CCS
- 6: Clear

Guidelines: When using Non-Facility-Associated Signaling (NFAS), Signaling Type is dependent on whether the T1 or E1 line is a primary, standby (DCBU), or NFAS ISDN trunk. The primary trunk must be set to CCS and the standby and NFAS trunks must be set to Clear.

Note: NFAS is supported on only the ISDN NI-2, 4ESS, 5ESS and DMS protocols, and NFAS D channel backup (DCBU) is supported only on ISDN NI-2 protocol.

For additional parameters that need to be modified for NFAS, see [Section 6.11, "\[NFAS\] Parameters"](#), on page 110

Coding (Coding)

Number: 0x1603

Description: The **Coding** parameter defines the coding scheme to be used by a digital line type. Coding schemes include:

Modified alternate mark inversion (B8ZS)

This is a modified AMI code that only applies to T1 lines and is used to preserve one's density on the line. Whenever eight consecutive zeros occur on the line, they are replaced by an 8-bit string that violates the bipolar signaling. If the preceding pulse was positive, the polarity of the substituted eight bits is 000+-0-+. If the preceding pulse was negative, the polarity of the substituted eight bits is 000-+0+-.

Alternate mark inversion (AMI)

This is a bipolar signal conveying binary digits in which each successive 1 (mark) is of the opposite polarity. If the previous mark was a positive pulse, then the next mark will be a negative pulse. Spaces have an amplitude of zero (no pulse).

High density bipolar three zero (HDB3)

High density bipolar three zero is a modified AMI code that only applies to E1 and is used to preserve one's density on the line. Whenever four consecutive zeros appear, the four-zeros group is replaced with an HDB3 code. This could be either of two HDB3 codes, depending on

whether there was an odd or even number of ones since the last bipolar violation. If an odd number of ones occurred, the substituted four bits are 000V, where V represents a bipolar violation. If an even number of ones occurred, the substituted four bits are P00V, where P represents a parity bit and V represents a bipolar violation.

Values:

- 7: B8ZS
- 8: AMI
- 9: HDB3

ZeroCodeSuppression (Zero Code Suppression)

Number: 0x1604

Description: The **ZeroCodeSuppression** parameter is an algorithm used by T1 lines that inserts a 1 bit into a stream to prevent the transmission of eight or more consecutive 0 bits, which could produce timing errors. Instead, this algorithm maintains a minimum one's density to reduce timing errors.

Values:

- 10: Bell - Bell zero code suppression (Jam Bit 7)
- 11: GTE - GTE zero code suppression (Jam Bit 8, except in signaling frames when Jam Bit 7 is used if the signaling bit is 0)
- 12: DDS - Digital Data Service zero code suppression (data byte is replaced with 10011000)
- 13: None - No zero code suppression is used.

Guidelines: The **ZeroCodeSuppression** parameter is used when AMI line-coding is used, that is, when the **Coding** parameter is set to AMI. Since AMI does not perform zero code suppression, the **ZeroCodeSuppression** parameter ensures there are no long strings of consecutive zeros on the line.

If the **Coding** parameter is set to B8ZS or HDB3 (for E1), then zero code suppression is performed by the line-coding and the **ZeroCodeSuppression** parameter is ignored.

FramingAlgorithm (CRC Checking)

Number: 0x1624

Description: A T-1 front end can run two different framing algorithms when configured as extended superframe (ESF): a default algorithm and an alternate CRC-6 checking algorithm. The CRC-6 checking algorithm allows the circuit to confirm the CRC-6 bits in the received multiframe, as a guard against mimic framing patterns, before forcing a new frame alignment. The CRC Checking parameter allows you to enable the CRC-6 checking algorithm.

Values:

- 0: Default algorithm
- 1: Alternate CRC-6 checking algorithm

Guidelines: This parameter only applies to T-1 trunks whose Line Type parameter (0x1601) is set to 1 (dsx1_ESF). For all other Line Types, this parameter is invalid.

LOSDeclaredTime (LOS Declared Time)

Number: 0x160c

Description: The **LOSDeclaredTime** parameter defines the number of milliseconds for which no signal is detected at the input port before a loss of signal (LOS) or carrier-failure alarm (CFA) can be declared.

Values: 0 to 2500 (milliseconds)

LOSClearedTime (LOS Cleared Time)

Number: 0x160d

Description: The **LOSClearedTime** parameter defines the number of milliseconds for which a signal must be detected at the input port before a declared LOS or CFA can be cleared.

Values: 0 to 2500 (milliseconds)

REDCFADecay (RED CFA Decay)

Number: 0x1609

Description: The **REDCFADecay** parameter is the denominator of the fraction used to calculate the decay slope in the integration process when RED CFA condition has not been declared and LOS or LOF is intermittent.

Values: 4 to 15 (1/4 to 1/15)

REDCFADeclareTime (RED CFA Declare Time)

Number: 0x160a

Description: The **REDCFADeclareTime** parameter defines the number of milliseconds that a red alarm condition must be received at the input port before a RED CFA condition can be declared.

Values: 0 to 2500 (milliseconds)

REDCFAClearedTime (RED CFA Cleared Time)

Number: 0x160b

Description: The **REDCFAClearedTime** parameter defines the number of milliseconds that a normal signal must be received at the input port before a declared RED CFA condition can be cleared.

Values: 1000 to 15000 (milliseconds)

YellowCFADeclareTime (Yellow CFA Declare Time)

Number: 0x160e

Description: The **YellowCFADeclareTime** parameter defines the number of milliseconds for which a Remote Alarm Indication (RAI) signal is detected at the input port before a yellow CFA condition can be declared.

Values: 0 to 2500 (milliseconds)

YellowCFAClearTime (Yellow CFA Clear Time)

Number: 0x160f

Description: The **YellowCFAClearTime** parameter defines the number of milliseconds for which a RAI signal is not detected at the input port before a declared yellow CFA condition can be cleared.

Values: 0 to 2500 (milliseconds)

RAICRCCFADeclareTime (RAI CRC CFA Declare Time)

Number: 0x1610

Description: The **RAICRCCFADeclareTime** parameter defines the number of seconds for which a RAI signal and CRC Error is detected at the input port before a RAI CRC CFA can be declared.

Values: 0 to 450 (milliseconds)

RAICRCCFAClearTime (RAI CRC CFA Clear Time)

Number: 0x1611

Description: The **RAICRCCFAClearTime** parameter defines the number of seconds for which a RAI signal and Remote CRC Error is not detected at the input port before a declared RAI CRC CFA can be cleared.

Values: 0 to 450 (milliseconds)

InitialBitPattern (Initial CAS Signaling Bit Pattern)

Number: 0x1625

Description: The **InitialBitPattern** parameter defines the values of the CAS ABCD signaling bits that are transmitted for all channels on the specified line at the time the firmware is downloaded and initialized.

Values: 0x0 to 0xf, where the hexadecimal value represents the binary ABCD bit values. For example, 0xd defines the ABCD bit pattern as 1101.

Guidelines: For a T1 line, the default is 0x0. For an E1 line, the default is 0xd.

6.10 [LineAdmin.x] Parameters (Analog Voice)

For DM3 analog voice boards, the line administration parameters consist of a collection of audio filter coefficients.

Audio Filter Coefficients

Number: 0x1630 - 0x1638

Description: The **Audio Filter Coefficients** parameter defines the filter coefficients programmed into the Quad Subscriber Line Audio-Processing Circuit (QSLAC) device on the board. These filters optimize the analog circuitry to match specific loading impedances, receive and transmit gain, and provide equalization of the transmit and receive paths of the loop start trunks on a DM3 analog voice board.

The filters are grouped by termination impedances - either 600 ohms or a predetermined Complex impedance. The filter coefficients are further grouped in each [LineAdmin.x] section as being associated with a group of four analog loop start trunks. For example, parameters included in the [LineAdmin.3] section of the CONFIG file are associated with trunks 9 through 12. All of the parameters defined in a [LineAdmin.x] section must be defined for only one impedance value (for example, 600 ohm or Complex). The filter coefficient parameters in a particular [LineAdmin.x] section must not be altered or individually defined.

For example, to define the termination impedance as Complex for ports 1 through 4 on a DMV160LP board, you must first comment out all of the lines in the [LineAdmin.1] section for 600 ohms in the CONFIG file by inserting an exclamation symbol (!) at the beginning of the [LineAdmin.1] line and at the beginning of each SetVParam line as shown in the following:

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!   QSLAC Coefficients Line Admin 1 for loop start trunk interfaces 1-4,
!   US Coefficients for input impedance of; 600 ohms
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

! [LineAdmin.1] ! ComponentName=LineAdmin Std_ComponentType=0x16

!SetVParam(0x1630,0x200800) = 0xAB, 0x60 ! DMV160-LP LSI US-600ohm QSLAC GX Filter

!SetVParam(0x1631,0x200802) = 0x4A, 0xE0 ! DMV160-LP LSI US-600ohm QSLAC GR Filter

!SetVParam(0x1632,0x207004) = 0x23, 0x25, 0x42, 0x9F, 0x42, 0xAD, 0x3A, 0xAE, 0x72, 0xD6, 0xAC,
0xF2, 0xB6, 0x6E, 0x01 ! DMV160-LP LSI US-600ohm QSLAC Z Filter

!SetVParam(0x1633,0x206813) = 0xF8, 0xFB, 0x87, 0xD8, 0xFC, 0x87, 0xA8, 0x7A, 0x87, 0xA8, 0x7A,
0x87, 0xA8, 0x70 ! DMV160-LP LSI US-600ohm QSLAC B1 Filter

!SetVParam(0x1634,0x200821) = 0xA5, 0xD0 ! DMV160-LP LSI US-600ohm QSLAC B2 Filter

!SetVParam(0x1635,0x205823) = 0x01, 0x11, 0x01, 0x90, 0x01, 0x90, 0x01, 0x90, 0x01, 0x90, 0x01,
0x90 ! DMV160-LP LSI US-600ohm QSLAC X Filter

!SetVParam(0x1636,0x20682F) = 0xDC, 0x01, 0xA2, 0x60, 0x2C, 0xCD, 0x2A, 0x97, 0x23, 0x26, 0xBB,
0x2E, 0x23, 0xC7 ! DMV160-LP LSI US-600ohm QSLAC R Filter

!SetVParam(0x1637,0x20003D) = 0x80 ! DMV160-LP LSI US-600ohm QSLAC AISN
```

```
!SetVParam(0x1638,0x20003E) = 0x7F ! DMV160-LP LSI US-600ohm QSLAC OperFunc
```

and then uncomment all of the lines in the [LineAdmin.1] section for Complex impedance by deleting the exclamation symbol (!) from the beginning of the [LineAdmin.1] line and the beginning of each SetVParam line as shown in the following:

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
! QSLAC Coefficients Line Admin 1 for loop start trunk interfaces 1-4,
! US Coefficients for recommended compromise complex impedance,
! 300 ohms + [1K ohms // 220 nF], ref: EIA/TIA 464B
! Select when line conditions are as follow: non-conditioned lines, long distance from CO
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

[LineAdmin.1] ! ComponentName=LineAdmin Std_ComponentType=0x16

SetVParam(0x1630,0x200800) = 0x23, 0x60 ! DMV160-LP LSI US-complex QSLAC GX Filter

SetVParam(0x1631,0x200802) = 0x3B, 0xE0 ! DMV160-LP LSI US-complex QSLAC GR Filter

SetVParam(0x1632,0x207004) = 0xB3, 0xAB, 0x2D, 0xB9, 0xAA, 0x3B, 0xA3, 0xB3, 0xC3, 0x3B, 0x37,
0xCA, 0xB5, 0x6E, 0x01 ! DMV160-LP LSI US-complex QSLAC Z Filter

SetVParam(0x1633,0x206813) = 0xA8, 0x7B, 0xA5, 0xB2, 0xD3, 0xCB, 0x2A, 0xBA, 0xAC, 0x45, 0xD2,
0xAD, 0x3E, 0xE0 ! DMV160-LP LSI US-complex QSLAC B1 Filter

SetVParam(0x1634,0x200821) = 0xAA, 0x31 ! DMV160-LP LSI US-complex QSLAC B2 Filter

SetVParam(0x1635,0x205823) = 0xAB, 0xA0, 0x2B, 0x33, 0x2D, 0xA3, 0x2A, 0x24, 0xAA, 0x2D, 0xA2,
0x25 ! DMV160-LP LSI US-complex QSLAC X Filter

SetVParam(0x1636,0x20682F) = 0xB3, 0xD0, 0xDA, 0x10, 0x2D, 0xA9, 0xAC, 0x5B, 0xFA, 0xAE, 0x72,
0x2C, 0xAA, 0x3E ! DMV160-LP LSI US-complex QSLAC R Filter

SetVParam(0x1637,0x20003D) = 0x80 ! DMV160-LP LSI US-complex QSLAC AISN

SetVParam(0x1638,0x20003E) = 0x7F ! DMV160-LP LSI US-complex QSLAC OperFunc
```

Values:

- 600: 600 ohms
- Complex: Complex

Guidelines: Select 600 ohms to match a 600 ohm impedance and select Complex to match a complex impedance.

6.11 [NFAS] Parameters

Non-Facility-Associated Signaling (NFAS) uses a single ISDN PRI D channel to provide signaling and control for multiple ISDN PRI lines. When using NFAS, modifications also need to be made to other sections of the CONFIG file. For details, see the following:

- [“SignalingType \(Signaling Type\)”](#), on page 104.
- [Section 6.12, “\[NFAS.x\] Parameters”](#), on page 111.

There is only one NFAS component level parameter.

NFAS_INSTANCE_MAP (NFAS Instance Map)

Number: 0x3E02

Description: The **NFAS_INSTANCE_MAP** parameter defines the number of NFAS groups or NFAS instances created on a particular board. One NFAS group is created for each primary D channel on the board.

Values:

- 0x0: 0 (0000)
- 0x1: 1 (0001)
- 0x3: 2 (0011)
- 0x7: 3 (0111)
- 0xF: 4 (1111)

Guidelines: The **NFAS_INSTANCE_MAP** parameter value is a hexadecimal bitmap that represents the number of NFAS groups that are needed. The bitmap's least significant bit correlates to the first NFAS instance, the next least significant bit corresponds to the second NFAS instance, and so on. So, starting with the least significant bit and working towards the most significant bit, set each bit's value to 1 for each NFAS instance needed. For example, to create three NFAS groups, set the value of the **NFAS_INSTANCE_MAP** parameter to 0x07 (0111).

6.12 [NFAS.x] Parameters

Non-Facility-Associated Signaling (NFAS) uses a single ISDN PRI D channel to provide signaling and control for multiple ISDN PRI lines. For each group defined by the **NFAS_INSTANCE_MAP** parameter, there will be an [NFAS.x] section in the CONFIG file. For example, [NFAS.1] corresponds to the NFAS instance for the first group, [NFAS.2] corresponds to the NFAS instance for the second group, and so on.

When using NFAS, modifications also need to be made to other sections of the CONFIG file. For details, see the following parameters:

- “[NFAS_INSTANCE_MAP \(NFAS Instance Map\)](#)”, on page 111.
- “[SignalingType \(Signaling Type\)](#)”, on page 104

NFAS instance level parameters include:

- [GroupID \(Group Identifier\)](#)
- [NFAS_PrimaryIntID \(Primary Instance Identifier\)](#)
- [NFAS_Standby_IntID \(Standby Instance Identifier\)](#)

GroupID (Group Identifier)

Number: 0x3E00

Description: The **GroupID** parameter is defined for each NFAS group created. This parameter defines the NFAS group including the trunks that are assigned to it.

Values: 1 to 4

Guidelines: When setting this parameter, the trunks assigned to the group must also be defined. For each group, multiple trunks are identified and added in recurring sets of triplets, using the following command:

```
AddNFASInterface(x)= a,b,c, a',b',c', ...
```

Where:

x = GroupID

NFAS group into which the interface needs to be added. For [NFAS.x], this would be “x”.

a = InterfaceID

Unique number for this interface assigned by the user. A maximum of 10 interfaces can be assigned to a single group.

b = BoardNumber

Logical board number (as defined by the **Logical ID** parameter) on which the trunk being assigned to the InterfaceID resides.

c = InstanceNumber

Instance number of the trunk that is being assigned to the InterfaceID. Trunks are numbered sequentially based on their physical location on the boards, from top to bottom.

For example, to add all four trunks on board 2 and the first two trunks on board 3 to the fourth NFAS group, enter the following to the [NFAS.4] section in the CONFIG file:

```
[NFAS.4]
AddNFASInterface(4)=0,2,1, 1,2,2, 2,2,3, 3,2,4, 4,3,1, 5,3,2
SetParm=0x3E04,0
```

NFAS_PrimaryIntID (Primary Instance Identifier)

Number: 0x3E04

Description: The **NFAS_PrimaryIntID** parameter defines the primary D channel used by the NFAS group and is set for every [NFAS.x] group that is created.

Values: 0 to 9 (valid **InterfaceID** value)

Guidelines: The parameter is set to one of the [NFAS.x] InterfaceIDs defined by the **GroupID** parameter's AddNFASInterface command. For details, see “[GroupID \(Group Identifier\)](#)”, on page 112.

For example, to define the primary D channel for NFAS group 4 to be the second trunk on board 3, enter the following to the [NFAS.4] section in the CONFIG file:

```
[NFAS.4]
AddNFASInterface(4)=0,2,1, 1,2,2, 2,2,3, 3,2,4, 4,3,1, 5,3,2
SetParm=0x3E04,5
```

NFAS_Standby_IntID (Standby Instance Identifier)

Number: 0x3E05

Description: The **NFAS_Standby_IntID** parameter defines the standby, or backup, D channel used by the NFAS group. This parameter is set for every [NFAS.x] group that implements D channel backup (DCBU).

Note: DCBU is supported on only DM/V, DM/N, DM/T, and DMN160TEC boards using ISDN NI-2.

Values: 0 to 9 (valid **InterfaceID** value)

Guidelines: The parameter is set to one of the [NFAS.x] InterfaceIDs defined by the **GroupID** parameter's **AddNFASInterface** command. For details about the **AddNFASInterface** command, see “[GroupID \(Group Identifier\)](#)”, on page 112.

In the example:

```
[NFAS.4]
AddNFASInterface(4)=0,2,1, 1,2,2, 2,2,3, 3,2,4, 4,3,1, 5,3,2
SetParm=0x3e04,5
```

to define the first trunk on board 2 the standby D channel for the fourth NFAS group, add parameter 0x3e05 to the [NFAS.4] section of the CONFIG file and set it to a value of 0:

```
[NFAS.4]
AddNFASInterface(4)=0,2,1, 1,2,2, 2,2,3, 3,2,4, 4,3,1, 5,3,2
SetParm=0x3e04,5
SetParm=0x3e05,0
```

6.13 [CAS] Parameters for T1 E&M Signals

The basis for the T1 E&M wink protocol is Channel Associated Signaling (CAS). The CAS component is responsible for the generation and detection of CAS signals on the phone network interface. The CAS T-1 E&M wink signals are defined in this section of the CONFIG file and assigned as variants in the [CHP] T-1 Protocol Variant Definition section of the CONFIG file. For details, see [Section 6.20, “\[CHP\] T1 Protocol Variant Definitions”](#), on page 134.

Note: The CAS signaling parameters should only be modified by experienced users if the default settings do not match what the line carrier or PBX is sending or expecting for the line protocol configuration running on the card.

CAS T1 E&M wink parameters include:

- [Offhook \(E&M Off-hook Signal\)](#)
- [Onhook \(E&M On-hook Signal\)](#)
- [FlashOnhook \(E&M Flash On-hook Signal\)](#)
- [Wink \(E&M Wink Signal\)](#)
- [Flash \(E&M Flash Signal\)](#)

Offhook (E&M Off-hook Signal)

Number: 0xC15CA001

Description: The **Offhook** parameter defines the transition signal from an on-hook state to an off-hook state. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF0 (11110000)
- PostVal: 0xFF (11111111)
- PreTm: 100 ms
- PostTm: 300 ms

Onhook (E&M On-hook Signal)

Number: 0xC15CA002

Description: The **Onhook** parameter defines the transition signal from an off-hook state to an on-hook state. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xFF (11111111)
- PostVal: 0xF0 (11110000)
- PreTm: 300 ms
- PostTm: 100 ms

FlashOnhook (E&M Flash On-hook Signal)

Number: 0xC15CA003

Description: The **FlashOnhook** parameter defines the transition signal from an off-hook state to a flash on-hook state during a blind transfer. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xFF (11111111)
- PostVal: 0xF0 (11110000)
- PreTm: 300 ms
- PostTm: 1000 ms

Wink (E&M Wink Signal)

Number: 0xC15CA011

Description: The **Wink** parameter defines a pulse signal for the purposes of protocol handshaking and is typically used as an acknowledgment signal to the line carrier or PBX. It is most often used to acknowledge signaling bit changes detected from the carrier or to signal the start or end of digit collection. The signal transitions from OffVal to OnVal and back to OffVal. For

detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

Values:

- OffVal: 0xF0 (11110000)
- OnVal: 0xFF (11111111)
- PreTm: 100 ms
- MinTm: 210 ms
- NomTm: 250 ms
- MaxTm: 280 ms
- PostTm: 100 ms

Flash (E&M Flash Signal)

Number: 0xC15CA012

Description: The **Flash** parameter defines a pulse signal for the purposes of requesting special processing. This signal is typically sent to transfer a call to another phone or channel while the call is connected and in progress. The signal goes from OffVal to OnVal and back to OffVal. For detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

Values:

- OffVal: 0xFF (11111111)
- OnVal: 0xF0 (11110000)
- PreTm: 100 ms
- MinTm: 210 ms
- NomTm: 250 ms
- MaxTm: 280 ms
- PostTm: 100 ms

6.14 [CAS] Parameters for T1 Loop Start Signals

The basis for the T1 loop start protocol is Channel Associated Signaling (CAS). The CAS component is responsible for the generation and detection of CAS signals on the phone network interface. The CAS T-1 loop start signals are defined in this section of the CONFIG file and assigned as variants in the [CHP] T-1 Protocol Variant Definition section of the CONFIG file. For details, see [Section 6.20, “\[CHP\] T1 Protocol Variant Definitions”](#), on page 134.

Note: The CAS signaling parameters should only be modified by experienced users if the default settings do not match what the line carrier or PBX is sending or expecting for the line protocol configuration running on the card.

CAS T1 loop start parameters include:

- [PBX_Open](#) (Loop Start PBX Open Signal)
- [PBX_Close](#) (Loop Start PBX Close Signal)

- [Net_Answer](#) (Loop Start Net Answer Signal)
- [Net_Drop](#) (Loop Start Net Drop Signal)
- [Net_Abandon](#) (Loop Start Net Abandon Signal)
- [Net_RingOn](#) (Loop Start Net Ring On Signal)
- [Net_RingOff](#) (Loop Start Net Ring Off Signal)
- [PBX_FlashOpen](#) (Loop Start PBX Flash Open Signal)
- [Net_FlashDrop](#) (Loop Start Net Flash Drop Signal)
- [PBX_Flash](#) (Loop Start PBX Flash Signal)
- [Loop Start Train Definition](#)
- [Loop Start Sequence Definition](#)

[PBX_Open \(Loop Start PBX Open Signal\)](#)

Number: 0xC15CA021

Description: The **PBX_Open** parameter defines the transition signal sent to drop a call. In an analog environment, the station goes from off-hook to on-hook. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xFF (11111111)
- PostVal: 0xF5 (11110101)
- PreTm: 100 ms
- PostTm: 100 ms

[PBX_Close \(Loop Start PBX Close Signal\)](#)

Number: 0xC15CA022

Description: The **PBX_Close** parameter defines the transition signal sent to make an outbound call, or to answer an incoming call. In an analog environment, the station goes from on-hook to off-hook. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF5 (11110101)
- PostVal: 0xFF (11111111)
- PreTm: 100 ms
- PostTm: 100 ms

[Net_Answer \(Loop Start Net Answer Signal\)](#)

Number: 0xC15CA023

Description: The **Net_Answer** parameter defines the transition signal that, when received, indicates that the network has answered an outbound call. In an analog environment, when the

station goes off-hook, the network answers with loop current. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF5 (11110101)
- PostVal: 0xF0 (11110000)
- PreTm: 100 ms
- PostTm: 100 ms

Net_Drop (Loop Start Net Drop Signal)

Number: 0xC15CA024

Description: The **Net_Drop** parameter defines the transition signal that, when received, indicates that the network has dropped the call. In an analog environment, with the station off-hook, the network hangs up by dropping loop current. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xA0 (10100000)
- PostVal: 0xAA (10101010)
- PreTm: 100 ms
- PostTm: 100 ms

Net_Abandon (Loop Start Net Abandon Signal)

Number: 0xC15CA025

Description: The **Net_Abandon** parameter defines the transition signal that, when received, indicates the network has dropped an offered call, that is, the network stops ringing the line. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF0 (11110000)
- PostVal: 0xF5 (11110101)
- PreTm: 1300 ms
- PostTm: 4500 ms

Net_RingOn (Loop Start Net Ring On Signal)

Number: 0xC15CA026

Description: The **Net_RingOn** parameter defines the transition signal that, when received, indicates that the network is ringing the line, and an inbound call is offered. In an analog environment, the station is on-hook and the network rings the station. This is the leading edge of

the ring. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF5 (11110101)
- PostVal: 0xF0 (11110000)
- PreTm: 3900 ms
- PostTm: 50 ms

Net_RingOff (Loop Start Net Ring Off Signal)

Number: 0xC15CA027

Description: The **Net_RingOff** parameter defines the transition signal that, when received, indicates that the network is still offering an inbound call, but has stopped ringing the line. In an analog environment, the station is on-hook and the network pauses between rings. This is the trailing edge of the ring. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF0 (11110000)
- PostVal: 0xF5 (11110101)
- PreTm: 1300 ms
- PostTm: 0 ms

PBX_FlashOpen (Loop Start PBX Flash Open Signal)

Number: 0xC15CA029

Description: When flash hook transfer is enabled, the **PBX_FlashOpen** parameter defines the transition signal that is sent to drop a call. In an analog environment, the station drops the call with a flash hook. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xFF (11111111)
- PostVal: 0xF5 (11110101)
- PreTm: 100 ms
- PostTm: 1000 ms

Net_FlashDrop (Loop Start Net Flash Drop Signal)

Number: 0xC15CA02A

Description: When flash hook transfer is enabled, the **Net_FlashDrop** parameter defines the transition signal that, when received, indicates that the network has dropped the call. For detailed

information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xA0 (10100000)
- PostVal: 0xAA (10101010)
- PreTm: 100 ms
- PostTm: 1000 ms

PBX_Flash (Loop Start PBX Flash Signal)

Number: 0xC15CA031

Description: The **PBX_Flash** parameter defines the pulse signal used to initiate a blind transfer while the call is connected. For detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

Values:

- OffVal: 0xFF (11111111)
- OnVal: 0xF5 (11110101)
- PreTm: 100 ms
- MinTm: 210 ms
- NomTm: 250 ms
- MaxTm: 280 ms
- PostTm: 100 ms

Loop Start Train Definition

Number: 0xC15CA032

Description: The Loop Start Train Definition defines a set of transitions from one signaling state to another in a predefined pattern (set of pulses). This parameter is used to define CAS signals

required by a protocol. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- OffVal: 0xCC (11001100)
- OnVal: 0xC4 (11000100)
- pulseTmMin: 32
- pulseTmMax: 32
- pulseTmNom: 32
- preTm: 600
- interTmMin: 64
- interTmMax: 64
- interTmNom: 64
- postTm: 20
- digitCount: 12
- pulseCount: 10,0
- label: 1,1,2,2,3,3,4,4,5,5,6,6,7,7,8,8,9,9,11,#,12,*

Loop Start Sequence Definition

Number: 0xC15CA033

Description: The Loop Start Sequence Definition defines a set of trains for use with HDSI and Dialogic Integrated Series boards. This parameter is used to define CAS signals required by a protocol. For detailed information about sequence signals and their associated values, see [Section 3.5.5, “Sequence Signal”](#), on page 41.

Values:

- TrainSigId: 0xC15CA03
- preTm: 2
- interTmMin: 720
- interTmMax: 660
- interTmNom: 660
- postTm: 1600

6.15 [CAS] Parameters for T1 Ground Start Signals

The basis for the T1 ground start protocol is Channel Associated Signaling (CAS). The CAS component is responsible for the generation and detection of CAS signals on the phone network interface. The CAS T-1 ground start signals are defined in this section of the CONFIG file and assigned as variants in the [CHP] T-1 Protocol Variant Definition section of the CONFIG file. For details, see [Section 6.20, “\[CHP\] T1 Protocol Variant Definitions”](#), on page 134.

Note: The CAS signaling parameters should only be modified by experienced users if the default settings do not match what the line carrier or PBX is sending or expecting for the line protocol configuration running on the card.

CAS T1 ground start parameters include:

- [PBX_Ground](#) (Ground Start PBX Ground Signal)
- [PBX_Answer](#) (Ground Start PBX Answer Signal)
- [PBX_Release](#) (Ground Start PBX Release Signal)
- [PBX_Drop](#) (Ground Start PBX Drop Signal)
- [Net_Ground](#) (Ground Start Net Ground Signal)
- [Net_Drop](#) (Ground Start Net Drop Signal)
- [Ring_On](#) (Ground Start Ring On Signal)
- [Ring_Off](#) (Ground Start Ring Off Signal)
- [PBX_FlashDrop](#) (Ground Start PBX Flash Drop Signal)
- [Net_FlashDrop](#) (Ground Start Net Flash Drop Signal)
- [Net_Answer](#) (Ground Start Net Answer Signal)
- [PBX_Flash](#) (Ground Start PBX Flash Signal)

[PBX_Ground](#) (Ground Start PBX Ground Signal)

Number: 0xC15CA041

Description: The **PBX_Ground** parameter defines the transition signal sent by the station to make an outbound call, or to answer an incoming call (off-hook). From the station side, it is the GS-FXS transmitting a generic seize, and from the corresponding office or network side, it is the GS-FXO receiving a generic seize. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF5 (11110101)
- PostVal: 0xF0 (11110000)
- PreTm: 100 ms
- PostTm: 100 ms

[PBX_Answer](#) (Ground Start PBX Answer Signal)

Number: 0xC15CA042

Description: The **PBX_Answer** parameter defines the transition signal sent by the station (GS-FXS) when an inbound call is answered. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xA5 (10100101)
- PostVal: 0xFF (11111111)
- PreTm: 100 ms
- PostTm: 100 ms

PBX_Release (Ground Start PBX Release Signal)

Number: 0xC15CA043

Description: The **PBX_Release** parameter defines the transition signal sent by the station (GS-FXS) to release an outbound call. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF0 (11110000)
- PostVal: 0xF5 (11110101)
- PreTm: 50 ms
- PostTm: 50 ms

PBX_Drop (Ground Start PBX Drop Signal)

Number: 0xC15CA044

Description: The **PBX_Drop** parameter defines the transition signal used by the station (GS-FXS) to know that the network (GS-FXO) has dropped the call. The network generates a GS_Net_Drop signal. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xFF (11111111)
- PostVal: 0xF5 (11110101)
- PreTm: 50 ms
- PostTm: 100 ms

Net_Ground (Ground Start Net Ground Signal)

Number: 0xC15CA045

Description: The **Net_Ground** parameter defines the transition signal sent by the network (GS-FXO) to make an outbound call, or to answer an incoming call. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xAA (10101010)
- PostVal: 0xA0 (10100000)
- PreTm: 100 ms
- PostTm: 50 ms

Net_Drop (Ground Start Net Drop Signal)

Number: 0xC15CA046

Description: The **Net_Drop** parameter defines the transition signal that, when received by the station (GS-FXS), indicates that the network has dropped the call. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xA0 (10100000)
- PostVal: 0xAA (10101010)
- PreTm: 100 ms
- PostTm: 50 ms

Ring_On (Ground Start Ring On Signal)

Number: 0xC15CA047

Description: The **Ring_On** parameter defines the transition signal generated by the network (GS-FXO) to ring the line, and indicate an inbound call is offered to the station (GS-FXS). This is the leading edge of the ring. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xF5 (11110101)
- PostVal: 0xF0 (11110000)
- PreTm: 3900 ms
- PostTm: 50 ms

Ring_Off (Ground Start Ring Off Signal)

Number: 0xC15CA048

Description: The **Ring_Off** parameter defines the transition signal generated by the network (GS-FXO) to stop the “ring” on a line when a call is offered to the station (GS-FXS). This is the trailing edge of the ring. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

This signal indicates that the network (GS-FXO) is “ringing” the line, and an inbound call is offered to the station (GS-FXS). This is the trailing edge of the ring.

Values:

- PreVal: 0xF0 (11110000)
- PostVal: 0xF5 (11110101)
- PreTm: 1300 ms
- PostTm: 0 ms

PBX_FlashDrop (Ground Start PBX Flash Drop Signal)

Number: 0xC15CA049

Description: When flash hook transfer is enabled, the **PBX_FlashDrop** parameter defines the transition signal that, when received, indicates that the PBX has dropped the call. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xFF (11111111)
- PostVal: 0xF5 (11110101)
- PreTm: 50 ms
- PostTm: 1000 ms

Net_FlashDrop (Ground Start Net Flash Drop Signal)

Number: 0xC15CA04A

Description: When flash hook transfer is enabled, the **Net_FlashDrop** parameter defines the transition signal that, when received, indicates that the network has dropped the call. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xA0 (10100000)
- PostVal: 0xAA (10101010)
- PreTm: 100 ms
- PostTm: 1000 ms

Net_Answer (Ground Start Net Answer Signal)

Number: 0xC15CA04B

Description: The **Net_Answer** parameter defines the transition signal that, when received, indicates that the network has answered an outbound call. For detailed information about transition signals and their associated values, see [Section 3.5.2, “Transition Signal”](#), on page 35.

Values:

- PreVal: 0xAA (10101010)
- PostVal: 0xA0 (10100000)
- PreTm: 100 ms
- PostTm: 50 ms

PBX_Flash (Ground Start PBX Flash Signal)

Number: 0xC15CA051

Description: The **PBX_Flash** parameter defines the pulse signal used by the station to initiate a blind transfer while the call is connected. For detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

Values:

- OffVal: 0xFF (11111111)
- OnVal: 0xF5 (11110101)
- PreTm: 100 ms
- MinTm: 210 ms
- NomTm: 250 ms
- MaxTm: 280 ms
- PostTm: 100 ms

6.16 [CAS] User-defined CAS and Tone Signal Parameters

The CAS component is responsible for the generation and detection of CAS signals on the phone network interface. The CAS user-defined and tone signals are defined in this section of the CONFIG file and assigned as variants in the [CHP] section of the CONFIG file. For details, see [Section 6.20, “\[CHP\] T1 Protocol Variant Definitions”](#), on page 134.

Note: The CAS signaling parameters should only be modified by experienced users if the default settings do not match what the line carrier or PBX is sending or expecting for the line protocol configuration running on the card.

Hookflash (Hook Flash)

Number: 0x9201

Description: The **Hookflash** parameter defines the pulse signal used to define hookflash times for HDSI and Dialogic Integrated Series boards. For detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

Note: Only modifications to the MinTm and MaxTm values are supported.

Values:

For HDSI Boards:

- OffVal: 0xFF (11111111)
- OnVal: 0xF5 (11110101)
- PreTm: 100 ms
- MinTm: Time (milliseconds)
- NomTm: 650 ms
- MaxTm: Time (milliseconds)
- PostTm: 100 ms

For Dialogic Integrated Series Boards:

- OffVal: 0xCC (11001100)
- OnVal: 0xC4 (11110100)
- PreTm: 100 ms
- MinTm: Time (milliseconds)
- NomTm: 250 ms
- MaxTm: Time (milliseconds)
- PostTm: 100 ms

6.17 [CAS] User-defined Signals for Selectable Rings Parameters

The CAS component is responsible for the generation and detection of CAS signals on the phone network interface. The CAS user-defined signals for selectable rings are defined in this section of the CONFIG file and assigned as variants in the [CHP] section of the CONFIG file. For details, see [Section 6.20, “\[CHP\] T1 Protocol Variant Definitions”](#), on page 134.

Note: The CAS signaling parameters should only be modified by experienced users if the default settings do not match what the line carrier or PBX is sending or expecting for the line protocol configuration running on the card.

The CAS user-defined signals for selectable rings parameters include:

- [Net_RingOn](#) (Ring Cadence On-time)
- [Net_RingOff](#) (Ring Cadence Off-time)

Net_RingOn (Ring Cadence On-time)

Number: 0x9110

Description: The **Net_RingOn** parameter is one of two pulse signal used to define the ring cadence for HDSI and Dialogic Integrated Series boards. **Net_RingOn** defines the on-time signal and **Net_RingOff** defines the off-time signal. For detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

The value used for the MinTm, NomTm, and MaxTm (the same time must be used for all three values) is the total on-time duration of the pulse. If MinTm, NomTm, and MaxTm are set to 2000, then the total on-time duration of the pulse is 2000 ms. The PostTm value is not included in the total on-time duration since this value defines part of the off-time duration.

Note: Only modifications to the MinTm, NomTm, and MaxTm values are supported. When modifying these values, the same time must be used for all three values.

Values:

- OffVal: 0xA4 (10101010)
- OnVal: 0xAA (10100100)
- PreTm: 0 ms
- MinTm: 2000 ms
- NomTm: 2000 ms
- MaxTm: 2000 ms
- PostTm: 50 ms

Net_RingOff (Ring Cadence Off-time)

Number: 0x9111

Description: The **Net_RingOff** parameter is one of two pulse signal used to define the ring cadence for HDSI and Dialogic Integrated Series boards. **Net_RingOn** defines the on-time signal and **Net_RingOff** defines the off-time signal. For detailed information about pulse signals and their associated values, see [Section 3.5.3, “Pulse Signal”](#), on page 37.

The total off-time duration of the pulse includes the **Net_RingOn** PostTm duration, the **NetRingOff** Pre-Pulse duration, and the **NetRingOff** on-time duration (defined by MinTm, NomTm, or MaxTm since all three times must be set to the same value). If the **Net_RingOn**

PostTm is set to 50 ms, the **Net_RingOff** PreTm duration is set to 50 ms, and the **Net_RingOff** on-time duration is set to 3900 ms, the total off-time duration is 4000 ms.

Note: Only modifications to the MinTm, NomTm, and MaxTm values are supported. When modifying these values, the same time must be used for all three values.

Values:

- OffVal: 0xA4 (10100100)
- OnVal: 0xA4 (10100100)
- PreTm: 50 ms
- MinTm: 3900 ms
- NomTm: 3900 ms
- MaxTm: 3900 ms
- PostTm: 0 ms

6.18 [CCS] Parameters

Common Channel Signaling (CCS) supports ISDN PRI out-of-band signaling utilizing the Q.931 signaling protocol for messaging. The parameters in the [CCS] and [CSS.x] sections of the CONFIG file define the number of CCS component instances created and configure the parameters associated with each CCS instance.

The CCS parameters include:

- [INSTANCE_MAP](#) (Instance Map)
- [CCS_TMR_302](#) (Q.931 Timer 302)
- [CCS_TMR_303](#) (Q.931 Timer 303)
- [CCS_TMR_304](#) (Q.931 Timer 304)
- [CCS_TMR_305](#) (Q.931 Timer 305)
- [CCS_TMR_308](#) (Q.931 Timer 308)
- [CCS_TMR_310](#) (Q.931 Timer 310)
- [CCS_TMR_313](#) (Q.931 Timer 313)
- [CCS_TEI_RETRY](#) (TEI Retry Timer)
- [CCS_TEI_STABILITY](#) (TEI Stability Timer)
- [SYMMETRICAL_LINK](#) (Symmetrical Command Response Protocol)
- [CCS_PROTOCOL_MODE](#) (ISDN Protocol Mode)
- [CCS_SWITCH_TYPE](#) (Switch Type)
- [L2_TRACE](#) (Layer 2 Access Flag)

INSTANCE_MAP (Instance Map)

Number: 5

Description: The **INSTANCE_MAP** parameter is a bitmap that defines the number of CCS instances created. A CCS instance is created for each network interface that supports common

channel signaling. The bitmap's least significant bit corresponds to the CCS instance associated with the first network interface on the board. The next least significant bit corresponds to the CCS instance associated with the second network interface on the board, and so on. If the bit associated with a network interface has a value of 1, then a CCS instance is created for that network interface. For example, a value of 0x5 (0101) means that CCS instances 1 and 3 are created allowing for common channel signaling on network interfaces 1 and 3.

Values: 0 to 0xffff

CCS_TMR_302 (Q.931 Timer 302)

Number: 0x14

Description: The **CCS_TMR_302** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Note: This parameter only applies to E1 boards.

Values:

- 0: Use the default value for the switch (15000 ms)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TMR_303 (Q.931 Timer 303)

Number: 0x0b

Description: The **CCS_TMR_303** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Values:

- 0: Use the default value for the switch (4000 ms)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TMR_304 (Q.931 Timer 304)

Number: 0x0c

Description: The **CCS_TMR_304** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Note: This parameter only applies to E1 boards.

Values:

- 0: Use the default value for the switch (30000 ms)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TMR_305 (Q.931 Timer 305)

Number: 0x0d

Description: The **CCS_TMR_305** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Values:

- 0: Use the default value for the switch (4000 ms for T1, 30000 ms for E1)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TMR_308 (Q.931 Timer 308)

Number: 0x0e

Description: The **CCS_TMR_308** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Values:

- 0: Use the default value for the switch (4000 ms)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TMR_310 (Q.931 Timer 310)

Number: 0x0f

Description: The **CCS_TMR_310** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Values:

- 0: Use the default value for the switch (10000 ms)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TMR_313 (Q.931 Timer 313)

Number: 0x10

Description: The **CCS_TMR_313** parameter is an ISDN Layer 3 timer. For exact timer definitions, refer to the Q.931 specification and the switch specifications.

Values:

- 0: Use the default value for the switch (4000 ms)
- -1: Disable the timer (has the same effect as setting the timer value to 0)
- n > 1: Timer value (milliseconds)

CCS_TEI_RETRY (TEI Retry Timer)

Number: 0x15

Description: The **CCS_TEI_RETRY** parameter defines the maximum amount of time that the data link remains in state 4 (TEI_ASSIGNED) before transitioning to state 5 (TEI_WAIT_ESTABLISH).

Values: Time (milliseconds)

CCS_TEI_STABILITY (TEI Stability Timer)

Number: 0x16

Description: The **CCS_TEI_STABILITY** parameter defines the minimum transition time between data link state 4 (TEI_ASSIGNED) and data link state 5 (TEI_WAIT_ESTABLISH).

Values: 0 to 100,000 (milliseconds)

SYMMETRICAL_LINK (Symmetrical Command Response Protocol)

Number: 0x13

Description: The **SYMMETRICAL_LINK** parameter enables or disables symmetrical data link operations.

Values:

- 0: Disable symmetrical data link operations
- 1: Enable symmetrical data link operations

CCS_PROTOCOL_MODE (ISDN Protocol Mode)

Number: 0x17

Description: The **CCS_PROTOCOL_MODE** parameter sets the network user-side protocol. User-side protocol is also known as TE (terminal emulation) protocol and Network-side protocol is also known as NT (network termination) protocol. This parameter also can be used to configure Q.SIG Master/Slave.

Note: Master/Slave mode pertains to Q.SIG protocols only.

Note: With the exception of the Q.SIG protocol (where the User-side and Network-side protocols are symmetrical), using the **CCS_PROTOCOL_MODE** parameter to configure a Network-side protocol is supported for back-to-back testing purposes only. The Network-side firmware is not fully qualified for operation in a deployment environment.

Values:

- 0: User or Slave Mode (Q.SIG)
- 1: Network or Master Mode (Q.SIG)

CCS_SWITCH_TYPE (Switch Type)

Number: 0x07

Description: The **CCS_SWITCH_TYPE** parameter defines the network switch type.

Values:

- 1: 4ess
- 2: 5ess
- 3: dms
- 4: ntt
- 6: dass2
- 7: net5
- 10: qsige1
- 11: qsigt1
- 12: ni2
- 13: dpnss

L2_TRACE (Layer 2 Access Flag)

Number: 0x09

Description: The **L2_TRACE** parameter is the ISDN Layer 2 access flag. When Layer 2 (Data Link layer) access is disabled, ISDN Link Access Protocol for the D channel (LAPD) functionality is obtained by accessing ISDN Call Control and Layer 3 (Network layer). When Layer 2 access is enabled, call control is no longer supported for the channels on this line and ISDN LAPD functionality is obtained by accessing Layer 2 directly.

Values:

- 0: Disable Layer 2 access
- 1: Enable Layer 2 access

6.19 [CHP] Parameters

The Channel Protocol (CHP) component implements the telephony communication protocol that is used on the network interface. The CHP component parameters include:

- [R4Compatibility \(R4 Compatibility Flag\)](#)
- [InitialChanState \(Initial Channel State\)](#)
- [DisableBlock \(Disable Block\)](#)

R4Compatibility (R4 Compatibility Flag)

Number: 0x1310

Description: The **R4Compatibility** parameter enables or disables R4 (Global Call) compatibility features. This parameter also enables retrieval of DNIS and ANI information in the offered call state.

Values:

- 0: Disable R4 compatibility [default]
- 1: Enable R4 compatibility
- 2: Disable R4 compatibility

InitialChanState (Initial Channel State)

Number: 0x1311

Description: The **InitialChanState** parameter defines the initial B channel state (CHP channel state) at the end of system initialization. The initial state of the ISDN B channel is either InService or OutOfService. Once the board is initialized, this initial state will be set on all channels of the board until a user application is invoked and explicitly modifies the state of the channel.

Values:

- 1: InService
- 2: OutOfService

Guidelines: This parameter must be set to OutOfService for ISDN protocols.

DisableBlock (Disable Block)

Number: 0x1312

Description: The **DisableBlock** parameter defines whether or not a blocking pattern (message) is sent on a channel when the channel is in the OutofService state. When **DisableBlock** is disabled, no pattern is sent (the switch will not present calls to the B channel).

When **DisableBlock** is enabled and a channel is in the InService state (**InitialChanState=1**), the protocol will send a non-blocking pattern on the channel (the switch will present calls to the B channel). When **DisableBlock** is enabled and a channel is in the OutofService state (**InitialChanState=2**), the protocol will send a blocking pattern on the channel (the switch will present calls to the B channel but these calls will be abandoned by the switch since the application will not respond to the call).

Values:

- 0: Disable blocking
- 1: Enable blocking

6.20 [CHP] T1 Protocol Variant Definitions

The CHP parameters define the line configurations that will be used by each network interface on the Intel telecom board. Within the [CHP] section of the CONFIG file, different possible T1 protocol variants (protocol configuration settings) can be implemented and are defined using the `Variant Define n` command. The `Variant Define n` is later set for each network channel in the [TSC] `defineBSet` section of the CONFIG file.

Note: Not all of the following variants exist in all CONFIG files. For PDK parameters in particular, refer to the *Global Call County Dependent Parameters (CDP) Configuration Guide*.

For a detailed description of the `Variant Define n` command, see [Section 3.6, “\[CHP\] Section”](#), on page 43. For a detailed description of the `defineBSet` command, also see [Section 3.7, “\[TSC\] Section”](#), on page 45.

Although T-1 signals (E&M wink, loop start and ground start) are assigned as part of the T-1 protocol variant definitions, these signals are defined in the [CAS] section of the CONFIG file. For detailed information about specific T-1 signal definitions, see the following:

- [Section 6.13, “\[CAS\] Parameters for T1 E&M Signals”](#), on page 113
- [Section 6.14, “\[CAS\] Parameters for T1 Loop Start Signals”](#), on page 115
- [Section 6.15, “\[CAS\] Parameters for T1 Ground Start Signals”](#), on page 120

Unless otherwise noted, T-1 Protocol Variant parameters apply to all signal types: E&M wink, loop start, and ground start. Parameters that only apply to a specific signal type are prefaced with the applicable signal type. For example, the parameter **EM_offhook** only applies to E&M wink signaling and the parameter **ProtocolType** applies to E&M wink, loop start, and ground start signaling.

The T-1 Protocol Variant parameters include:

- [ProtocolType](#) (Protocol Type)
- [Wink](#) (Wink Flag)
- [StartTimeout](#) (Start Timeout)
- [FarEndAnswer](#) (Far End Answer)
- [AnswerTimeout](#) (Answer Timeout)
- [ReconnectTimeout](#) (Reconnect Timeout)
- [DisconnectTimeout](#) (Disconnect Timeout)
- [InterCallDelay](#) (Inter-call Delay)
- [Dial](#) (Outbound Dialing Flag)
- [DialFormat](#) (Dial Digits Format)
- [ANI](#) (ANI Flag)
- [ANIFormat](#) (ANI Digit Format)
- [ANICount](#) (ANI Digit Count)
- [DNIS](#) (DNIS Flag)
- [DNISFormat](#) (DNIS Digit Format)

- DNISCount (DNIS Digit Count)
- PreDigitTimeout (Pre-digit Timeout)
- InterDigitTimeout (Inter-digit Timeout)
- CallProgress (Call Progress Detection)
- CaRingingSet (Ringing Signal)
- CaBusySet (Busy Signal)
- CaSitSet (SIT Signal)
- CaFaxSet (Fax Signal)
- CaPvdId (Voice Detection Signal)
- CaPamdId (Answering Machine Signal)
- CaSignalTimeout (Signal Timeout)
- CaAnswerTimeout (Answer Timeout)
- CaPvdTimeout (Voice Detection Timeout)
- DialToneId (Dial Tone Signal)
- CaDialTimeout (Dial Timeout)
- BlindTransfer (Blind Transfer)
- BtDialToneId (DTD Signal)
- BtStartTimeout (DTD Timeout)
- BtAddressDef (Address Definition)
- BtOrigFormat (Originator Address Digits)
- BtDestFormat (Destination Address Digits)
- BtCancelDigitsFormat (Cancel Digits Format)
- BtCancelFlashCount (Cancel Flash Count)
- BtCancelInterFlashDuration (Cancel Inter-flash Duration)
- BtCancelDigits (Cancel Digits)
- BtDestSuffix (Destination Suffix Digits)
- BtDestPrefix (Destination Prefix Digits)
- BtOrigPrefix (Originator Prefix Digits)
- BtOrigSuffix (Originator Suffix Digits)
- PolarityDetection (Polarity Flag)
- EM_Offhook (E&M Off-hook Signal)
- EM_Onhook (E&M On-hook Signal)
- EM_FlashOnhook (E&M Flash On-hook Signal)
- EM_Wink (E&M Wink Signal)
- EM_Flash (E&M Flash Signal)
- LS_PBX_Open (Loop Start PBX Open)
- LS_PBX_FlashOpen (Loop Start PBX Flash Open Signal)
- LS_PBX_Close (Loop Start PBX Close Signal)

- LS_PBX_Flash (Loop Start PBX Flash Signal)
- LS_Net_Answer (Loop Start Net Answer Signal)
- LS_Net_Drop (Loop Start Net Drop Signal)
- LS_Net_FlashDrop (Loop Start Net Flash Drop Signal)
- LS_Net_Abandon (Loop Start Net Abandon)
- LS_Net_RingOn (Loop Start Net Ring On Signal)
- LS_Net_RingOff (Loop Start Net Ring Off)
- GS_PBX_Ground (Ground Start PBX Ground Signal)
- GS_PBX_Answer (Ground Start PBX Answer Signal)
- GS_PBX_Release (Ground Start PBX Release Signal)
- GS_PBX_Drop (Ground Start PBX Drop Signal)
- GS_PBX_FlashDrop (Ground Start PBX Flash Drop Signal)
- GS_PBX_Flash (Ground Start PBX Flash Signal)
- GS_Net_Ground (Ground Start Net Ground Signal)
- GS_Net_Drop (Ground Start Net Drop Signal)
- GS_Net_FlashDrop (Ground Start Flash Drop Signal)
- GS_Net_RingOn (Ground Start Net Ring On Signal)
- GS_Net_RingOff (Ground Start Net Ring Off Signal)

ProtocolType (Protocol Type)

Description: The **ProtocolType** parameter defines the type of T1 protocol used on a channel.

Note: The **ProtocolType** parameter is also used when defining ISDN protocol variants.

Values:

- 1: E&M wink
- 2: Loop start-FXS
- 3: Ground start-FXS
- 4: Loop start-FXO (This value is not supported.)
- 5: Ground start-FXO (Supported by HDSI and Dialogic Integrated Series boards only.)

Wink (Wink Flag)

Description: The **Wink** parameter enables wink detection for outbound calls and wink generation for inbound calls. This parameter is enabled only when using T-1 E&M wink protocols. For all other protocols, this parameter is disabled.

If wink detection (generation) is enabled, up to three winks are supported in a sequence. Examples of CONFIG file settings for **ANI**, **Wink**, **DNIS**, and **R4Compatibility** parameters for 1, 2, and 3 wink sequences are as follows:

- 1 Wink Example: Seize (Wink) DNIS (Answer) ANI

```
Variant ANI      2      ! No=0, Pre=1, Post=2
Variant Wink     1      ! 1 wink sequence
Variant DNIS     y      ! Enable DNIS collection
SetParm=0x1310,1 ! R4 Compatibility Flag
                  ! 0=default, 1=enable, 2=disable
```

In the 1 Wink example, ANI information is collected after the call is answered, there is one wink in the sequence, DNIS information is collected, and the R4 Compatibility Flag is turned on.

- 2 Wink Example: Seize (Wink) ANI (DNIS) (Wink) Answer

```
Variant ANI      1      ! No=0, Pre=1, Post=2
Variant Wink     2      ! 1 wink sequence
Variant DNIS     y      ! Enable DNIS collection
SetParm=0x1310,1 ! R4 Compatibility Flag
                  ! 0=default, 1=enable, 2=disable
```

In the 2 Wink example, ANI information is collected before the call is answered, there are two winks in the sequence, DNIS information is collected, and the R4 Compatibility Flag is turned on.

- 3 Wink Example: Seize (Wink) DNIS (Wink) ANI (Wink) Answer

```
Variant ANI      1      ! No=0, Pre=1, Post=2
Variant Wink     3      ! 1 wink sequence
Variant DNIS     y      ! Enable DNIS collection
SetParm=0x1310,2 ! R4 Compatibility Flag
                  ! 0=default, 1=enable, 2=disable
```

In the 3 Wink example, ANI information is collected before the call is answered, there are three winks in the sequence, DNIS information is collected, and the R4 Compatibility Flag is turned off.

Values:

- 0 or n: Disable wink
- 1 or y: Enable 2 winks in the sequence
- 2: Enable 1 wink in the sequence
- 3: Enable 3 winks in the sequence

StartTimeout (Start Timeout)

Description: The **StartTimeout** parameter is defined differently depending on the T-1 protocol used. Depending on the value of the **ProtocolType** parameter, the **StartTimeout** parameter is defined as follows:

E&M wink

The amount of time that a call originator will wait for a wink once it has seized the line for an outbound call. The outbound call will fail if this time is exceeded.

Ground start

The amount of time that a call originator will wait for the dial tone signal once it has seized the line for an outbound call. The outbound call will fail if this time is exceeded.

Loop start

The call originator will wait the specified amount of time after seizing the line for an outbound call, and then proceed to sending digits (that is, can be used to for dial tone before dialing).

Values: n > 0 (milliseconds)

FarEndAnswer (Far End Answer)

Description: The **FarEndAnswer** parameter defines whether the network will provide far end (remote) answer signaling. This parameter is enabled when using T1 loop start protocols only. For all other T-1 protocols, this parameter is disabled.

Values:

- y: Enable far end answer support
- n: Disable far end answer support

AnswerTimeout (Answer Timeout)

Description: The **AnswerTimeout** parameter defines the maximum amount of time allowed to answer a call once a remote party has sent its last wink. If the time is exceeded, the call fails. Otherwise, the timer is reset once the call is answered. This parameter is enabled only when using T1 E&M wink protocols. For all other T1 protocols, this parameter is disabled.

Values: $n > 0$ (milliseconds)

ReconnectTimeout (Reconnect Timeout)

Description: The **ReconnectTimeout** parameter defines the maximum amount of time allowed between a local disconnect (*MsgDropCall*) and a reconnect (*MSgReconnectCall*).

Values: $n > 0$ (milliseconds)

DisconnectTimeout (Disconnect Timeout)

Description: The **DisconnectTimeout** parameter defines the time before a remote drop is considered to be a disconnect. If *MsgDropCall* is followed by a *MsgReconnectCall* within this time period, then the call will be reconnected and remain in the connected state.

Note: The **DisconnectTimeout** parameter is also used when defining ISDN protocol variants.

Values: $n > 0$ (milliseconds)

Guidelines: For DNM160TEC and DMT160TEC boards, when there are 16 or more trunks in one NFAS group and calls are made on every channel at a very fast rate, the firmware may start missing calls. In this case, increase the value of the **DisconnectTimeout** parameter to at least 3000 milliseconds.

InterCallDelay (Inter-call Delay)

Description: The **InterCallDelay** parameter defines the minimum amount of time between outbound calls. This is the time the firmware will wait after a call is dropped and before making another call from the same channel.

Note: The **InterCallDelay** parameter is also used when defining ISDN Protocol variants, including E-1.

Values: $n > 0$ (milliseconds)

Dial (Outbound Dialing Flag)

Description: The **Dial** parameter enables or disables outbound dialing.

Values:

- y: Enable outbound dialing
- n: Disable outbound dialing

DialFormat (Dial Digits Format)

Description: The **DialFormat** parameter defines the format of the dial digits.

Values:

- 1: Dual Tone Multi-Frequency (DTMF)
- 2: Multi-Frequency (MF)
- 3: Dial Pulse (DP)

ANI (ANI Flag)

Description: The **ANI** parameter enables or disables the collection of ANI data. When the parameter is enabled, it also defines when the data is collected, before or after the call is answered.

Values:

- 0: Disable ANI data collection
- 1: Enable ANI data collection - pre-answer
- 2: Enable ANI data collection - post-answer

ANIFormat (ANI Digit Format)

Description: The **ANIFormat** parameter defines the format of the ANI digits.

Values:

- 1: Dual Tone Multi-Frequency (DTFM)
- 2: Multi-Frequency (MF)
- 3: Dial Pulse (DP)
- 4: Frequency Shift Keying, United States (FSK_US)
- 5: Frequency Shift Keying, Japan (FSK_JP)
- 6: Frequency Shift Keying, United Kingdom (FSK_UK - This value is not supported.)

ANICount (ANI Digit Count)

Description: The **ANICount** parameter defines the number of ANI digits to collect from the incoming call. If the parameter is set to 0, then digit collection will stop after the time-out period set by the **PreDigitTimeout** and **InterDigitTimeout** parameters defined in the [CHP] *Variant Define n* section of the CONFIG file. For details see:

- [Section 3.6, “\[CHP\] Section”](#), on page 43
- [“InterDigitTimeout \(Inter-digit Timeout\)”](#), on page 141

- [“PreDigitTimeout \(Pre-digit Timeout\)”](#), on page 140

Values:

- 0: Collect all the digits provided
- n: Number of digits to collect

DNIS (DNIS Flag)

Description: The **DNIS** parameter enables or disables DNIS data collection for inbound calls.

Values:

- y: Enable DNIS collection
- n: Disable DNIS collection

DNISFormat (DNIS Digit Format)

Description: The **DNISFormat** parameter defines the format of the DNIS digits.

Values:

- 1: Dual Tone Multi-Frequency (DTMF)
- 2: Multi-Frequency (MF)
- 3: Dial Pulse (DP)

DNISCount (DNIS Digit Count)

Description: The **DNISCount** parameter defines the number of DNIS digits to collect from the incoming call. If the parameter is set to 0, then digit collection will stop after the time-out period set by the **PreDigitTimeout** and **InterDigitTimeout** parameters defined in the [CHP] *Variant Define n* section of the CONFIG file. For details see:

- [Section 3.6, “\[CHP\] Section”](#), on page 43
- [“InterDigitTimeout \(Inter-digit Timeout\)”](#), on page 141
- [“PreDigitTimeout \(Pre-digit Timeout\)”](#), on page 140

Values:

- 0: Collect all the digits provided
- n: Number of digits to collect

PreDigitTimeout (Pre-digit Timeout)

Description: The **PreDigitTimeout** parameter defines the maximum amount of time that the protocol will wait to receive digits once a call has been initiated. E&M wink-start protocols start this time from the end of the wink.

Values: $n > 0$ (the value must be a multiple of 10 ms)

InterDigitTimeout (Inter-digit Timeout)

Description: The **InterDigitTimeout** parameter defines the maximum amount of time between digits. If a digit is not followed by another within this time limit, then digit collection is terminated.

Values: $n > 0$ (the value must be a multiple of 10 ms)

CallProgress (Call Progress Detection)

Description: The **CallProgress** parameter enables or disables call progress detection for call setup on outbound calls.

Note: The **CallProgress** parameter is also used when defining ISDN protocol variants.

Values:

- y: Enable call progress detection
- n: Disable call progress detection

CaRingingSet (Ringing Signal)

Description: The **CaRingingSet** parameter defines the signal set used to detect ringing for call progress analysis. The **CaRingingSet** parameter is also used when defining ISDN protocol variants.

- Notes:**
1. Modification of the **CaRingingSet** parameter is not supported.
 2. The **CaRingingSet** parameter is also used when defining ISDN protocol variants.

Values: 0x024940

CaBusySet (Busy Signal)

Description: The **CaBusySet** parameter defines the signal set used to detect busy for call progress analysis.

- Notes:**
1. Modification of the **CaBusySet** parameter is not supported.
 2. The **CaBusySet** parameter is also used when defining ISDN protocol variants.

Values: 0x004DE0

CaSitSet (SIT Signal)

Description: The **CaSitSet** parameter defines the signal set used to detect Standard Information Tones (SIT) for call progress analysis.

- Notes:**
1. Modification of the **CaSitSet** parameter is not supported.
 2. The **CaSitSet** parameter is also used when defining ISDN protocol variants.

Values: 0x02F240

CaFaxSet (Fax Signal)

Description: The **CaFaxSet** parameter defines the signal set used to detect fax tones for call progress analysis.

- Notes:**
1. Modification of the **CaFaxSet** parameter is not supported.
 2. The **CaFaxSet** parameter is also used when defining ISDN protocol variants.

Values: 0x014B80

CaPvdId (Voice Detection Signal)

Description: The **CaPvdId** parameter defines the signal to use for Positive Voice Detection (PVD) for call progress analysis.

- Notes:**
1. Modification of the **CaPvdId** parameter is not supported.
 2. The **CaPvdId** parameter is also used when defining ISDN protocol variants.

Values: 0x01F4C1

CaPamdId (Answering Machine Signal)

Description: The **CaPamdId** parameter defines the signal to use for Positive Answering Machine Detection (PAMD) for call progress analysis.

- Notes:**
1. Modification of the **CaPamdId** parameter is not supported.
 2. The **CaPamdId** parameter is also used when defining ISDN protocol variants.

Values: 0x01A041

CaSignalTimeout (Signal Timeout)

Description: The **CaSignalTimeout** parameter defines the maximum amount of time to wait to detect a call progress tone from one of the call analysis signal sets. For T1 loop start and ground start protocols, if this time is exceeded, then the outbound call will fail with the reason being NoAnswer.

Note: The **CaSignalTimeout** parameter is also used when defining ISDN protocol variants.

Values: $n > 0$ (the value must be a multiple of 10 ms)

CaAnswerTimeout (Answer Timeout)

Description: The **CaAnswerTimeout** parameter defines the maximum amount of time (in milliseconds) that call analysis will wait for ringback to stop. This is equivalent to the number of rings. For T1 loop start and ground start protocols, if this time is exceeded, then the outbound call will fail with the reason being NoAnswer.

Note: The **CaAnswerTimeout** parameter is also used when defining ISDN protocol variants.

Values: $n > 0$ (the value must be a multiple of 10 ms)

CaPvdTimeout (Voice Detection Timeout)

Description: The **CaPvdTimeout** parameter defines the maximum amount of time that call analysis will wait to detect positive answering machine detection (PAMD) or positive voice detection (PVD) once ringback has ceased. If this time is exceeded, then connection type will be reported as “Unknown”, that is, not fax, PAMD, or PVD.

Note: The **CaPvdTimeout** parameter is also used when defining ISDN protocol variants.

Values: $n > 0$ (the value is expressed in multiples of 10 milliseconds. For example, a value of 200 equals 2000 milliseconds, or 2 seconds)

- For analog boards: default = 800
- For digital boards: default = 400

DialToneId (Dial Tone Signal)

Description: The **DialToneId** parameter defines the signal to use for dial tone detection. This parameter is used for loop start protocols. If this is set to 0 (Null), then dial tone detection is disabled.

Values:

- 0: Disable dial tone detection
- 0x00A261: Enable dial tone detection

CaDialTimeout (Dial Timeout)

Description: The **CaDialTimeout** parameter defines the maximum amount of time that call analysis will wait to detect a tone, for example, busy, SIT tones, and ring back.

Values: $n > 0$ (the value must be a multiple of 10 ms)

BlindTransfer (Blind Transfer)

Description: The **BlindTransfer** parameter enables or disables blind transfer.

Values:

- 0: Disable blind transfer
- 1: Enable blind transfer

BtDialToneId (DTD Signal)

Description: The **BtDialToneId** parameter works together with the **DialToneId** parameter and defines the signal used for dial tone detection in a blind transfer. If **BtDialToneId** is 0, then the protocol will wait for a time period (**BtStartTimeout**) before sending digits after generating a flash.

Values:

- 0: Pause (the pause time is equal to the value of **BtStartTimeout**)
- n: Signal parameter number

BtStartTimeout (DTD Timeout)

Description: The **BtStartTimeout** parameter is used only when the **BtDialToneId** parameter is set to a value of 0 (zero). This parameter defines the maximum amount of time that the protocol will wait for detecting dial tone after a flash has been generated. Once the **BtStartTimeout** value has been reached, a transfer failure will occur with the reason being ProtocolError, and the call will return to the connected state.

If the **BtDialToneId** parameter is set to 0 (zero), **BtStartTimeout** is the time period that the protocol will wait after a flash has been generated before sending digits

Values: n > 0 (milliseconds)

BtAddressDef (Address Definition)

Description: The **BtAddressDef** parameter defines what addresses will be sent on a blind transfer, and the order in which they will be sent. Addresses are analogous to phone numbers dialed (destination = DNIS), or dialing from (origination = ANI).

Values:

- 1: None
- 2: Destination
- 3: Origination
- 4: Destination, Origination
- 5: Origination, Destination

BtOrigFormat (Originator Address Digits)

Description: The **BtOrigFormat** parameter defines the format of the originator address digits in a blind transfer. The address is analogous to ANI (caller ID) information.

Values:

- 1: Dual Tone Multi-Frequency (DTMF)
- 2: Multi-Frequency (MF)
- 3: Dial Pulse (DP)

BtDestFormat (Destination Address Digits)

Description: The **BtDestFormat** parameter defines the format of destination address digits in a blind transfer. The address is analogous to DNIS information.

Values:

- 1: Dual Tone Multi-Frequency (DTMF)
- 2: Multi-Frequency (MF)
- 3: Dial Pulse (DP)

BtCancelDigitsFormat (Cancel Digits Format)

Description: The **BtCancelDigitsFormat** parameter defines the format of Cancel digits in a blind transfer.

Values:

- 1: Dual Tone Multi-Frequency (DTMF)
- 2: Multi-Frequency (MF)
- 3: Dial Pulse (DP)

BtCancelFlashCount (Cancel Flash Count)

Description: The **BtCancelFlashCount** parameter defines the number of flashes to be sent to cancel or abort a transfer.

Values: $n > 0$

BtCancelInterFlashDuration (Cancel Inter-flash Duration)

Description: The **BtCancelInterFlashDuration** parameter defines the time between flashes for canceling or aborting a transferred call.

Values: $n > 0$ (milliseconds)

BtCancelDigits (Cancel Digits)

Description: The **BtCancelDigits** parameter defines the digits to dial after the flash sequence to cancel or abort a call transfer. For example, *69.

Values: Digits

BtDestSuffix (Destination Suffix Digits)

Description: The **BtDestSuffix** parameter defines the digits to be dialed immediately following the destination address (dialed number/DNIS) in a blind transfer. For example, *34.

Values: Digits

BtDestPrefix (Destination Prefix Digits)

Description: The **BtDestPrefix** parameter defines the digits to be dialed immediately before the destination address (dialed number/DNIS) in a blind transfer. For example, *54

Values: Digits

BtOrigPrefix (Originator Prefix Digits)

Description: The **BtOrigPrefix** parameter defines the digits to be dialed immediately before the originator address (calling number/ANI) in a blind transfer. For example, *94.

Values: Digits

BtOrigSuffix (Originator Suffix Digits)

Description: The **BtOrigSuffix** parameter defines the digits to be dialed immediately following the originator address (calling number/ANI) in a blind transfer. For example, *64.

Values: Digits

PolarityDetection (Polarity Flag)

Description: The **PolarityDetection** parameter defines whether the CO reverses battery polarity as the first step before sending the call ring. In Japan, the CO (Nippon Telephone and Telegraph, NTT) reverses the loop polarity prior to sending a call. When **PolarityDetection** parameter is enabled, the polarity reversal sent from the CO in NTT is used when detecting the incoming call.

Values:

- 0: Disable polarity reversal (normal polarity)
- 1: Enable polarity reversal (reverse polarity)

EM_Offhook (E&M Off-hook Signal)

Description: The **EM_Offhook** parameter defines the T-1 E&M wink off-hook CAS transition signal id. This signal is sent to make an outbound call, or to answer an incoming call. Receiving this signal indicates that the network is offering a call.

Values: 0xC15CA001

EM_Onhook (E&M On-hook Signal)

Description: The **EM_Onhook** parameter defines the T-1 E&M wink on-hook CAS transition signal id. This signal is sent to drop a call.

Values: 0xC15CA002

EM_FlashOnhook (E&M Flash On-hook Signal)

Description: The **EM_FlashOnhook** parameter defines the T-1 E&M wink on-hook CAS transition signal used when flash hook transfer (blind transfer) is enabled. It defines the transition signal from an off-hook state to a flash on-hook state during a blind transfer. This signal is sent to drop a call.

Values: 0xC15CA003

EM_Wink (E&M Wink Signal)

Description: The **EM_Wink** parameter defines the T-1 E&M wink CAS pulse signal ID. This signal is used as part of the inbound call setup for wink-start E&M protocols. The signal is sent to tell the far end to proceed with the call in response to EM_Offhook.

Values: 0xC15CA011

EM_Flash (E&M Flash Signal)

Description: The **EM_Flash** parameter defines the T-1 E&M wink flash CAS pulse signal ID. This signal is used to initiate a blind transfer while the call is connected.

Values: 0xC15CA012

LS_PBX_Open (Loop Start PBX Open)

Description: The **LS_PBX_Open** parameter defines the T-1 loop start PBX Open CAS transition signal ID. This signal is sent to drop a call.

Values: 0xC15CA021

LS_PBX_FlashOpen (Loop Start PBX Flash Open Signal)

Description: The **LS_PBX_FlashOpen** parameter defines the T-1 loop start PBX Open CAS transition signal to use when flash hook transfer is enabled. This signal is sent to drop a call.

Values: 0xC15CA029

LS_PBX_Close (Loop Start PBX Close Signal)

Description: The **LS_PBX_Close** parameter defines the T-1 loop start PBX Close CAS transition signal ID. This signal is sent to make an outbound call, or to answer an incoming call.

Values: 0xC15CA022

LS_PBX_Flash (Loop Start PBX Flash Signal)

Description: The **LS_PBX_Flash** parameter defines the T-1 loop start PBX flash CAS pulse signal ID. This signal is used to initiate a blind transfer while the call is connected.

Values: 0xC15CA031

LS_Net_Answer (Loop Start Net Answer Signal)

Description: The **LS_Net_Answer** parameter defines the T-1 loop start Net Answer CAS transition signal ID. Receiving this signal indicates that the network has answered an outbound call.

Values: 0xC15CA023

LS_Net_Drop (Loop Start Net Drop Signal)

Description: The **LS_Net_Drop** parameter defines the T-1 loop start Net Drop CAS transition signal ID. Receiving this signal indicates that the network has dropped the call.

Values: 0xC15CA024

LS_Net_FlashDrop (Loop Start Net Flash Drop Signal)

Description: The **LS_Net_FlashDrop** parameter defines the T-1 loop start Net Drop CAS transition signal to use when flash hook transfer is enabled. Receiving this signal indicates that the network has dropped the call.

Values: 0xC15CA02A

LS_Net_Abandon (Loop Start Net Abandon)

Description: The **LS_Net_Abandon** parameter defines the T-1 loop start Net Abandon CAS transition signal ID. Receiving this signal indicates that the network has dropped an offered call, that is, ringing has stopped.

Values: 0xC15CA025

LS_Net_RingOn (Loop Start Net Ring On Signal)

Description: The **LS_Net_RingOn** parameter defines the T-1 loop start Net Ring On CAS transition signal ID. Receiving this signal indicates that the network is ringing the line, and an inbound call is offered. This is the leading edge of the ring.

Values: 0xC15CA026

LS_Net_RingOff (Loop Start Net Ring Off)

Description: The **LS_Net_RingOff** parameter defines the T-1 loop start Net Ring Off CAS transition signal ID. Receiving this signal indicates that the network is “ringing” the line, and an inbound call is offered. This is the trailing edge of the ring.

Values: 0xC15CA027

GS_PBX_Ground (Ground Start PBX Ground Signal)

Description: The **GS_PBX_Ground** parameter defines the T-1 ground start PBX Ground CAS transition signal ID. This signal is sent by the station to make an outbound call, or to answer an incoming call (off-hook). From the station side, it is the GS-FXS transmitting a generic seize, and from the corresponding office or network side, it is the GS-FXO receiving a generic seize.

Values: 0xC15CA041

GS_PBX_Answer (Ground Start PBX Answer Signal)

Description: The **GS_PBX_Answer** parameter defines the T-1 ground start PBX Answer CAS transition signal ID. This signal is sent by the station (GS-FXS) when an inbound call is answered.

Values: 0xC15CA042

GS_PBX_Release (Ground Start PBX Release Signal)

Description: The **GS_PBX_Release** parameter defines the T-1 ground start PBX Release CAS transition signal ID. This signal is sent by the station (GS-FXS) to release an outbound call.

Values: 0xC15CA043

GS_PBX_Drop (Ground Start PBX Drop Signal)

Description: The **GS_PBX_Drop** parameter defines the T-1 ground start PBX Drop CAS transition signal ID. This signal is used by the station (GS-FXS) to know that the network (GS-FXO) has dropped the call. The network generates a GS_Net_Drop signal.

Values: 0xC15CA044

GS_PBX_FlashDrop (Ground Start PBX Flash Drop Signal)

Description: The **GS_PBX_FlashDrop** parameter defines the T-1 ground start PBX Drop CAS transition signal ID. This signal is sent to drop a call when flash hook transfer is enabled.

Values: 0xC15CA049

GS_PBX_Flash (Ground Start PBX Flash Signal)

Description: The **GS_PBX_Flash** parameter defines the T-1 ground start PBX flash CAS pulse signal ID. This signal is used by the station to initiate a blind transfer while the call is connected.

Values: 0xC15CA051

GS_Net_Ground (Ground Start Net Ground Signal)

Description: The **GS_Net_Ground** parameter defines the T-1 ground start Net Ground CAS transition signal ID. Receiving this signal indicates that the network has answered an outbound call, or that the network is offering an inbound call.

Values: 0xC15CA045

GS_Net_Drop (Ground Start Net Drop Signal)

Description: The **GS_Net_Drop** parameter defines the T-1 loop start Net Drop CAS transition signal ID. Receiving this signal indicates that the network has dropped the call.

Values: 0xC15CA046

GS_Net_FlashDrop (Ground Start Flash Drop Signal)

Description: The **GS_Net_FlashDrop** parameter defines the T-1 ground start Net Drop CAS transition signal to use when flash hook transfer is enabled. Receiving this signal indicates that the network has dropped the call.

Values: 0xC15CA04A

GS_Net_RingOn (Ground Start Net Ring On Signal)

Description: The **GS_Net_RingOn** parameter defines the T-1 ground start Net Ring On CAS transition signal ID. Receiving this signal indicates that the network (GS-FXO) is “ringing” the line, and an inbound call is offered to the station (GS-FXS). This is the leading edge of the ring.

Values: 0xC15CA047

GS_Net_RingOff (Ground Start Net Ring Off Signal)

Description: The **GS_Net_RingOff** parameter defines the T-1 ground start Net Ring Off CAS transition signal ID. The signal generated by the network (GS-FXO) to stop the “ring” on a line when a call is offered to the station (GS_FSO). This is the trailing edge of the ring.

Values: 0xC15CA048

6.21 [CHP] ISDN Protocol Variant Definitions

The CHP parameters define line configurations. Within the [CHP] section of the CONFIG file, ISDN protocol variants are defined using the `Variant Define n` command. For a detailed description of the `Variant Define n` command, see [Section 3.6, “\[CHP\] Section”](#), on page 43.

The ISDN protocol variant parameters include:

- [ProtocolType](#) (Protocol Type)
- [InterCallDelay](#) (Inter-call Delay)
- [DisconnectTimeout](#) (Disconnect Timeout)
- [Layer1Protocol](#) (Layer 1 Protocol)
- [InfoTransferRate](#) (Information Transfer Rate)
- [InfoTransferCap](#) (Information Transfer Cap)
- [CalledNumberType](#) (Called Number Type)
- [CalledNumberPlan](#) (Called Number Plan)
- [CalledNumberCount](#) (Called Number Count)
- [CallingNumberType](#) (Calling Number Type)
- [CallingNumberPlan](#) (Calling Number Plan)
- [CallingNumberPresentation](#) (Calling Number Presentation)
- [CallingNumberScreening](#) (Calling Number Screening)
- [CallingNumberCount](#) (Calling Number Count)
- [CallProgress](#) (Call Progress)
- [CaHdgLoHiGl](#) (Hello Edge/Low Glitch/High Glitch)
- [CaAnsdglPSV](#) (Answer Deglitcher/PAMD Speed Value)
- [CaHdgLoHiGl](#) (Hello Edge/Low Glitch/High Glitch)
- [CaBusySet](#) (Busy Signal)
- [CaSitSet](#) (SIT Signal)

- [CaFaxSet](#) (Fax Signal)
- [CaPvdId](#) (Voice Detection Signal)
- [CaPamdId](#) (Answering Machine Signal)
- [CaSignalTimeout](#) (Signal Timeout)
- [CaAnswerTimeout](#) (Answer Timeout)
- [CaPvdTimeout](#) (Voice Detection Timeout)

ProtocolType (Protocol Type)

Description: The **ProtocolType** parameter defines the type of ISDN protocol used on a channel. The value of the parameter is dependent on the firmware being downloaded and the CONFIG files used. For example, when downloading the *ml2_qsa_4ess.config* file, **ProtocolType** should be set to a value of 1.

Note: The **ProtocolType** parameter is also used when defining T-1 protocol variants.

Values:

- 1: 4ESS and NI-2
- 2: 5ESS
- 3: DMS100 and DMS 250
- 4: NTT
- 7: NET5 and QSIG

InterCallDelay (Inter-call Delay)

Description: The **InterCallDelay** parameter defines the minimum amount of time between outbound calls.

Note: The **InterCallDelay** parameter is also used when defining T-1 protocol variants.

Values: $n > 0$ (milliseconds)

DisconnectTimeout (Disconnect Timeout)

Description: The **DisconnectTimeout** parameter defines the time delay between proceeding and alert/connect. The call will transition to idle after this time period (sooner if ClearConf is received).

Note: The **DisconnectTimeout** parameter is also used when defining T-1 protocol variants.

Values: $n > 0$ (milliseconds)

Guidelines: For DNM160TEC and DMT160TEC boards, when there are 16 or more trunks in one NFAS group and calls are made on every channel at a very fast rate, the firmware may start missing calls. In this case, increase the value of the **DisconnectTimeout** parameter to at least 3000 milliseconds.

Layer1Protocol (Layer 1 Protocol)

Description: The **Layer1Protocol** parameter defines the User Layer 1 Protocol.

Values:

- 0x00: Protocol not present
- 0x01: CCITT
- 0x02: G.711 mu-law
- 0x03: G.711 A-law
- 0x04: G.721 ADPCM
- 0x05: G.721 kHz
- 0x06: 384 kHz Video
- 0x07: NS Rate Adaption
- 0x08: V120 Rate Adaption
- 0x09: X.31 HDLC

InfoTransferRate (Information Transfer Rate)

Description: The **InfoTransferRate** parameter defines the information transfer rate.

Values:

- 0x00: Rate undefined
- 0x10: 64 kbps
- 0x11: 128 kbps
- 0x13: 384 kbps
- 0x15: 1536 kbps
- 0x17: 1920 kbps
- 0x18: Multi-rate

InfoTransferCap (Information Transfer Cap)

Description: The **InfoTransferCap** parameter defines the information transfer capability.

Values:

- 0x00: Speech
- 0x08: Unrestricted digital
- 0x09: Restricted digital
- 0x10: 3 kHz
- 0x11: 7 kHz
- 0x18: Video

CalledNumberType (Called Number Type)

Description: The **CalledNumberType** parameter defines the type of outbound calls (Called Party Numbers).

Values:

- 0x00: Unknown
- 0x01: International
- 0x02: National
- 0x03: Network specific
- 0x04: Network subscriber
- 0x06: Network abbreviated

CalledNumberPlan (Called Number Plan)

Description: The **CalledNumberPlan** parameter defines the numbering plan to use for outbound calls (Called Party Numbers).

Values:

- 0x00: Unknown
- 0x01: ISDN
- 0x02: Telephony
- 0x03: Date X.121
- 0x04: Telex F.69
- 0x08: National standard
- 0x09: Private

CalledNumberCount (Called Number Count)

Description: The **CalledNumberCount** parameter defines the number of digits to collect from an incoming call.

Values:

- 0: Collect all the digits provided
- n: Number of digits to collect

CallingNumberType (Calling Number Type)

Description: The **CallingNumberType** parameter defines the type of outbound call (Calling Party Number).

Values:

- 0x00: Unknown
- 0x01: International
- 0x02: National
- 0x03: Network specific
- 0x04: Network subscriber
- 0x06: Network abbreviated

CallingNumberPlan (Calling Number Plan)

Description: The **CallingNumberPlan** parameter defines the numbering plan to use for outbound calls (Calling Party Numbers).

Values:

- 0x00: Unknown
- 0x01: ISDN
- 0x02: Telephony
- 0x03: Date X.121
- 0x04: Telex F.69
- 0x08: National standard
- 0x09: Private

CallingNumberPresentation (Calling Number Presentation)

Description: The **CallingNumberPresentation** parameter defines the presentation for calling number (outbound calls).

Values:

- 0x00: Allowed
- 0x01: Restricted
- 0x02: Not available

CallingNumberScreening (Calling Number Screening)

Description: The **CallingNumberScreening** parameter defines the screening for calling number (outbound calls).

Values:

- 0x00: User provided
- 0x01: Verified and passed
- 0x02: Verified and failed
- 0x03: Network provided

CallingNumberCount (Calling Number Count)

Description: The **CallingNumberCount** parameter defines the number of Calling Party Number digits to collect from incoming call.

Values:

- 0: Collect all the digits provided
- n: Number of digits to collect

CallProgress (Call Progress)

Description: The **CallProgress** parameter enables or disables call progress detection for call setup.

Note: The **CallProgress** parameter is also used when defining T-1 protocol variants.

Values:

- y: Enable call progress detection
- n: Disable call progress detection

CaHdgLoHiGl (Hello Edge/Low Glitch/High Glitch)

The **CaHdgLoHiGl** parameter combines three parameters into one. They include the Hello Edge, Low Glitch, and High Glitch parameters. The values for all three parameters are contained in the **CaHdgLoHiGl** parameter value, 0xFF020F13, where 02 is the default hexadecimal value (2 decimal) for the Hello Edge parameter, 0F is the default hexadecimal value (15 decimal) for the Low Glitch parameter, and 13 is the hexadecimal value (19 decimal) for the High Glitch parameter.

Description: The **Hello Edge** parameter defines the point at which a connect will be returned to the application.

Values:

- 1: Rising edge (immediately when a connect is detected)
- 2: Falling edge (after the end of the salutation)

Description: The **Low Glitch** parameter defines, in intervals of 10 milliseconds, the maximum silence period to ignore. This maximum silence period helps to eliminate spurious silence intervals.

Values: The default value is 15 decimal (150 milliseconds).

Description: The **High Glitch** parameter defines, in intervals of 10 milliseconds, the maximum nonsilence period to ignore. This maximum nonsilence period helps to eliminate spurious nonsilence intervals.

Values: The default value is 19 decimal (190 milliseconds).

CaAnsdgIPSV (Answer Deglitcher/PAMD Speed Value)

The **CaAnsdgIPSV** parameter combines two parameters into one. They include the Answer Deglitcher and PAMD Speed Value parameters. The values for both parameters are contained in

the **CaAnsdlPSV** parameter value, 0xFFFFF01, where 01 is the default hexadecimal value (1 decimal) for the PAMD Speed Value parameter and FF is the default hexadecimal value (-1 decimal) for the Answer Deglitcher parameter, which corresponds to disabling it. This parameter should only be enabled if you are concerned with measuring the length of the salutation.

Description: The **Answer Deglitcher** parameter defines the maximum silence period, in 10 millisecond intervals, allowed between words in a salutation.

Values: The default value is -1 (FFFF), for disabled.

Description: The **PAMD Speed Value** parameter defines the PAMD algorithm: PAMD_ACCU, PAMD_FULL, and PAMD_QUICK. PAMD_QUICK provides the fastest results based on the connect circumstances, but is the least accurate. PAMD_FULL performs hiss noise analysis to determine if this is an answer machine response, and then performs a full evaluation of the voice response if the hiss information is not sufficient to make the decision. PAMD_ACCU will not perform hiss noise analysis, since this is not required with today's digital answering systems, but will perform a full answer size voice response to achieve the most accurate result.

Values:

- 1 [default]: PAMD_ACCU
- 2: PAMD_FULL
- 3: PAMD_QUICK

CaRingingSet (Ringing Signal)

Description: The **CaRingingSet** parameter defines the signal set used to detect ringing for call progress analysis.

Note: The **CaRingingSet** parameter is also used when defining T-1 protocol variants.

Values: 0x024940

CaBusySet (Busy Signal)

Description: The **CaBusySet** parameter defines the signal set used to detect busy for call progress analysis.

Note: The **CaBusySet** parameter is also used when defining T-1 protocol variants.

Values: 0x004DE0

CaSitSet (SIT Signal)

Description: The **CaSiteSet** parameter defines the signal set used to detect Standard Information Tones (SIT) tones for call progress analysis.

Note: The **CaSiteSet** parameter is also used when defining T-1 protocol variants.

Values: 0x02F240

CaFaxSet (Fax Signal)

Description: The **CaFaxSet** parameter defines the signal set used to detect fax tones for call progress analysis.

Note: The **CaFaxSet** parameter is also used when defining T-1 protocol variants.

Values: 0x014B80

CaPvdId (Voice Detection Signal)

Description: The **CaPvdId** parameter defines the signal to use for positive voice detection in call progress analysis.

Note: The **CaPvdId** parameter is also used when defining T-1 protocol variants.

Values: 0x01F4C1

CaPamdId (Answering Machine Signal)

Description: The **CaPamdId** parameter defines the signal to use for positive answering machine detection in call progress analysis.

Note: The **CaPamdId** parameter is also used when defining T-1 protocol variants.

Values: 0x01A041

CaSignalTimeout (Signal Timeout)

Description: The **CaSignalTimeout** parameter defines the maximum amount of time to wait to detect a call progress tone from one of the call analysis signal sets. For T1 loop start and ground start protocols, if this time is exceeded, then the outbound call will fail with the reason being NoAnswer.

Note: The **CaSignalTimeout** parameter is also used when defining T-1 protocol variants.

Values: $n > 0$ (the value must be a multiple of 10 ms)

CaAnswerTimeout (Answer Timeout)

Description: The **CaAnswerTimeout** parameter defines the maximum amount of time that call analysis will wait for ringback to stop (equivalent to the number of rings). If this time is exceeded, then the outbound call will fail with the reason being NoAnswer.

Note: The **CaAnswerTimeout** parameter is also used when defining T-1 protocol variants.

Values: $n > 0$ (the value must be a multiple of 10 ms)

CaPvdTimeout (Voice Detection Timeout)

Description: The **CaPvdTimeout** parameter defines the maximum amount of time that call analysis will wait to detect positive answering machine detection (PAMD) or positive voice detection (PVD) once ringback has ceased. If this time is exceeded, then the call state will

transition to “Connected” with the reason being Normal. If PAMD or PVD is detected within this time period, then the “Connected” reason will be PAMD or PVD respectively.

Note: The **CaPvdTimeout** parameter is also used when defining T-1 protocol variants.

Values: $n > 0$ (the value is expressed in multiples of 10 milliseconds. For example, a value of 200 equals 2000 milliseconds, or 2 seconds)

- For analog boards: default = 800
- For digital boards: default = 400

6.22 [CHP] Analog Voice Variant Definitions

The CHP analog voice variant parameters apply to the DM3 analog voice boards. The **Tone_SigId4** variant is used to enable forced disconnect. The forced disconnect is a method used to signal the local side of a call that the remote side has disconnected. This is done via a tone that is generated by the central office or PBX on the local side. This tone can be a dial tone or a form of busy tone (regular busy or fast busy).

SigId4 (Signal ID 4)

Description: The **SigId4** parameter is used to enable a forced disconnect by enabling disconnect tone supervision. To enable forced disconnect, comment out the value 0x0 by inserting an exclamation symbol (!) at the beginning of the line containing the 0x0 value in the CONFIG file and uncommenting the line containing the value 238113 by deleting the exclamation symbol from the beginning of the line. See the following example:

```
!Variant Tone_SigId4      0x0      ! Don't Enable Disconnect Tone Supervision
Variant Tone_SigId4      238113    ! Enable disconnect tone supervision.
```

Values:

- 0x0: Disable disconnect tone supervision
- 238113: Enable disconnect tone supervision

6.23 [TSC] Parameters

The parameter in the [TSC] section of the CONFIG file is associated with the B channel sets.

Encoding (Encoding Method)

Number: 0x1209

Description: The **Encoding** parameter defines the encoding method used on a line.

Values:

- 1: A-law
- 2: mu-law

6.24 [TSC] defineBSet Parameters

The parameters defined by the `defineBSet` command in the [TSC] section of the CONFIG file are associated with the B channel sets. The syntax of the `defineBSet` command is:

```
defineBSet = SetId, LineId, StartChan, NumChans, BaseProtocol, Inbound, OutBound, DChanDesc,
Admin, Width, BChanId, SlotId, Direction, Count, [BChanId, SlotId, Direction, Count,] 0
```

Note: The [TSC] `defineBSet` parameters do not have parameter numbers explicitly defined within the CONFIG file.

The `defineBSet` parameters include:

- [SetId \(Set Identifier\)](#)
- [LineId \(Line Identifier\)](#)
- [StartChan \(Start Channel\)](#)
- [NumChans \(Number of B Channels\)](#)
- [BaseProtocol \(Base Protocol\)](#)
- [Inbound \(Inbound Variant\)](#)
- [Outbound \(Outbound Variant\)](#)
- [DChanDesc \(D Channel Descriptor\)](#)
- [Admin \(Admin\)](#)
- [Width \(Width\)](#)
- [BChanId \(B Channel Identifier\)](#)
- [SlotId \(Slot Identifier\)](#)
- [Direction \(Direction\)](#)
- [Count \(Count\)](#)

SetId (Set Identifier)

Description: The **SetId** parameter is an arbitrary identifier set by the user that identifies the B channel set in which the B channels are a member.

Values: Number

Guidelines: Each B channel set must have a unique identifier.

For example, for each line on a board, **SetId** can be set sequentially to a value that is a multiple of 10 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,2,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,3,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,4,20,1, 1,1,3,23,0
```

LineId (Line Identifier)

Description: The **LineId** parameter defines the T1 or E1 line that carries all of the B channels in the set.

Values: 1 to 16

Guidelines: For example, on a board with four network interfaces, the value of **LineId** is set to 1 for line 1, 2 for line 2, and so on for each line as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

StartChan (Start Channel)

Description: The **StartChan** parameter defines the first B channel in the set. This parameter is used in combination with the **NumChans** parameter to define a contiguous set of B channels.

Values: The value range depends on the technology, because the number of available B channels varies.

- 1 to 24: T1
- 1 to 30: E1
- 1 to 31: E1 clear channel

Guidelines: For example, on a T-1 line where 23 of the 24 channels are used as B channels, the value of **StartChan** is set to 1 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

NumChans (Number of B Channels)

Description: The **NumChans** parameter defines the total number of B channels in the set. This parameter is used in combination with the **StartChan** parameter to define a contiguous set of B channels.

Values: The range of values varies with technology because the number of time slots varies.

- 1 to 24: T1
- 1 to 30: E1
- 1 to 31: E1 clear channel

Guidelines: For example, on a T-1 line, a value of 1 for **StartChan** and a value of 23 for **NumChans** defines 23 B channels numbered from 1 to 23:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,2,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,3,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,4,20,1, 1,1,3,23,0
```

BaseProtocol (Base Protocol)

Description: The **BaseProtocol** parameter defines the base protocol on which the B channel set will run.

Values:

- 0: T-1 CAS, ISDN or Global Call protocols (where the default protocol is defined by the firmware) or clear channel
- 7: Circa Analog - Supports Circa L feature phones (Dialogic Integrated Series boards)

Guidelines: For T-1 CAS, ISDN, and Global Call protocols, each firmware load supports only one base protocol, so this parameter will be set to 0 for these protocols. This parameter is also set to 0 for clear channel. Clear channel is the ability to access telephony channels in the system and configure them to a user defined call control protocol, or to simply leave the lines “clear”. The resources should have access to the telephony bus for media routing purposes, as well as signal detection, signal generation, and tone generation capabilities, if desired.

For example, on T-1 ISDN lines, **BaseProtocol** is set to a value of 0 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

Inbound (Inbound Variant)

Description: The **Inbound** parameter selects one of the protocol type variant parameter sets defined in the [CHP] section of the CONFIG file to use for inbound calls. The protocol variant defines the type of protocol running on the set of B channels.

Values:

- 0: Clear channel (disable inbound calls)
- n: Variant identifier as defined in the [CHP] section of the CONFIG file

Guidelines: This parameter is set to 0 for clear channel. Clear channel is the ability to access telephony channels in the system and configure them to a user defined call control protocol, or to simply leave the lines “clear”. The resources should have access to the telephony bus for media routing purposes, as well as signal detection, signal generation, and tone generation capabilities, if desired.

For example, on T-1 ISDN lines, **Inbound** is set to a value of 1 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

Outbound (Outbound Variant)

Description: The **Outbound** parameter selects one of the protocol type variant parameter sets defined in the [CHP] section of the CONFIG file to use for outbound calls. The protocol variant defines the type of protocol running on the set of B channels.

Values:

- 0: Clear channels (disable outbound calls)
- n: Variant identifier as defined in the [CHP] section of the CONFIG file

Guidelines: This parameter is set to 0 for clear channel (disable outbound calls). Clear channel is the ability to access telephony channels in the system and configure them to a user defined call control protocol, or to simply leave the lines “clear”. The resources should have access to the telephony bus for media routing purposes, as well as signal detection, signal generation, and tone generation capabilities, if desired.

For example, on T-1 ISDN lines, **Outbound** is set to a value of 1 as follows:

```
defineBSet=10,1,1,23, 0,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,20,1, 1,1,3,23,0
```

DChanDesc (D Channel Descriptor)

Description: The **DChanDesc** parameter is an ISDN parameter that shows on which trunk the D-channel resides for this B-set. This parameter is ignored for T-1 CAS, clear channel, and Global Call protocols.

Values: 1 to 16

Guidelines: For example, on a board with four T-1 ISDN lines, **DChanDesc** is set as follows:

```
defineBSet=10,1,1,24, 0,1,1,20,1, 1,1,3,24,0
defineBSet=20,2,1,24, 0,1,1,2,20,1, 1,1,3,24,0
defineBSet=30,3,1,24, 0,1,1,3,20,1, 1,1,3,24,0
defineBSet=40,4,1,24, 0,1,1,4,20,1, 1,1,3,24,0
```

Admin (Admin)

Description: The **Admin** parameter is an arbitrary 32-bit value set by the user that is exported to the TSC_AttrAdminGroup attribute of the TSC cluster for each B channel in the set. This attribute can be used to find and/or allocate TSC clusters.

Values: 0 to 0xFFFFFFFF

Guidelines: For example, on a T1 line, **Admin** is set to a value of 20 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

Width (Width)

Description: The **Width** parameter specifies the number of time slots used by each B channel. Currently, only one time slot per channel is used.

Note: This **Width** should not be modified by the user.

Values: 1

Guidelines: For example, on a T1 line, **Width** is set to a value of 1 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

BChanId (B Channel Identifier)

Description: The **BChanId** parameter defines the initial B channel in the set to which the TSC instance is associated. It is also the channel to which the initial time slot, defined by **SlotId**, will be mapped. B channels are then sequentially mapped to time slots for a count of **Count**.

Values: The range of values varies with technology because the number of time slots varies.

- 1 to 24: T1
- 1 to 31: E1

Guidelines: For example, on a T-1 board where the D channel is mapped to time slot 24 on all four lines, **BChanId** and **SlotId** are set to a value of 1 and **NumChans** is set to a value of 23. This defines 23 B channels numbered 1 to 23 mapped to time slots 1 to 23.

```
defineBSet=10,1,1,23,0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23,0,1,1,1,20,1, 1,1,3,23,0
defineBSet=30,3,1,23,0,1,1,1,20,1, 1,1,3,23,0
defineBSet=40,4,1,23,0,1,1,1,20,1, 1,1,3,23,0
```

For E-1 ISDN lines that usually contain a D channel mapped to time slot 16, the mapping of channels to time slots occurs in two sets of **BChanId**, **SlotId**, **Direction** and **Count** definitions. The first set of definitions maps time slots before the D channel and the second set maps time slots after the D channel.

For example, on an E-1 ISDN board with four network interfaces, where time slot 16 is used for signaling on all four lines, **BChanId** would be defined on each line as follows:

```
defineBSet=10,1,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=20,2,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=30,3,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=40,4,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
```

In this example, channels 1 to 15 are mapped to time slots 1 to 15 and channels 16 to 30 are mapped to time slots 17 to 31.

For E-1 clear channel lines where the time slot 16 is not used for signaling, additional **defineBSet** commands are added to clear channel 31. Both **StartChan** and **BChanId** are set to a value of 31, **NumChans** and **Count** are set to a value of 1, and **SlotId** is set to 16 as follows:

```
defineBSet=50,1,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=60,2,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=70,3,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=80,4,31,1, 0,0,0,1,21,1, 31,16,3,1,0
```

SlotId (Slot Identifier)

Description: The **SlotId** parameter defines the logical time slot the initial B channel, defined by **BChanId**, is using. B channels are then sequentially mapped to time slots for a count of **Count**.

Values: The range of values varies with technology because the number of time slots varies.

- 1 to 24: T1
- 1 to 31: E1 ISDN
- 1 to 31: E1 clear channel

Guidelines: For E-1 ISDN, the mapping of channels to time slots occurs in two sets of **BChanId**, **SlotId**, **Direction** and **Count** definitions. The first set of definitions maps the time slots before the D channel, and the second set maps the slots after the D channel.

For example, on an E-1 ISDN board with four network interfaces, where time slot 16 is used for signaling on all four lines, **SlotId** for all four lines would be as follows

```
defineBSet=10,1,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=20,2,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=30,3,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=40,4,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
```

For all lines in this example, channels 1 to 15 are sequentially mapped to time slots 1 to 15 and channels 16 to 30 are mapped to time slots 17 to 31.

For E-1 clear channel lines where time slot 16 is not used for signaling, additional `defineBSet` commands are added to clear channel 31 and to map time slot 16. Both **StartChan** and **BChanId** are set to a value of 31, **NumChans** and **Count** are set to a value of 1, and **SlotId** is set to 16 as follows:

```
defineBSet=50,1,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=60,2,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=70,3,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=80,4,31,1, 0,0,0,1,21,1, 31,16,3,1,0
```

Direction (Direction)

Description: The **Direction** parameter defines the direction in which the data can be sent: inbound, outbound, or both.

Values:

- 1: Inbound
- 2: Outbound
- 3: Both

Guidelines: For example, on an T-1 line where data is transferred both inbound and outbound, **Direction** is set to a value of 3 as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,2,20,1, 1,1,3,23,0
defineBSet=30,3,1,23, 0,1,1,3,20,1, 1,1,3,23,0
defineBSet=40,4,1,23, 0,1,1,4,20,1, 1,1,3,23,0
```

Count (Count)

Description: The **Count** parameter defines the number of time slots that are being mapped to B channels. This value is limited to the value of **NumChans** since only the number of channels that exist on a line can be mapped to a time slots.

Values: 1 to **NumChans**

Guidelines: For example, on a T-1 line containing two network interfaces, where time slot 24 is used as a D channel on both lines, the **Count** for both lines would be as follows:

```
defineBSet=10,1,1,23, 0,1,1,1,20,1, 1,1,3,23,0
defineBSet=20,2,1,23, 0,1,1,1,20,1, 1,1,3,23,0
```

For an E-1 line, **Count** is set to a value of 30 for lines that contain only B channels. For lines that contain a single D channel, the mapping of channels to time slots occurs in two sets of **BChanId**, **SlotId**, **Direction** and **Count** definitions. The first set of definitions maps the time slots before the D channel, and the second set maps the slots after the D channel. For example, on an E-1 board with four network interfaces, where time slot 16 is used for signaling on all four lines, the **Count** for all four lines would be as follows:

```
defineBSet=10,1,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=20,2,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=30,3,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
defineBSet=40,4,1,30, 0,1,1,1,20,1, 1,1,3,15, 16,17,3,15,0
```

For all lines in this example, channels 1 to 15 are mapped to time slots 1 to 15 and channels 16 to 30 are mapped to time slots 17 to 31.

For E-1 clear channel lines where the time slot 16 is not used for signaling, additional **defineBSet** commands are added to clear channel 31 and to map time slot 16. **Count** is set to a value of 1 (also the value of **NumChans**) as follows:

```
defineBSet=50,1,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=60,2,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=70,3,31,1, 0,0,0,1,21,1, 31,16,3,1,0
defineBSet=80,4,31,1, 0,0,0,1,21,1, 31,16,3,1,0
```

6.24.1 Gain Parameters

The Gain parameters define the transmit and receive gain for the DMV160LP Series (DMV160LP and DMV160LPHIZ), DI Series Station Interface (DI/408-LS-A-R2 and DI/SI32-R2), and the High Density Station Interface boards. The Gain parameters include:

- [Tx Gain Min](#)
- [Tx Gain Max](#)
- [Tx Base Gain](#)
- [Tx Gain](#)
- [Rx Gain Min](#)
- [Rx Gain Max](#)
- [Rx Base Gain](#)
- [Rx Gain](#)

Tx Gain Min

Number: 0x120F

Description: The **Tx Gain Min** parameter defines the minimum gain toward the station or trunk transmitting from the CT Bus.

Values: -31 dB (This is the default value for all boards except the HDSI series, which is -9 dB.)

Guidelines: For best results, the value should not be changed from the default.

Tx Gain Max

Number: 0x1210

Description: The **Tx Gain Max** parameter defines the maximum gain toward the station or trunk transmitting from the CT Bus.

Values: + 31 dB (This is the default value for all boards except the HDSI series, which is +3 dB.)

Guidelines: For best results, the value should not be changed from the default.

Tx Base Gain

Number: 0x120C

Values: +3 dB for DMV160LP Series and DI/0408-LS-A-R2 trunks; -3 dB for all DI/SI32-R2 variants and DI/0408-LS-A-R2 stations

Guidelines: The Tx Base Gain and Tx Gain parameters should be set to the same value.

Tx Gain

Number: 0x120D

Description: The **Tx Gain** parameter defines the gain toward the station or trunk transmitting from the CT Bus.

Values: +3 dB for DMV160LP Series and DI/0408-LS-A-R2 trunks; -3 dB for all DI/SI32-R2 variants and DI/0408-LS-A-R2 stations

Guidelines: The Tx Gain and Tx Base Gain parameters should be set to the same value.

Rx Gain Min

Number: 0x121B

Description: The **Rx Gain Min** parameter defines the minimum gain away from the station or trunk received by the CT Bus.

Values: -31 dB (This is the default value for all boards except the HDSI series, which is -9 dB.)

Guidelines: For best results, the value should not be changed from the default.

Rx Gain Max

Number: 0x121C

Description: The **Rx Gain Max** parameter defines the maximum gain away from the station or trunk received by the CT Bus.

Values: +31 dB (This is the default value for all boards except the HDSI series, which is +3 dB.)

Guidelines: For best results, the value should not be changed from the default.

Rx Base Gain

Number: 0x1218

Values: +3 dB for DMV160LP Series and DI/0408-LS-A-R2 trunks; -3 dB for all DI/SI32-R2 variants and DI/0408-LS-A-R2 stations

Guidelines: The Rx Base Gain and Rx Gain parameters should be set to the same value.

Rx Gain

Number: 0x1219

Description: The **Rx Gain** Parameter defines the gain away from the station or trunk received by the CT Bus.

Values: +3 dB for DMV160LP Series and DI/0408-LS-A-R2 trunks; -3 dB for all DI/SI32-R2 variants and DI/0408-LS-A-R2 stations

Guidelines: The Rx Gain and Rx Base Gain parameters should be set to the same value.

6.25 [0x1b] Parameters

The [0x1b] section only appears in CONFIG files that are associated with DM/IP boards. The following parameters only apply to DM/IP boards:

- [PrmAGCActive](#) (AGC Enable)
- [PrmAGCnf_attfast](#) (Fast Attack Filter Coefficient)
- [PrmAGCnf_attslow](#) (Slow Attack Filter Coefficient)
- [PrmAGCgain_inc_speech](#) (Gain Inc Value)
- [PrmAGCmax_gain](#) (Maximum Gain Limit)
- [PrmAGCMEM_max_size](#) (Maximum Memory Size)
- [PrmAGCMEM_sil_reset](#) (Memory Size Reset)
- [PrmAGClow_threshold](#) (Noise Floor Estimate)
- [PrmAGCk](#) (Target Output Level)
- [PrmCEDCadence](#) (CED Cadence)
- [PrmCNGCadenceMin](#) (CNG Minimum Cadence)
- [PrmCNGCadenceMax](#) (CNG Maximum Cadence)

- PrmCNGCadenceSilence (CNG Silence)
- PrmDTMFGainCtrl (DTMF Gain Control)
- PrmDTMFVolCtrl (DTMF Volume Control)
- PrmDTMFDurationDflt (DTMF On Time)
- PrmDTMFOffTimeDflt (DTMF Off Time)
- PrmDTMFXferMode (DTMF Transmission Mode)
- PrmECAActive (Echo Cancellation)
- PrmECOrder (Number of Taps)
- PrmECNLPAActive (NLP Enable)
- PrmECMu (Convergence Rate)
- PrmECResSpFlagEnableDisable (Residual Speech Flag)
- PrmECSuppressGain (Suppress Gain)
- PrmGainCtrl (Gain Control)
- PrmVolCtrl (Volume Control)
- PrmOptLatPktsTx (PLR Optimal Latency)
- PrmMaxLatPktsTx (PLR Maximum Latency)
- PrmRedDepth (Redundancy)
- PrmFaxEnable (Fax Enable)
- PrmT38ECOverride (ECM Override)
- PrmT38DFOVERRIDE (Limit Image Encoding Method)
- PrmT38BROVERRIDE (Limit Modulation and Bit Rates)
- PrmT38TCFThreshld (Local Training Maximum Error Tolerance)
- PrmT38IndSecBlocks (Fax IND Redundancy Factor)
- PrmT38V21SecBlocks (Fax V21 Redundancy Factor)
- PrmT38HSECMSecBlocks (Fax HSECM Redundancy Factor)
- T38HSSecBlocks (Fax HS Redundancy Factor)
- PrmT38HSEOFSecBlocks (Fax HSEOF Redundancy Factor)
- PrmT38HSEOTSecBlocks (Fax HSEOT Redundancy Factor)
- PrmT38TxThreshld (Transmit Hold Back Threshold)
- PrmT38TCFMethod (Local or End-to-End Training)
- PrmT38TxPower (Transmit Power Level)
- PrmT38SpoofLevel (Spoofing Level)
- PrmHPFActive (HPF Enable)

PrmAGCActive (AGC Enable)

Number: 0x1b1c

Description: The **PrmAGCActive** parameter allows you to enable or disable the automatic gain control (AGC) of the DM/IP. The AGC maintains a uniform signal power level as the signal is retrieved from the bus.

Values:

- 0: Disable AGC
- 1: Enable AGC

PrmAGCnf_attfast (Fast Attack Filter Coefficient)

Number: 0x1b61

Description: The **PrmAGCnf_attfast** parameter sets the noise floor fast attack filter coefficient.

Values: 0 to 0xFFFFFFFF

PrmAGCnf_attslow (Slow Attack Filter Coefficient)

Number: 0x1b62

Description: The **PrmAGCnf_attslow** parameter sets the noise floor slow attack filter coefficient.

Values: 0 to 0xFFFFFFFF

PrmAGCgain_inc_speech (Gain Inc Value)

Number: 0x1b60

Description: The **PrmAGCgain_inc_speech** parameter sets the maximum attack rate.

Values: 0 to 0xFFFFFFFF

PrmAGCmax_gain (Maximum Gain Limit)

Number: 0x1b5e

Description: The **PrmAGCmax_gain** parameter defines the limit of maximum gain allowed.

Values: 0 to 0xFFFFFFFF

PrmAGCMEM_max_size (Maximum Memory Size)

Number: 0x1b64

Description: The **PrmAGCMEM_max_size** parameter sets the maximum memory size.

Note: This parameter should not be adjusted.

PrmAGCMEM_sil_reset (Memory Size Reset)

Number: 0x1b63

Description: The **PrmAGCMEM_sil_reset** parameter sets the memory size reset during silence.

Note: This parameter should not be adjusted.

PrmAGClow_threshold (Noise Floor Estimate)

Number: 0x1b5d

Description: The **PrmAGClow_threshold** parameter sets the upper limit for the noise floor estimate.

Values: 0 to 0xFFFFFFFF

PrmAGCk (Target Output Level)

Number: 0x1b5f

Description: The **PrmAGCk** parameter defines the output level at which the AGC will attempt to maintain the signal.

Values: 0 to 0xFFFFFFFF

PrmCEDCadence (CED Cadence)

Number: 0x1b53

Description: The **PrmCEDCadence** parameter is used to adjust the duration in milliseconds of the Called Station Identification (CED) signal.

DM/IP uses the cadence mechanism to determine if a tone is a fax tone or a DTMF tone, based on the signal's cadence. This mechanism can be adjusted using the **PrmCEDCadence**, **PrmCNGCadenceMin**, **PrmCNGCadenceMax**, and **PrmCNGCadenceSilence** parameters.

Values: 0 to 400 (milliseconds)

PrmCNGCadenceMin (CNG Minimum Cadence)

Number: 0x1b54

Description: The **PrmCNGCadenceMin** parameter is used to adjust the minimum duration in milliseconds that the cadence mechanism will recognize the CalliNG (CNG) Tone signal as a fax calling tone (also known as an auto fax tone).

DM/IP uses the cadence mechanism to determine if a tone is a fax tone or a DTMF tone, based on the signal's cadence. This mechanism can be adjusted using the **PrmCEDCadence**, **PrmCNGCadenceMin**, **PrmCNGCadenceMax**, and **PrmCNGCadenceSilence** parameters.

Values: 0 to 700 (milliseconds)

PrmCNGCadenceMax (CNG Maximum Cadence)

Number: 0x1b55

Description: The **PrmCNGCadenceMax** parameter is used to adjust the maximum duration in milliseconds that the cadence mechanism will recognize the CalliNG (CNG) Tone signal as a fax calling tone (also known as an auto fax tone).

DM/IP uses the cadence mechanism to determine if a tone is a fax tone or a DTMF tone, based on the signal's cadence. This mechanism can be adjusted using the **PrmCEDCadence**, **PrmCNGCadenceMin**, **PrmCNGCadenceMax**, and **PrmCNGCadenceSilence** parameters.

Values: 500 to 1000 (milliseconds)

PrmCNGCadenceSilence (CNG Silence)

Number: 0x1b56

Description: The **PrmCNGCadenceSilence** parameter is used to adjust the silence period between consecutive CNG tones so that the cadence mechanism will recognize the (CNG) tone signal as a fax calling tone (also known as an auto fax tone). Otherwise, an arbitrary 1100 Hz tone can trigger a fax transmission.

DM/IP uses the cadence mechanism to determine if a tone is a fax tone or a DTMF tone, based on the signal's cadence. This mechanism can be adjusted using the **PrmCEDCadence**, **PrmCNGCadenceMin**, **PrmCNGCadenceMax**, and **PrmCNGCadenceSilence** parameters.

Values: 0 to 5000 (milliseconds)

PrmDTMFGainCtrl (DTMF Gain Control)

Number: 0x1b4b

Description: The **PrmDTMFGainCtrl** parameter is a gain factor by which the signal is amplified, and can be any value between 1 and 8 inclusive. A Gain Control value of 1 results in no amplification.

The **PrmDTMFGainCtrl** parameter is used in conjunction with the **PrmDTMFVolCtrl** attenuation setting parameter to govern the overall signal power level of the signals before they are transmitted to the TDM bus in the direction of the PSTN interface. The product of the **PrmDTMFGainCtrl** setting and the **PrmDTMFVolCtrl** together determine the overall amplification of the DTMF signal.

Values: 0x1 to 0x8

Guidelines: It is recommended that this parameter be modified one integer at a time and the results evaluated. If the volume of the signal is weak, increase this value. If the volume is too strong, decrease this value.

PrmDTMFVolCtrl (DTMF Volume Control)

Number: 0x1b4a

Description: The **PrmDTMFVolCtrl** parameter is essentially a scale (attenuation) factor by which the signal is multiplied. It allows you to fine tune the signal level. The equivalent decimal values range between 0 and 0.999999.

The **PrmDTMFVolCtrl** parameter is used in conjunction with the **PrmDTMFGainCtrl** parameter to govern the signal power level of the DTMF signals before they are transmitted onto the TDM bus in the direction of the PSTN interface.

To determine the hexadecimal value of the **PrmDTMFVolCtrl** parameter, multiply the desired decimal value by 2^{23} and then convert that number into the corresponding hexadecimal value. For example, to define a volume control value of 0.7, multiply 0.7 by 2^{23} (8388608) and convert the product to hexadecimal:

$$0.7 * 8388608 = 5872025.6 \text{ (5872026)} = 0x599D1E$$

Values: 0x0 to 0x7FFFFFFF


Guidelines: If the volume is too weak, increase the value. If the volume is too strong, decrease the value.

PrmDTMFDurationDflt (DTMF On Time)

Number: 0x1b0f

Description: The **PrmDTMFDurationDflt** parameter is used when no on-time and off-time is passed to the coder (only the digit itself is passed). It sets the length of time in milliseconds that the DTMF tone is on. Dual Tone Multi-Frequency (DTMF) tones are comprised of two parts: on-time and off-time. The duration of each can be set separately, to ensure transmission of DTMF tones of sufficient length to be recognized by the receiving side. See [Figure 15, “DTMF Tone Generation”](#), on page 172.

Figure 15. DTMF Tone Generation

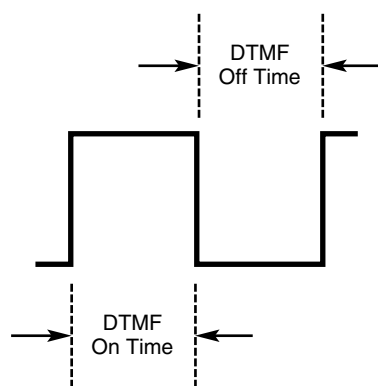

Values: 0x64 to 0xF0

Guidelines: Use the default value as set in the CONFIG files.

PrmDTMFOffTimeDflt (DTMF Off Time)

Number: 0x1b10

Description: The **PrmDTMFOffTimeDflt** parameter is used when no on-time and off-time is passed to the coder (only the digit itself is passed). It sets the length of time in milliseconds that the DTMF tone is off following the DTMF On Time. Dual Tone Multi-Frequency (DTMF) tones are comprised of two parts: on-time and off-time. The duration of each can be set separately, to ensure transmission of DTMF tones of sufficient length to be recognized by the receiving side. See [Figure 15, “DTMF Tone Generation”](#), on page 172.

Values: 0x3C to 0xF0

Guidelines: Use the default value as set in the CONFIG files.

PrmDTMFXferMode (DTMF Transmission Mode)

Number: 0x1b06

Description: The **PrmDTMFXferMode** parameter allows you to select the method for transmitting the Dual Tone Multi-Frequency (DTMF) signals. DTMF signals can be transmitted over the IP network either in-band as a standard voice packet or over the H.245 channel as a special out-of-band DTMF packet.

Note: If out-of-band DTMF transmission is selected, the application may not use User Input Indication.

Values:

- 0: No DTMF signals are transmitted
- 1: DTMF signals are transmitted in-band
- 2: DTMF signals are transmitted out-of-band
- 3: Reserved

PrmECActive (Echo Cancellation)

Number: 0x1b12

Description: The **PrmECActive** parameter enables or disables echo cancellation in the DM/IP gateway. In most cases the echo canceler should be enabled.

Because IP telephony is based on placing long distance calls using local central office circuits, the end points do not receive echo canceled signals. The DM/IP gateway, therefore, must provide the equivalent of Telco grade, long distance echo cancellation. The DM/IP echo canceler provides this capability by removing the echo from the remote channel arriving from the public switched telephone network (PSTN) interface. Parameters used to control the operation of the echo canceler are: **PrmECOrder**, **PrmECMu**, and **PrmECNLPActive**.

Values:

- 0: Disable echo cancellation
- 1: Enable echo cancellation

Guidelines: For applications designed to run over a completely digital network, disable the echo canceler to free up MIPS.

PrmECOrder (Number of Taps)

Number: 0x1b13

Description: The **PrmECOrder** parameter defines the number of taps (1 tap = 0.125 millisecond) that the echo canceler samples.

Because IP telephony is based on placing long distance calls using local central office circuits, the end points do not receive echo canceled signals. The DM/IP gateway, therefore, must provide the equivalent of Telco grade, long distance echo cancellation. The DM/IP echo canceler provides this capability by removing the echo from the remote channel arriving from the public switched telephone network (PSTN) interface. Parameters used to control the operation of the echo canceler are: **PrmECOrder**, **PrmECMu** and **PrmECNLPAActive**.

Values: 48 to 128 taps

PrmECNLPAActive (NLP Enable)

Number: 0x1b1b

Description: The **PrmECNLPAActive** parameter allows you to enable or disable the echo canceler's nonlinear processor (NLP). When the NLP is enabled, the echo canceler uses its comfort noise estimation and generation mechanism to suppress any echo present at the local end.

Because IP telephony is based on placing long distance calls using local central office circuits, the end points do not receive echo canceled signals. The DM/IP gateway, therefore, must provide the equivalent of Telco grade, long distance echo cancellation. The DM/IP echo canceler provides this capability by removing the echo from the remote channel arriving from the public switched telephone network (PSTN) interface. Parameters used to control the operation of the echo canceler are: **PrmECOrder**, **PrmECMu**, and **PrmECNLPAActive**.

Values:

- 0: Disable NLP
- 2: Enable NLP

PrmECMu (Convergence Rate)

Number: 0x1b16

Description: The **PrmECMu** parameter defines the rate of convergence of the echo path estimation algorithm. The higher the value, the faster the convergence rate.

Note: This parameter should not be adjusted without first consulting Customer Engineering.

Values: 0x20C to 0x28F5C

PrmECResSpFlagEnableDisable (Residual Speech Flag)

Number: 0x1b65

Description: The **PrmECResSpFlagEnableDisable** parameter enables both Echo Return Loss (ERL) and other proprietary double-talk mechanisms. If this parameter is disabled, then only ERL is enabled.

Values:

- 0: Disable other proprietary double-talk mechanisms (ERL only is enabled)
- 1: Enable ERL and other proprietary double-talk mechanisms

PrmECSuppressGain (Suppress Gain)

Number: 0x1b66

Description: The **PrmECSuppressGain** parameter is used only when echo cancellation is enabled.

Values: 0x0 to 0xFFFFF

PrmGainCtrl (Gain Control)

Number: 0x1b39

Description: The **PrmGainCtrl** parameter is used in conjunction with the **PrmVolCtrl** parameter to govern the overall signal power level of the decoded PCM data before it is transmitted to the TDM bus in the direction of the PSTN interface.

The product of the **PrmGainCtrl** setting and the **PrmVolCtrl** attenuation setting, together determine the overall amplification of the signal.

Values: 0x1 to 0x8

Guidelines: A value of 1 results in no amplification. If the volume of the signal is weak, increase this value. If the volume is too strong, decrease this value. It is recommended that this parameter be modified one integer at a time and the results evaluated.

PrmVolCtrl (Volume Control)

Number: 0x1b14

Description: The **PrmVolCtrl** parameter is used in conjunction with the **PrmGainCtrl** parameter to govern the signal power level of the decoded PCM data before it is transmitted onto the TDM bus in the direction of the PSTN interface.

The **PrmVolCtrl** parameter is essentially a scale (attenuation) factor by which the signal is multiplied. It allows you to fine tune the signal level. This parameter must assume a hexadecimal

value corresponding to the digital signal processor's (DSPs) 24-bit fractional representation. The equivalent decimal values range between 0.0 and 0.999999.

To determine the hexadecimal value, multiply the desired decimal value by 2^{23} and then convert that number into the corresponding hexadecimal value. For example, to define a volume control value of 0.7, multiple 0.7 by 2^{23} (8388608) and convert the product to hexadecimal:

$$0.7 * 8388608 = 5872025.6 \text{ (5872026)} = 0x599D1E$$

Values: 0x0 to 0x7FFFFFFF

Guidelines: If the volume is too weak, increase the value. If the volume is too strong, decrease the value.

PrmOptLatPktsTx (PLR Optimal Latency)

Number: 0x1b07

Description: The **PrmOptLatPktsTx** parameter defines the amount of Packet Loss Recovery (PLR) latency (delay) that can be introduced by defining the number of frames that can be buffered.

The Packet Loss Recovery module attempts to restore packets arriving at the receive end as close as possible to their original time-stamped positions. Arriving packets are decomposed into individual frames, each with a unique time stamp.

Each new frame is then stored in an elastic buffer before sending it to the decoder. This is done to allow packets arriving out of order to be inserted in the queue in the correct order. The size of this elastic buffer is defined by the number of frames stored and is controlled by both the **PrmOptLatPktsTx** parameter and the **PrmMaxLatPktsTx** parameter.

Values: 0x1 to 0x6 (frames)

Guidelines: While the number of frames to be buffered should be set as high as possible for best quality, too high a value will add unnecessary latency to the system. Generally, the number of frames buffered should be the same size or slightly larger than the number of frames per packet.

PrmMaxLatPktsTx (PLR Maximum Latency)

Number: 0x1b08

Description: The **PrmMaxLatPktsTx** parameter defines the maximum number of frames to be buffered in the Packet Loss Recovery (PLR) frame list. This parameter adds latency only when the buffer is already filled and additional frames arrive before there is space in the buffer. This provides for bursts of packets to arrive, which would have to be discarded otherwise.

The Packet Loss Recovery module attempts to restore packets arriving at the receive end as close as possible to their original time-stamped positions. Arriving packets are decomposed into individual frames, each with a unique time stamp.

Each new frame is then stored in an elastic buffer before sending it to the decoder. This is done to allow packets arriving out of order to be inserted in the queue in the correct order. The size of this elastic buffer is defined by the number of frames stored and is controlled by both the **PrmOptLatPktsTx** parameter and the **PrmMaxLatPktsTx** parameter.

Values: 0x1 to 0x10 (frames)

PrmRedDepth (Redundancy)

Number: 0x1b15

Description: The **PrmRedDepth** parameter sets the number of times that a frame is re-transmitted. This complies with RFC 2198 specification for redundancy.

Values: 1 to 4

PrmFaxEnable (Fax Enable)

Number: 0x1B01

Description: The **PrmFaxEnable** parameter enables or disables the DM/IP support for fax transmission. The DM/IP gateway supports the T.30 fax handshake protocol over the T.38 IP network.

Values:

- 0: Disable fax support
- 1: Enable fax support

PrmT38ECOverride (ECM Override)

Number: 0x1b3c

Description: The **PrmT38ECOverride** parameter allows you to override the Error Correction Mode (ECM) for all calls. If the **PrmT38ECOverride** parameter is enabled, then the gateway will limit the negotiated fax session to only non-ECM calls. This parameter enables the receiving fax device to request missing or erroneous scan lines.

Values:

- 0: Disable (Do not override the ECM)
- 1: Enable (Override the ECM)

PrmT38DFOverride (Limit Image Encoding Method)

Number: 0x1b3d

Description: The **PrmT38DFOverride** parameter limits the type of image encoding method used by the DM/IP.

Values:

- 0: Disable (Enables all image encoding methods)
- 1: MH_ONLY (Disables MR+ image encoding)
- 2: MR_BEST (Disables MMR+ image encoding)

Guidelines: For most images, MMR encoding is smaller than MR, and MR is smaller than MH. If the encoding method is set to MH_ONLY, then the gateway will limit the negotiated image encoding to only MH. If the encoding method is set to MR_BEST, then the gateway will limit the negotiated image encoding to either MH or MR.

PrmT38BROverride (Limit Modulation and Bit Rates)

Number: 0x1b3e

Description: The **PrmT38BROverride** parameter limits the modulation and bit rates for all fax calls.

Values:

- 0: Enable all modulations and bit rates
- 1: V27_ONLY (disables V.29+)
- 2: V29_BEST (disables V.17+)

Guidelines: Each modulation has its own range and baud rate that it supports. For V.27, the rates are 2400 and 4800 baud. For V.29, the rates are 7200 and 9600 baud. For V.17, the range is 7200 to 14400. Setting this parameter to V27_ONLY limits the negotiate fax session to just V.27. Setting this parameter to V29_BEST limits the negotiate fax session to V.27 or V.29.

PrmT38TCFThrshld (Local Training Maximum Error Tolerance)

Number: 0x1b3f

Description: The **PrmT38TCFThrshld** parameter sets the local modem training maximum error tolerance. If the error rate is higher than the value set, the call will retrain at a lower bit rate. The tolerance is set as a percentage of the bit rate.

Values: 0 to 100 (%)

PrmT38IndSecBlocks (Fax IND Redundancy Factor)

Number: 0x1b4d

Description: The **PrmT38IndSecBlocks** parameter defines the number of secondary blocks to send with each fax packet for IND events.

Values: 0 to 15

PrmT38V21SecBlocks (Fax V21 Redundancy Factor)

Number: 0x1b4e

Description: The **PrmT38V21SecBlocks** parameter defines the number of V.21 secondary blocks to send with each fax packet.

Values: 0 to 15

PrmT38HSECMSecBlocks (Fax HSECM Redundancy Factor)

Number: 0x1b4f

Description: The **PrmT38HSECMSecBlocks** parameter defines the number of high speed Error Correction Mode (ECM) secondary blocks to send with each fax packet.

Values: 0 to 3

T38HSSecBlocks (Fax HS Redundancy Factor)

Number: 0x1b50

Description: The **T38HSSecBlocks** parameter defines the number of high speed secondary blocks to send with each fax packet.

Values: 0 to 3

PrmT38HSEOFSecBlocks (Fax HSEOF Redundancy Factor)

Number: 0x1b51

Description: The **PrmT38HSEOFSecBlocks** parameter defines the number of high speed End of Frame (EOF) secondary blocks to send with each fax packet.

Values: 0 to 3

PrmT38HSEOTSecBlocks (Fax HSEOT Redundancy Factor)

Number: 0x1b52

Description: The **PrmT38HSEOTSecBlocks** parameter defines the number of high speed End of Text (EOT) secondary blocks to send with each fax packet.

Values: 0 to 15

PrmT38TxThrshld (Transmit Hold Back Threshold)

Number: 0x1b40

Description: The **PrmT38TxThrshld** parameter allows you to define the transmit hold back threshold.

Values: 0 to 100 (milliseconds)

Guidelines: Increasing the time (in milliseconds) permits the system to better handle timing jitter without generating image errors, but reduces the tolerance for total end-to-end network delay.

PrmT38TCFMethod (Local or End-to-End Training)

Number: 0x1b41

Description: The **PrmT38TCFMethod** parameter specifies whether the modem training is local or end-to-end across the network.

Values:

- 0: Local training
- 1: End-to-end training

PrmT38TxPower (Transmit Power Level)

Number: 0x1b42

Description: The **PrmT38TxPower** parameter specifies the transmit power level gain for all modes. The value is set in terms of -dBm0.

Values: -3 to -60 (dBm)

PrmT38SpoofLevel (Spoofing Level)

Number: 0x1b5b

Description: The **PrmT38SpoofLevel** parameter enables proactive algorithms in the T.38 coder to compensate for excessive round trip delay in the IP network.

Note: Only level 0 is currently supported.

Values:

- 0: None [default]
- 1: Level 1

Guidelines: Level 0 (default) is for networks with a maximum 2 seconds round trip delay. Level 1 is for networks with delays up to 3 seconds.

PrmHPFActive (HPF Enable)

Number: 0x1b1d

Description: The **PrmHPFActive** parameter allows you to enable or disable the high pass filter (HPF). When enabled, the HPF removes DC and very low frequency corruption from the data.

Values:

- 0: Disable HPF
- 1: Enable HPF

6.26 [0x1d] Parameters

The [0x1d] section only applies in COFIG files that are selected with DM/IP boards. The PrmTOS parameter is in this section.

PrmTOS (Type of Service)

Number: 0x1d01

Description: The **PrmTOS** parameter sets the Type of Service (TOS) byte in the IP header of transmitted datagrams to improve the mobility of the UDP/TCP packets. The TOS byte is set at board initialization time when the PCD file is downloaded to the board.

Values:

- 0x10: LOWDELAY - selects a minimum delay link or circuit for the datagram
- 0x08: THROUGHPUT - selects a high throughput link or circuit for the datagram
- 0x04: RELIABILITY - selects a high reliability link or circuit for the datagram
- 0x02: MINCOST - selects a minimum cost link or circuit for the datagram
- 0x00: No Priority - the datagram has no priority assigned

Glossary

0x1b: Section of the CONFIG files that defines parameters relating to data received from the network. The parameters associated with this section have parameter numbers that start with 0x1b and only apply to DM/IP technologies.

0x2b: Section of the CONFIG file that defines encoding for Audio of music played when placing station on hold.

0x2c: Section of the CONFIG file that defines echo cancellation parameters used in Continuous Speech Processing (CSP) applications, as well as parameters associated with Silence Compressed Streaming (SCS).

0x39: Section of the CONFIG file that defines conferencing parameters applicable to all conferencing lines on a board.

0x3b: Section of the CONFIG file that defines parameters relating to conferencing.

0x44: Section of the CONFIG file that defines the companding method for Intel® NetStructure™ DI Series Station Interface boards.

4ESS: A T1 protocol switch primarily used for switching digital voice, but it also supports ISDN protocols.

5ESS: A T1 protocol switch used for switching digital voice and data channels, and supports both basic rate and primary rate ISDN.

AGC: Automatic Gain Control is an encoding process that attempts to maintain a constant volume during voice recording.

alternate mark inversion: See AMI.

AMI: Alternate mark inversion is a form of bipolar signaling in which each successive mark is of the opposite polarity and spaces have zero amplitude.

Automatic Gain Control: See AGC.

base protocol: The protocol implemented by the CHP component. Protocol variants are derived from this base. Compare with *protocol variant*.

B channel: An ISDN bearer channel that carries voice, fax and compressed video.

CAS: Channel Associated Signaling is the component responsible for managing the generation and detection of digital line signaling functions required to manage voice channels. Channel Associated Signaling also applies to a signaling method in which the signaling for that channel is directly associated with the channel.

CCS: Common Channel Signaling is the component that applies to technologies such as ISDN that use common channel signaling. Common Channel Signaling also applies, in general, to a signaling method in which the signaling for a group of channels is carried on a separate (common) channel.

CDP: Country Dependent Parameters file defining parameters necessary for configuring products to different country requirements. This file has a *.cdp* extension.

CEPT: European Conference of Postal and Telecommunications Administrations. A group of European countries organized for the purpose of setting telecommunications standards in Europe.

CFA: Carrier-Failure Alarm.

CHP: Channel Protocol is the component responsible for implementing the telephony communication protocol that is used on each network interface.

clear channel: A signaling configuration where none of the line's bandwidth is used for signaling. Clear channel signaling is the ability to access telephony channels in the system and configure them to a user defined call control protocol, or to simply leave the lines 'clear'. The resources should have access to the telephony bus for media routing purposes, as well as signal detection, signal generation, and tone generation capabilities, if desired. NFAS is an example of clear channel signaling.

clock master: The device (board) that provides timing to all other devices attached to the TDM bus. The clock master drives bit and framing clocks for all of the other boards (slaves) in the system.

cluster: A collection of component instances that share specific TDM time slots on the network interface and which therefore operate on the same media stream data. The cluster concept in the Intel® Dialogic® architecture corresponds generally but not exactly to the concept of a "group" in S.100 or to a "channel" in conventional Dialogic architectural terminology. Component instances are bound to a particular cluster and its assigned time slots in an allocation operation.

CNG: Comfort Noise Generation.

CONFIG: A text-input configuration file containing component-specific parameters. This file has a *.config* extension and is used to create an FCD file.

configuration file: See CONFIG file.

configuration file set: A set of files associated with a specific board configuration. All the files in the set have the same name, but different extensions. The set includes the CONFIG, FCD, and PCD files.

Country Dependent Parameters: See CDP.

CRC: Cyclic Redundancy Check.

D channel: An ISDN channel that carries signaling information.

D4: A T1 protocol switch that supports T1 robbed bit signaling and provides D4 framing, but does not support ISDN protocols.

DCM: Configuration Manager - a software program that allows you to configure system-level and certain board-level parameters.

DM3: An architecture on which a whole set of Intel telecom products is built. The DM3 architecture is open, layered, and flexible, encompassing hardware as well as software components.



DMA: Direct memory access.

DMS: A T1 protocol switch (DMS-100) for primary rate ISDN applications.

Driver property sheet: DCM property sheet that contains parameters to optimize the board's throughput by customizing certain aspects of the board's device driver.

DTD: Dial Tone Detection.

DTMF: Dual Tone Multi-Frequency. Touchtone dialing.

E&M: Two-way telephony signaling that uses an "E" (far end) lead and an "M" (near-end) lead. Signaling is accomplished by applying -48 volts DC to the leads.

encoder: The component responsible for performing an encoding process on a media stream.

FCD: Feature Configuration Description file that lists any non-default parameter settings that are necessary to configure a hardware/firmware product for a particular feature set. This file has a *.fcd* extension.

fcdgen: A command-line application that enables you to generate an FCD file from a base CONFIG file.

Feature Configuration Description: See FCD.

fixed routing: A routing configuration where the resource devices (voice/fax) and network interface devices are permanently coupled together in a fixed configuration. Only the network interface time slot device has access to the CT Bus

flash: While the phone is off-hook, quickly pressing and releasing the flash hook to signal the central office or PBX that you are requesting special processing, for example, call waiting.

flash hook: The plunger the phone's handset rests on while on-hook.

flexible routing: A routing configuration where the resource devices (voice/fax) and network interface devices are independent, which allows exporting and sharing of the resources. All resources have access to the CT Bus.

FRU: Field replaceable unit.

FXO: Foreign Exchange Office - a device at a central site that permits extending PBX services to remote sites. The FXO emulates a phone to the PBX.

FXS: Foreign Exchange Station - a device located remotely from a PBX that permits extending PBX services to remote sites. The FXS emulates a PBX to the remote phone.

ground start: A two-way, two-wire (tip and ring) signaling method similar to loop start in which the current flows in a circuit. Ground start is normally between a PBX and central office and seizure of the line is accomplished by momentarily grounding one of the circuit wires, usually the ring of the tip and ring circuit.

HDB3: A modified AMI signaling code that only applies to E1 and is used to preserve one's density on the line.

high density bipolar three zero: See HDB3.

in-band signaling: A signaling scheme where both the data and the signaling information for the data are carried over the same channels.

instance: A component instance is an addressable unit within the software architecture; it represents a single thread of control. The system resource management and messaging services operate at the instance level. A set of component instances that make up a resource instance communicate with one another using the system messaging services. A set of component instances is usually associated with a channel of call processing.

IPVS: IP Voice Streaming

ISDN: Integrated Services Digital Network. See primary rate ISDN.

LAPD: Link Access Protocol for the D channel.

Layer 1: Physical layer of the OSI model that address the physical aspects of network access.

Layer 2: Data Link layer of the OSI model that address data transfer and routing.

Layer 3: Network layer of the OSI model that addresses line communication procedures.

LCON: See LineAdmin.

LineAdmin: Line Administration component responsible for managing line devices.

LOF: Loss of frame.

Logical property sheet: DCM property sheet that contains parameters for configuring a board's trunk interface.

LOS: Loss of signal.

loop start: A two-way, two-wire (tip and ring) signaling method in which the current used for signaling flows in a circuit (loop) between a telephone and PBX or a telephone and central office. Seizure of the line is accomplished by going off-hook which causes current to flow in a circuit (loop).

LOF: Loss of Frame.

media loads: Pre-defined, numbered sets of features supported by DM/V, DM/N, DM/T, DM/IP, and DM/F boards.

MF: Multi-Frequency

Misc property sheet: DCM property sheet that contains the parameters that define the configuration file set for the board (**PCDFFileName** and **FCDFFileName**), as well as, system-level and miscellaneous parameters.

MLM: Load Module.

Net5: An E1 protocol switch. Net5 is a European ISDN primary rate switch.

NFAS: Non-Facility-Associated Signaling is a form of out-of-band signaling where a single ISDN primary rate D channel provides signaling and control for up to 10 ISDN primary rate lines.



NI-2: National ISDN-2. A U.S. standard software interface that can be installed on most switch types, providing maximum inter operability with ISDN lines.

NIC: Network interface card.

NTT: A T1 protocol switch (INS-Net 1500) that is used by Nippon Telephone and Telegraph (NTT) for primary rate ISDN.

on-hook: The signaling state that occurs when a handset is sitting on the phone (the phone's inactive state) and the flash hook is depressed. Compare with *off-hook*.

off-hook: The signaling state that occurs when the handset is removed from the phone and the flash hook is released. When a phone is taken off-hook it signals the central office or PBX that it needs attention, for example, to make a call or to answering an incoming call. Compare with *on-hook*.

OSI: Open Standards Interconnections. ISO-developed open standards-based framework for inter-system communications. The OSI model categorizes the communication process into seven layers. Layers 1 to 4 address network access and Layers 5 to 7 address messaging.

out-of-band signaling: A signaling scheme where the signaling is carried over channels separate from the channels carrying the data.

PAMD: Positive answering machine detection.

PBLM: Processor Boot Load Module.

PBX: Private Branch Exchange.

PCD: Product Configuration Description file that contains product or platform configuration description information. This file has a *.pcd* extension.

PCM: Pulse Code Modulation.

PDK: Protocol Developer Kit.

PDK Configuration Utility: A Graphical User Interface (GUI) application that enables you to generate an FCD file from a base CONFIG file and a number of protocol CDP files. This utility integrates Global Call protocols (CDP files) into the FCD file and all parameters are download during system initialization.

PDKManager: A command-line application that enables you to download and configure Global Call protocols on DM/V boards. These protocols are configured separately from the board-level parameters defined in the CONFIG file and are downloaded after system initialization.

Physical property sheet: DCM property sheet that contains parameters that relate to the physical aspects of the board including physically identifying the board.

PLM: Processor Load Module.

port: A logical entity that represents the point at which PCM data can flow into or out of a component instance or interface in a cluster. The port abstraction provides a high-level means of defining potential data flow paths within

clusters and controlling the actual data flow using simple protocols. Ports are classified and designated in terms of data flow direction and the type of entity that provides the port.

primary D channel: the D channel that provides the signaling and control in an NFAS configuration.

primary rate ISDN: An application that uses a single channel to carry the signaling for all other channels on a line. On a T1 line, the application uses channels 1 through 23 (B channels) to carry data, digital voice, and compressed video. Channel 24 (D channel) carries the signaling for all 23 B channels. On an E-1 line, the application uses channels 1 through 15 and 17 through 31 (B channels) to carry data, digital voice, and compressed video. Channel 16 (D channel) carries the signaling for all 30 B channels.

Product Configuration Description: See PCD.

property sheet: A grouping of parameters in DCM that is based on functionality.

protocol variant: A version of the base protocol that has been customized by a set of parameters. This parameter set configures a CHP component to support a particular T-1 telephony protocol. Features such as wink start, DTMF DNIS and MF ANI are enabled and tuned by the parameters in a protocol variant. Compare with *base protocol*.

pulse: A temporary state change from the current signal state to a new signaling state, and then back to the original signaling state. Compare with *sequence*, *train* and *transition*.

PVD: Positive voice detection.

Q.931: Primary rate ISDN D channel signaling protocol standard. (ITU-T Recommendation I.451). The protocol defines the signaling packet, including message type and content, and allows for voice and data transfer on a single trunk.

QSIG: A T1 and E1 protocol switch. QSIG is an ISDN signaling and control protocol used for communications between two or more Private Integrated Network Exchange applications (PSS1). The signaling protocol for this standard is defined by Q.931.

R2MF: An E1 protocol switch. R2MF is an in-band common channel signaling protocol that uses channel 16 to convey the signaling for the 30 voice channels. This international signaling system is used mostly in Europe and Asia in non-ISDN applications to permit the transmission of numerical and other information relating to the called and calling subscriber lines.

RAI: Remote Alarm Indication.

Rate Adaption: Conversion of digital data into a different transfer speed (rate) and form.

recorder: The component responsible for a resource's message exchanges with the host, as well as media stream management and encoder component control functions.

red alarm: An alarm generated by the device at the receiving end of a T-1 or E-1 line to report a loss of signal or frame alignment (synchronization) in the signal being received (incoming data).

resource: A conceptual entity that provides a specific functionality to a host application. A resource contains a well defined interface or message set, which the host application utilizes when accessing the resource. Resource firmware consists of multiple components that run on top of the core platform software (which includes the



platform-specific DM3 kernel and device driver). The Global Call resource is an example of such a resource, providing all of the features and functionality necessary for handling calls on the platform.

SCR: Silence Compressed Record is an encoding process that compresses silence during voice recording.

SCS: Silence Compressed Streaming refers to the process of streaming audio energy to the host application with silence periods significantly reduced.

sequence: A set of train signals. Compare with *pulse*, *train* and *transition*.

Silence Compressed Record: See SCR.

Silence Compressed Streaming: See SCS

SIT: Standard Information Tones

slave: Device (board) that is not a clock master, but instead, derives its timing from the TDM bus.

system tray: In a Windows* operating system, an area of the interface (normally in the lower, right-hand corner) that contains icons, or short cuts, for launching applications.

TDM: Time division multiplexing.

TDM bus: The resource bus used to carry information between boards

TDM Bus Configuration property sheet: DCM property sheet that contains parameters for configuring the TDM bus.

TEI: Terminal Endpoint Identifier. TEI defines which device(s) attached to a BRI ISDN line is communicating with the CO.

Telephony Bus property sheet: (CM property sheet for setting PCM encoding method and bus type for a DMN160TEC board.

time division multiplex: A multiplexing scheme in which a number of low speed digital signals are incorporated onto a high speed line in a byte-interleave pattern.

train: A set of transitions from one signaling state to another in a predefined pattern (set of pulses). Compare with *pulses*, *sequence* and *transition*.

transition: A permanent state change from the current signal state to a new signaling state. Compare with *pulse*, *sequence* and *train*.

Trunk Configuration property sheet: DCM property sheet for configuring DMN160TEC trunks.

TS16: An E1 protocol switch. TS16 is a type of clear channel signaling which allows time slot 16 to be used for data instead of signaling.

TSC: Telephony Service Component is the component responsible for managing the B channel sets.

Version Info. DCM property sheet that contains parameters that identify control processor and signal processor kernel versions.

VAD: Voice Activity Detection.

wink: A single pulse used sent from a phone, central office, or PBX as part of protocol hand-shaking.

yellow alarm: An alarm generated by the device at the receiving end of a T-1 or E-1 line and sent to the device at the transmitting (remote) end to signify that a red alarm condition exists at the receiving (local) end. The yellow alarm is sent to the transmitting device as long as the red alarm condition exists at the receiving end.



Numerical Index of Parameters

0x05	128	0x1310.....	133
0x07	132	0x1311.....	133
0x09	132	0x1312.....	133
0x0b	129	0x1601.....	104
0x0c	129	0x1602.....	104
0x0d	130	0x1603.....	105
0x0e	130	0x1604.....	106
0x0f.....	130	0x1609.....	107
0x10	130	0x160a.....	107
0x13	131	0x160b.....	107
0x14	129	0x160c.....	107
0x15	131	0x160d.....	107
0x16	131	0x160e.....	108
0x17	131	0x160f.....	108
0x200	100	0x1610.....	108
0x202	101	0x1611.....	108
0x203	101	0x1624.....	106
0x205	101	0x1625.....	108
0x209	101	0x1630.....	109
0x401	97	0x1b01.....	177
0x405	97	0x1b06.....	173
0x408	98	0x1b07.....	176
0x415	98	0x1b08.....	176
0x417	99	0x1b0f.....	172
0x418	99	0x1b10.....	173
0x419	99	0x1b12.....	173
0x41a	100	0x1b13.....	174
0x1209.....	158	0x1b14.....	175
0x120C.....	166	0x1b15.....	177
0x120D.....	166	0x1b16.....	174
0x120F.....	166	0x1b1b.....	174
0x1210.....	166	0x1b1c.....	169
0x1218.....	167	0x1b1d.....	180
0x1219.....	167	0x1b39.....	175
0x121B.....	166	0x1b3c.....	177
0x121C.....	167	0x1b3d.....	177

0x1b3e.....	178	0x3b04.....	103
0x1b3f.....	178	0x3e00.....	112
0x1b40.....	179	0x3e02.....	111
0x1b41.....	179	0x3e04.....	112
0x1b42.....	180	0x3e05.....	113
0x1b4a.....	172	0x4401.....	92
0x1b4b.....	171	0x9201.....	127
0x1b4d.....	178	0x9111.....	127
0x1b4e.....	178	0x9201.....	126
0x1b4f.....	178	0xC15CA001.....	114
0x1b50.....	179	0xC15CA002.....	114
0x1b51.....	179	0xC15CA003.....	114
0x1b52.....	179	0xC15CA011.....	114
0x1b53.....	170	0xC15CA012.....	115
0x1b54.....	170	0xC15CA021.....	116
0x1b55.....	171	0xC15CA022.....	116
0x1b56.....	171	0xC15CA023.....	116
0x1b5b.....	180	0xC15CA024.....	117
0x1b5d.....	170	0xC15CA025.....	117
0x1b5e.....	169	0xC15CA026.....	117
0x1b5f.....	170	0xC15CA027.....	118
0x1b60.....	169	0xC15CA029.....	118
0x1b61.....	169	0xC15CA02A.....	118
0x1b62.....	169	0xC15CA031.....	119
0x1b63.....	170	0xC15CA032.....	119
0x1b64.....	169	0xC15CA033.....	120
0x1b65.....	175	0xC15CA041.....	121
0x1b66.....	175	0xC15CA042.....	121
0x1d01.....	181	0xC15CA043.....	122
0x2b12.....	93	0xC15CA044.....	122
0x2c03.....	94	0xC15CA045.....	122
0x2c14.....	94	0xC15CA046.....	123
0x2c15.....	94	0xC15CA047.....	123
0x2c16.....	95	0xC15CA048.....	123
0x2c17.....	95	0xC15CA049.....	124
0x2c1f.....	93	0xC15CA04A.....	124
0x2c24.....	96	0xC15CA04B.....	124
0x2c25.....	96	0xC15CA051.....	125
0x3925.....	102		
0x3b02.....	102		

Symbols

[0x1b] CONFIG file section 31
 [0x2b] CONFIG file section 30
 [0x2c] CONFIG file section 30
 [0x39] CONFIG file section 30
 [0x3b] CONFIG file section 31
 [0x44] CONFIG file section 30
 [CAS] CONFIG file section 31, 34
 [CCS] CONFIG file section 31
 [CHP] CONFIG file section 31, 43
 [encoder] CONFIG file section 31
 [lineAdmin] CONFIG file section 31
 [NFAS] CONFIG file section 31, 33
 [recorder] CONFIG file section 30
 [TSC] CONFIG file section 31, 45

A

A Law
 encoding parameter 158
 Layer 1 Protocol 152
 accessing property sheets 14
 ActiveTalkerNotifyInterval parameter 102
 Address Definition parameter 144
 Admin parameter 162
 AdministrativeStatus parameter 71
 ADPCM Layer 1 Protocol 152
 AGC
 algorithm 31
 parameters 97-98
 AGC Enable parameter 169
 AGC Flag parameter 101
 AGC K Constant parameter 97
 AGC Maximum Gain parameter 98
 AGCOnOff parameter 101
 alternate mark inversion (AMI) 105, 106
 ANI (Flag) parameter 139
 ANI Digit Count (ANICount) parameter 139
 ANI Digit Format (ANIFormat) parameter 139
 Answer Deglitcher parameter 156
 Answer Timeout parameter 142, 157
 Answering Machine Signal parameter 142, 157
 AnswerTimeout parameter 138
 Assign Firmware File Dialog box 53
 Audio Filter Coefficients parameter 109

automatic gain control. *See* AGC

B

B Channel Identifier parameter 163
 B channel set
 defineBSet command 45
 parameters 159-165
 B8ZS 105
 background noise threshold, high 100
 background noise threshold, low 99
 BaseProtocol parameter 161
 BChanId parameter 163
 beep tone 101
 BeepSignalID parameter 101
 Bell zero code suppression 106
 blind transfer 119, 125
 BlindTransfer parameter 143
 blocking pattern 133
 Board monitoring frequency in seconds parameter 69
 BoardEnabled parameter 69
 BoardPresent parameter 69
 boards
 configuration files 52
 BtAddressDef parameter 144
 BtCancelDigits parameter 145
 BtCancelDigitsFormat parameter 145
 BtCancelFlashCount parameter 145
 BtCancelInterFlashDuration parameter 145
 BtDestFormat parameter 144
 BtDestPrefix parameter 145
 BtDestSuffix parameter 145
 BtDialToneId parameter 143
 BtOrigFormat parameter 144
 BtOrigPrefix parameter 145
 BtOrigSuffix parameter 146
 BtStartTimeout parameter 144
 Buffer Truncate parameter 101
 BufferTruncate parameter 101
 bus companding method
 setting for DM3 configurations 55
 BusType parameter 87
 Busy Signal parameter 141, 156

C

- CaAnsdgIPSV parameter 155
- CaAnswerTimeout parameter 142, 157
- CaBusySet parameter 141, 156
- CaDialTimeout parameter 143
- CaFaxSet parameter 142, 157
- CaHdgLoHiGl parameter 155
- Call Progress Detection parameter 141
- Call Progress Flag parameter 155
- CalledNumberCount parameter 153
- CalledNumberPlan parameter 153
- CalledNumberType parameter 153
- CallingNumberCount parameter 155
- CallingNumberPlan parameter 154
- CallingNumberPresentation parameter 154
- CallingNumberScreening parameter 154
- CallingNumberType parameter 154
- CallProgress parameter 141, 155
- Cancel Digits Format parameter 145
- Cancel Digits parameter 145
- Cancel Flash Count parameter 145
- Cancel Inter-flash Duration parameter 145
- CaPamdId parameter 142, 157
- CaPvdId parameter 142, 157
- CaPvdTimeout parameter 143, 157
- CaRingingSet parameter 141, 156
- carrier-failure alarm. *See* CFA
- CAS
 - CONFIG file section 31, 34
 - setting signaling type 104
 - signal definitions 34
 - T1 E&M parameters 113-115
 - T1 ground start parameters 120-125
 - T1 loop start parameters 115-120
 - user-defined CAS and tone signals 125
 - user-defined selectable ring signals 126
- CaSignalTimeout parameter 142, 157
- CaSitSet parameter 141, 156
- CCS
 - CONFIG file section 31
 - parameters 128-132
- CCS_PROTOCOL_MODE parameter 131
- CCS_SWITCH_TYPE parameter 132
- CCS_TEL_RETRY parameter 131
- CCS_TEL_STABILITY parameter 131
- CCS_TMR_302 parameter 129
- CCS_TMR_303 parameter 129
- CCS_TMR_304 parameter 129
- CCS_TMR_305 parameter 130
- CCS_TMR_308 parameter 130
- CCS_TMR_310 parameter 130
- CCS_TMR_313 parameter 130
- CED Cadence parameter 170
- CFA parameters
 - RAI CRC 108
- CFA parameters
 - LOS 107
 - RAI CRC 108
 - red alarm 107
 - yellow alarm 108
- Channel Associated Signaling. *See* CAS
- Channel Protocol. *See* CHP
- channel set. *See* B channel set
- channel state 133
- CHP
 - analog voice variants 158
 - CONFIG file section 31, 43
 - ISDN protocol variants 150-??
 - parameters 132-133
 - T1 protocol variants 134-150
- clear channel
 - See also* defineBSet parameters
 - setting signaling type 105
- clear channel signaling 46
 - E1 configurations 46
 - general considerations 48
 - T1 configurations 48
- clock fallback concepts 26
- clock source
 - setting for H.100 and H.110 mode systems (CT Bus) 54
- cluster configuration 22
- CNG Maximum Cadence parameter 171
- CNG Minimum Cadence parameter 170
- CNG Silence parameter 171
- Coding parameter 105
- comments
 - CONFIG file 30
- Common Channel Signaling. *See* CCS
- Companding parameter 92
- Computer Name Dialog box 51
- conferencing
 - active talker notification interval 102
 - tone clamping 102
- Conferencing Notification Tone parameter 103
- CONFIG file 17
 - [CAS] section 34
 - [CHP] section 43
 - [encoder] section 31
 - [NFAS] section 33
 - [TSC] section 45
 - editing 60
 - formatting conventions 29
 - See also* configuration file sets
- configuration
 - DCM property sheet parameters 58
 - network interface connector (NIC) 56



- configuration file sets 17, 23
- Configuration Manager
 - starting 50
- configuration manager *See DCM 13*
- configuring DMN160TEC and DMT160TEC trunks for clear channel signaling 46
- connecting to a computer 51
- context sensitive help *See Online Help*
- Convergence Rate parameter 174
- Count parameter 165
- country dependent parameter files
 - downloading 62
- coupled resources 22
- CPBKVersion parameter 88
- CPRTKVersion parameter 88
- CRC error 108
- CRC-4 multiframe 104
- CT Bus clock fallback concepts 26
- CTBus
 - setting the clock source 54
- CTBus parameters *See TDM Bus parameters*
- CurrentState parameter 68
- Custom PCD files 18, 25

D

- D channel backup 113
- D Channel Descriptor parameter 162
- D4 framing 104
- DCBU 113
- DChanDesc parameter 162
- DCM 13
 - See also property sheets*
 - connecting to a computer 51
 - main window 14
 - Online Help 15
 - property sheet parameters 58
 - starting 50
 - starting the GUI 50
- DCOM 51
- default settings, restoring 62
- defineBSet
 - command 45
 - parameters 159-165
- Derive NETREF Two From (User Defined) parameter 86
- Derive Primary Clock From (User Defined) parameter 83
- Derive Secondary Clock From (User Defined) parameter 84
- Destination Address Digits parameter 144
- Destination Prefix Digits parameter 145
- Destination Suffix Digits parameter 145
- Dial Digits Format parameter 139
- Dial parameter 139

- Dial Timeout parameter 143
- dial tone detection 143
- Dial Tone Signal parameter 143
- DialFormat (Dial Digits Format) 139
- DialFormat parameter 139
- DialToneId parameter 143
- Digital Data Service zero code suppression 106
- Direction parameter 164
- DisableBlock parameter 133
- DisconnectTimeout parameter 138, 151
- DlgcOUI parameter 77
- DM/IP Series boards 24
- DM/V and DM/V-A Series boards 23
- DNIS (Flag) parameter 140
- DNIS Digit Count parameter 140
- DNIS Digit Format parameter 140
- DNISCount parameter 140
- DNISFormat parameter 140
- doDMA parameter 66
- downloading CDP files 62
- Driver property sheet 65
- DTD Signal parameter 143
- DTD Timeout parameter 144
- DTMF Gain Control parameter 171
- DTMF Off Time parameter 173
- DTMF On Time parameter 172
- DTMF Transmission Mode parameter 173
- DTMF Volume Control parameter 172
- Duration parameter 100

E

- E&M Flash On-hook Signal parameter 114, 146
- E&M Flash Signal parameter 115, 147
- E&M Off-hook Signal parameter 114, 146
- E&M On-hook Signal parameter 114, 146
- E&M signals
 - flash 115
 - flash on-hook 114
 - off-hook 114
 - on-hook 114
 - wink 114
- E&M Wink Signal parameter 114, 146
- E1 framing 104
- EC Mode parameter 93
- EC Streaming to TDM Bus parameter 93
- EC Tail Length parameter 94
- Echo Cancellation parameter 173
- echo cancellation parameters 92-94
- ECM Override parameter 177
- editing

See CDP file, CONFIG file, SCD file

EM_Flash parameter 147
 EM_FlashOnhook parameter 146
 EM_Offhook parameter 146
 EM_Onhook parameter 146
 EM_Wink parameter 146
 enable/disable forced disconnect 158
 encoder
 CONFIG file section 31
 parameters 97-100
 Encoding (Method) parameter 158
 encoding method, DI boards 92
 ESF 104
 extended superframe 104

F

FarEndAnswer parameter 138
 Fast Attack Filter Coefficient parameter 169
 Fax Enable parameter 177
 Fax HS Redundancy Factor parameter 179
 Fax HSECM Redundancy Factor parameter 178
 Fax HSEOF Redundancy Factor parameter 179
 Fax HSEOT Redundancy Factor parameter 179
 Fax IND Redundancy Factor parameter 178
 Fax Signal parameter 142, 157
 Fax V21 Redundancy Factor parameter 178
 FCD file 12
 FCD files 17
 See also configuration file sets, fcdgen, PDK
 Configuration Utility
 FCDFilename parameter 70
 fcdgen utility 18, 61
 feature configuration description 12
 Feature Description File. See FCD files
 features supported 19
 fixed routing 22
 See also media loads
 fixed routing configuration restrictions 23
 Flash parameter 115
 FlashOnHook parameter 114
 flexible routing 22
 See also media loads
 forced disconnect
 enabling/disabling 158
 formatting conventions
 CONFIG file 29
 Framing Alogorithm parameter 106
 framing format 104
 freeOrphanOnDepletion parameter 66
 FSK signal level
 receive signal 60

setting 59
 transmit signal 59

G

Gain Control parameter 175
 Gain Inc Value parameter 169
 Gain parameters 165
 GatewayIPAddress parameter 73
 Global Call protocols
 base protocol 161
 Ground Start Flash Drop Signal parameter 149
 Ground Start Net Answer Signal parameter 124
 Ground Start Net Drop Signal parameter 123, 149
 Ground Start Net Flash Drop Signal parameter 124
 Ground Start Net Ground Signal parameter 122, 149
 Ground Start Net Ring Off Signal parameter 150
 Ground Start Net Ring On Signal parameter 150
 Ground Start PBX Answer Signal parameter 121, 148
 Ground Start PBX Drop Signal parameter 149
 Ground Start PBX Flash Drop Signal parameter 124, 149
 Ground Start PBX Flash Signal parameter 125, 149
 Ground Start PBX Ground Signal parameter 121, 148
 Ground Start PBX Release Signal parameter 122, 149
 Ground Start Ring Off Signal parameter 123
 Ground Start Ring On Signal parameter 123
 ground start signal
 net answer 124
 net drop 123
 net flash drop 124
 net ground 122
 PBX answer 121
 PBX drop 122
 PBX flash 125
 PBX flash drop 124
 PBX ground 121
 PBX release 122
 ring off 123
 ring on 123
 Group Four Clock Rate (User Defined) parameter 80
 Group Identifier parameter 112
 Group One Clock Rate (User Defined) parameter 79
 Group Three Clock Rate (User Defined) parameter 80
 Group Two Clock Rate (User Defined) parameter 80
 GroupID parameter 112
 GS_Net_Drop parameter 149
 GS_Net_FlashDrop parameter 149
 GS_Net_Ground parameter 149
 GS_Net_RingOff parameter 150
 GS_Net_RingOn parameter 150
 GS_PBX_Answer parameter 148
 GS_PBX_Drop parameter 149
 GS_PBX_Flash parameter 149



GS_PBX_FlashDrop parameter 149
GS_PBX_Ground parameter 148
GS_PBX_Release parameter 149
GTE zero code suppression 106

H

HDB3 105
Hello Edge parameter 155
help *See Online Help*
high background noise threshold 100
high density bipolar three zero 105
High Density Station Interface boards 24
High Glitch parameter 155
Hookflash parameter 126
HostName parameter 73
hotloadable file. *See* HOT file 62
HPF Enable parameter 180

I

impedances
 termination 109
Inbound (Variant) parameter 161
inbound protocol variant 161
independent resources 22
InfoTransferCap parameter 152
InfoTransferRate parameter 152
Initial CAS Signaling Bit Pattern parameter 108
InitialChanState (Initial Channel State) parameter 133
initializing the system 12, 61
INSTANCE_MAP parameter 128
InstanceNumber parameter 75
InterCallDelay parameter 138, 151
InterDigitTimeout parameter 141
IntVector parameter 76
IPAddress parameter 72
IRQLevel parameter 76
ISDN Protocol Mode parameter 131
ISDN protocol variants 150-??

L

L2_TRACE parameter 132
LAPD 132
Layer 2 access flag 132
Layer 2 Access Flag parameter 132
Layer 3 LAPD functionality 132
Layer1Protocol parameter 152
leading edge, ring
 ground start 123

 loop start 117
Limit Image Encoding Method parameter 177
Limit Modulation and Bit Rates parameter 178
line
 administration 103
 configurations, ISDN protocols 150
 configurations, T1 protocols 134
lineAdmin
 CONFIG file section 31
line-coding 106
LineId parameter 160
Linetype parameter 104
Link Access Protocol for the D channel 132
Local or End-to-End Training parameter 179
Local Training Maximum Error Tolerance parameter 178
Logical property sheet 67
LogicalID parameter 75
Loop Start Net Abandon parameter 148
Loop Start Net Abandon Signal parameter 117
Loop Start Net Answer Signal parameter 116, 147
Loop Start Net Drop Signal parameter 117, 147
Loop Start Net Flash Drop Signal parameter 118, 148
Loop Start Net Ring Off parameter 148
Loop Start Net Ring Off Signal parameter 118
Loop Start Net Ring On Signal parameter 117, 148
Loop Start PBX Close Signal parameter 116, 147
Loop Start PBX Flash Open Signal parameter 118, 147
Loop Start PBX Flash Signal parameter 119, 147
Loop Start PBX Open parameter 147
Loop Start PBX Open Signal parameter 116
Loop Start Sequence Definition parameter 120
loop start signals
 net abandon 117
 net answer 116
 net drop 117
 net flash drop 118
 net ring off 118
 net ring on 117
 PBX close 116
 PBX flash 119
 PBX flash open 118
 PBX open 116
 sequence 120
 train 119
Loop Start Train Definition parameter 119
LOSClearedTime parameter 107
low background noise threshold 99
Low Glitch parameter 155
LS_Net_Abandon parameter 148
LS_Net_Answer parameter 147
LS_Net_Drop parameter 147
LS_Net_FlashDrop parameter 148
LS_Net_RingOff parameter 148

LS_Net_RingOn parameter 148
 LS_PBX_Close parameter 147
 LS_PBX_Flash parameter 147
 LS_PBX_FlashOpen parameter 147
 LS_PBX_Open parameter 147

M

main window, DCM 14
 maximum gain 98
 Maximum Gain Limit parameter 169
 Maximum Memory Size parameter 169
 maxOrphanStrmSize parameter 66
 media loads 19
 configuration file sets 23
 DM/IP Series boards 24
 DM/V and DM/V-A Series boards 23
 features supported 19
 flexible routing
 High Density Station Interface boards 24
 Media Type (User Defined) parameter 79
 Memory Size Reset parameter 170
 minimum one's density 106
 Misc property sheet 68
 Misc property sheet display 15
 modified alternate mark inversion 105
 modifying DCM parameters 15, 58
 Mu Law
 encoding parameter 158
 Layer 1 Protocol 152

N

net abandon 117
 net answer
 ground start 124
 loop start 116
 net drop
 ground start 123
 loop start 117
 net flash drop
 ground start 124
 loop start 118
 net ground 122
 net ring off 118
 net ring on 117
 Net_Abandon parameter 117
 Net_Answer parameter 116, 124
 Net_Drop parameter 117, 123
 Net_FlashDrop parameter 118, 124
 Net_Ground parameter 122
 Net_RingOff parameter 118, 127
 Net_RingOn parameter 117

Net_RingOn parameter Ring Cadence On-time
 parameter 127
 NETREF One Clock Rate (User Defined) parameter 85
 NETREF One FRU (User Defined) parameter 84
 NETREF Two Clock Rate (User Defined) parameter 86
 NETREF Two FRU (User Defined) parameter 85
 network interface connector (NIC) 56
 Network property sheet 72
 network termination protocol 131
 NFAS 33
 CONFIG file section 31, 33
 groups 111
 parameters 110-113
 primary D channel 112
 standby D channel 113
 trunk assignment 112
 NFAS DCBU 113
 NFAS_INSTANCE_MAP parameter 111
 NFAS_PrimaryIntID parameter 112
 NFAS_Standby_IntID parameter 113
 NLP Enable parameter 174
 Noise Floor Estimate parameter 170
 noise level lower threshold 97
 Non-Facility-Associated signaling. *See* NFAS
 NotificationTone parameter, conferencing
 notification tone 103
 Number of B Channels parameter 160
 Number of Taps parameter 174
 NumChans parameter 160

O

off-hook
 ground start 121
 loop start 116
 off-hook E&M 114
 Offhook parameter 114
 on-hook
 E&M 114
 loop start 116
 Onhook parameter 114
 Online Help 15
 OperationalStatus parameter 71
 Originator Address Digits parameter 144
 Originator Prefix Digits parameter 145
 Originator Suffix Digits parameter 146
 orphanageMsgLen parameter 66
 orphanageMsgTimeout parameter 66
 orphanStrmTableSize parameter 66
 Outbound (Variant) parameter 162
 Outbound Dialing Flag parameter 139
 outbound protocol variant 162

out-of-band signaling 128
outStrmQuantum parameter 67

P

PAMD 142
PAMD Speed Value parameter 156
parameters
 See also property sheets, CONFIG file
 modifying DCM 15, 58
PassiveMode parameter 69
PBX answer 121
PBX close 116
PBX drop 122
PBX flash
 ground start 125
 loop start 119
PBX flash drop 124
PBX flash open 118
PBX ground 121
PBX release 122
PBX_Answer parameter 121
PBX_Close parameter 116
PBX_Flash parameter 119, 125
PBX_FlashDrop parameter 124
PBX_FlashOpen parameter 118
PBX_Ground parameter 121
PBX_Open parameter 116
PBX_Release parameter 122
PCD file 12
PCD files 18
 See also configuration file sets
PCDFileName parameter 70
PciBusNumber parameter 75
PciID parameter 75
PciSlotNumber parameter 75
PCMEncoding parameter 87
Physical property sheet 59, 74
Physical State parameter 72
PhysicalShelf parameter 75
PhysicalSlotNumber parameter 74
PLR Maximum Latency parameter 176
PLR Optimal Latency parameter 176
PLXAddr parameter 76
PLXlength parameter 76
PnPAutoDownload parameter 72
PolarityDetection (Polarity Flag) parameter 146
Positive Answering Machine Detection 142
Positive Voice Detection 142
PreDigitTimeout parameter 140
Pre-Recording Beep parameter 101
pre-recording beep signal 101
prerequisites to configuration 49
primary clock fallback 26
primary D channel identifier 112
Primary Instance Identifier parameter 112
Primary Lines (User Defined) parameters 81
Primary Master FRU (User Defined) parameter 83
PrimaryBoardID parameter 77
PrmAGCActive parameter 169
PrmAGCgain_inc_speech parameter 169
PrmAGCk parameter 97, 170
PrmAGCLOW_threshold parameter 170
PrmAGCmax_gain parameter 98, 169
PrmAGCMEM_max_size parameter 169
PrmAGCMEM_sil_reset parameter 170
PrmAGCnf_attfast parameter 169
PrmAGCnf_attslow parameter Slow Attack Filter Coefficient
 parameter 169
PrmCEDCadence parameter 170
PrmCNGCadenceMax parameter 171
PrmCNGCadenceMin parameter 170
PrmCNGCadenceSilence parameter 171
PrmDTMFDurationDflt parameter 172
PrmDTMFGainCtrl parameter 171
PrmDTMFOffTimeDflt parameter 173
PrmDTMFVolCtrl parameter 172
PrmDTMFXferMode parameter 173
PrmECActive parameter 173
PrmECMu parameter 174
PrmECNLPActive parameter 174
PrmECOrder parameter 174
PrmECResSpFlagEnableDisable parameter 175
PrmECSuppressGain parameter 175
PrmFaxEnable parameter 177
PrmGainCtrl parameter 175
PrmHPFActive parameter 180
PrmMaxLatPktsTx parameter 176
PrmOptLatPktsTx parameter 176
PrmRedDepth parameter 177
PrmT38BROVERRIDE parameter 178
PrmT38DFOVERRIDE parameter 177
PrmT38ECOVERRIDE parameter 177
PrmT38HSECM_SecBlocks parameter 178
PrmT38HSEOF_SecBlocks parameter 179
PrmT38HSEOT_SecBlocks parameter 179
PrmT38IndSecBlocks parameter 178
PrmT38SpoofLevel parameter 180
PrmT38TCFMethod parameter 179
PrmT38TCFThreshld parameter 178
PrmT38TxPower parameter 180

- PrmT38TxThrshld parameter 179
- PrmT38V21SecBlocks parameter 178
- PrmTOS parameter 181
- PrmVolCtrl parameter 175
- probability of silence threshold 99
- probability of speech threshold 99
- ProcessTimeout(Seconds) parameter 70
- product configuration description 12
- Product Configuration Description file 18
- property sheets
 - accessing 14
 - display of Misc property sheet 15
 - Driver 65
 - Logical 67
 - Misc 68
 - Network 59, 72
 - Physical 74
 - TDM Bus Configuration 16, 78
 - Telephony Bus 86
 - Trunk Configuration 87
 - Version 88
- protocol variants
 - assigning inbound 161
 - assigning outbound, 162
 - ISDN 150-??
 - T1 134-150
- ProtocolType parameter 136, 151
- pulse signals 37
- PVD 142

Q

- Q.931 Timer 302 parameter 129
- Q.931 Timer 303 parameter 129
- Q.931 Timer 304 parameter 129
- Q.931 Timer 305 parameter 130
- Q.931 Timer 308 parameter 130
- Q.931 Timer 310 parameter 130
- Q.931 Timer 313 parameter 130
- Q.931 timers 129-130
- Q.SIG Master/Slave protocol 131
- QSIG Master/Slave protocol 131

R

- R4 compatibility flag 133
- R4Compatibility (Flag) parameter 133
- RAI signal 108
- RAICRCCFAClearTime parameter 108
- RAICRCCFADeclareTime parameter 108
- receive signal level 60
- reconfiguring 12
- reconfiguring the system 62

- ReconnectTimeout parameter 138
- Record Duration parameter 100
- recorder CONFIG file section 30
- recorder parameters 100-101
- recording
 - duration 100
 - pre-recording beep signal 101
 - truncate buffer 101
- REDCFAClearedTime parameter 107
- REDCFADecay parameter 107
- REDCFADeclareTime parameter 107
- Redundancy parameter 177
- reference master fallback 27
- ReplyMsgTimeout parameter 70
- Residual Speech Flag parameter 175
- Resolved TDM Bus parameters 16
- resources, coupled/independent 22
- restoring default settings 62
- restrictions, routing configuration 23
- Ring Cadence Off-time parameter 127
- ring off 123
- ring on 123
- Ring_Off parameter 123
- Ring_On parameter 123
- Ringling Signal parameter 141, 156
- routing configuration restrictions 23
- routing configurations 22
 - See also* media loads
- Rx Base Gain parameter 167
- Rx Gain Max parameter 167
- Rx Gain Min parameter 166
- Rx Gain parameter 167

S

- SCbus Clock Rate (User Defined) parameter 79
- SCD file
 - configuration file sets 17
- SCR
 - concepts 32
 - parameters 98-100
- SCR (flag) parameter 101
- SCR High Background Noise Threshold parameter 100
- SCR Low Background Noise Threshold parameter 99
- SCR Silence Probability Threshold parameter 99
- SCR Speech Probability Threshold parameter 99
- SCR Trailing Silence parameter 98
- SCR_HI_THR parameter 100
- SCR_LO_THR parameter 99
- SCR_PR_SIL parameter 99
- SCR_PR_SP parameter 99

- SCR_T parameter 98
- SCS
 - duration of initial stream data parameter 96
 - High Background Noise Threshold parameter 95
 - Low Background Noise Threshold parameter 95
 - parameters 94-96
 - Silence Probability Threshold parameter 94
 - Speech Probability Threshold parameter 94, 96
 - HI_THR parameter 95
 - Initial_data parameter 96
 - LO_THR parameter 95
 - PR_SIL parameter 94
 - PR_SP parameter 94, 96
- Secondary Master FRU (User Defined) parameter 84
- SecondaryBoardID parameter 77
- sections. CONFIG file 30
- selectable ring signals, user-defined 126
- sequence signals 41
 - CAS loop start 120
- SerialNumber parameter 77
- SetId parameter 159
- setting the bus companding method for DM3
 - configurations 55
- setting the FSK signal level 59
- Signal ID 4 parameter 158
- Signal Timeout parameter 142, 157
- signaling
 - See also* CAS, CCS, clear channel, NFAS
 - out-of-band 128
- SignalingType parameter 104
- signals
 - pulse 37
 - sequence 41
 - train 39
 - transition 35
- silence compressed recording. *See* SCR
- Silence Compressed Streaming. *See* SCS.
- silence probability threshold 99
- SIT detection
 - ISDN protocol 156
 - T1 protocol 141
- SIT Signal parameter 141, 156
- Slot Identifier parameter 164
- SlotId parameter 164
- span. *See* line
- SPBKVersion parameter 88
- speech probability threshold 99
- Spoofing Level parameter 180
- SPRTKVersion parameter 88
- SRAMAddr parameter 77
- sramInQuantum parameter 67
- SRAMlength parameter 76

- sramOutQuantum parameter 67
- sramOutTimer parameter 67
- SRAMSize parameter 77
- Standard Information Tones. *See* SIT 141
- standby D channel identifier 113
- Standby Instance Identifier parameter 113
- Start Channel (StartChan) parameter 160
- starting, the system or board 63
- StartTimeout parameter 137
- StartTimeSlot parameter 86
- stopping, the system or board 62
- SubnetMask parameter 73
- Suppress Gain parameter 175
- Switch Type parameter 132
- Symmetrical Command Response Protocol parameter 131
- symmetrical data link 131
- SYMMETRICAL_LINK parameter 131
- system initialization 12, 61

T

- T1 protocol variants 134-150
- T38HSSecBlocks parameter 179
- Target Output Level parameter 170
- TargetName parameter 73
- TDM Bus Configuration property sheet 16, 78
- TDM Bus parameters 16
- TDM Bus Type (Resoved/User Defined) parameter 79
- TEI Retry Timer parameter 131
- TEI stability timer 131
- TEI Stability Timer parameter 131
- Telephony Bus property sheet 86
- terminal emulation protocol 131
- termination impedances 109
- third-party board 54
- third-party boards 49
- thresholds
 - AGC Noise Level Lower Threshold parameter 97
 - SCR high background noise 100
 - SCR low background noise 99
 - SCR silence probability 99
 - SCR speech probability 99
- timers
 - Q.931 129-130
 - TEI retry 131
 - TEI stability 131
- Tone Clamping parameter 102
- TraceEnable parameter 71
- TraceLevel parameter 71
- trailing edge, ring
 - ground start 123, 150
 - loop start 118

- trailing silence 98
- train signals 39
 - CAS loop start 119
- transfer, blind 119
- transition signals 35
- Transmit Hold Back Threshold parameter 179
- Transmit Power Level parameter 180
- transmit signal level 59
- truncate buffer 101
- Trunk Configuration property sheet 87
- trunk. *See* line
- TSC
 - CONFIG file section 31, 45
 - defineBSet parameters 159-165
 - parameters 158
- Tx Base Gain parameter 166
- Tx Gain Max parameter 166
- Tx Gain Min parameter 166
- Tx Gain parameter 166
- Type of Service parameter 181

U

- User Defined TDM Bus parameters 16
- user-defined signals
 - CAS and tone 125
 - selectable rings 126
- UserName parameter 73
- Using Compatibility Clocks (User Defined) parameter 81
- Using NETREF One (User Defined) parameter 82
- Using NETREF Two (User Defined) parameter 82
- Using Primary Master (User Defined) parameters 81
- Using Secondary Master (User Defined) parameters 82

V

- Variant Define n command 43
- Version property sheet 88
- Voice Detection Signal parameter 142, 157
- Voice Detection Timeout parameter 143, 157
- Volume Control parameter 175

W

- Width parameter 163
- Wink (Flag) parameter 136
- Wink parameter 114

Y

- YellowCFAClearTime parameter 108
- YellowCFADeclareTime parameter 108

Z

- ZeroCodeSuppression parameter 106