

# Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul – Application Topologies

Technology Brief

Mobile operator backhaul segment designs are each unique and based on several factors such as geography (urban versus rural), population density, terrain, and so on. In order to address the varying requirements of the backhaul designs, the Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul (I-Gate 4000 SBO-MB) supports a wide range of deployment strategies, including these topologies:

- Point to Point (PTP)
- Point to Multi-Point (PTMP)
- Drop and Continue
- Ring
- Data Offload

## Point to Point Topology

An I-Gate 4000 SBO-MB terminal can be installed and operated in a single destination solution using the Point to Point (PTP) topology. Such a solution can include one or more pairs of I-Gate 4000 SBO-MB terminals, where each pair of the terminals optimizes the traffic carrier between them. Figure 1 shows an example of this type of configuration.

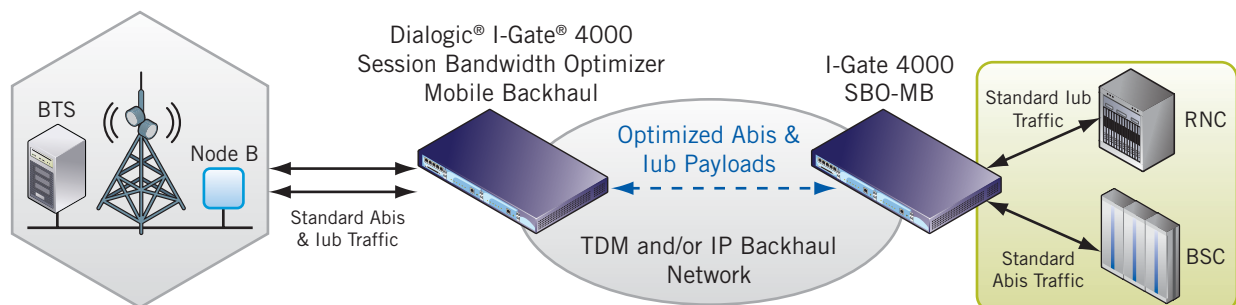


Figure 1. Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul in a Point to Point Topology

## Point to Multi-Point Topology

A Point to Multi-Point (PTMP) topology includes three or more I-Gate 4000 SBO-MB terminals, where an I-Gate 4000 SBO-MB terminal simultaneously optimizes the traffic between it and several remote I-Gate 4000 SBO-MB terminals. Figure 2 shows an example of this type of configuration.

# Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul – Application Topologies

Technology Brief

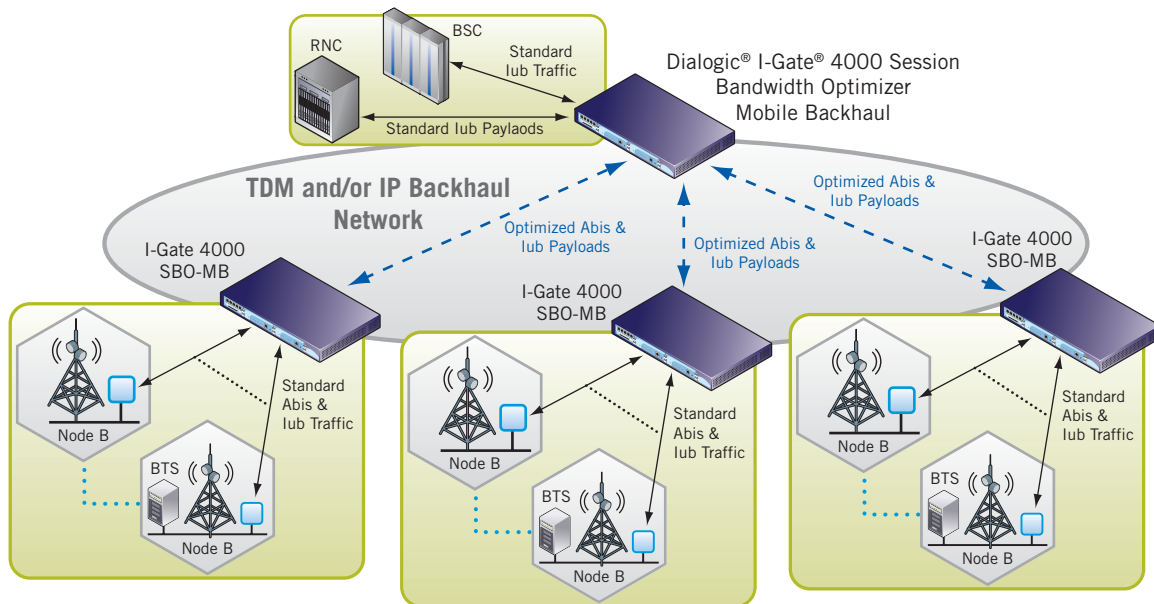


Figure 2. Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul in a Point to Multi-Point Topology

## Drop and Continue Topology

Usually Base Station Controller (BSC) and Radio Network Controller (RNC) systems are co-located at an operator MSO (Mobile Switching Office) site or at large Point of Presence (POP) sites. As a BSC system can handle tens of Base Transceiver Stations (BTSs), and an RNC system can handle hundreds of Node B Stations, typical mobile applications including 2G and 3G networks covering the same areas include more BSC systems than RNC systems, and accordingly there could be many BSC sites without collocated RNC systems.

Figure 3 shows an example of an I-Gate 4000 SBO-MB solution suitable for a scenario of the type described above where the RNC and BSC systems are deployed at different sites and control collocated BTSs and Node B sites.

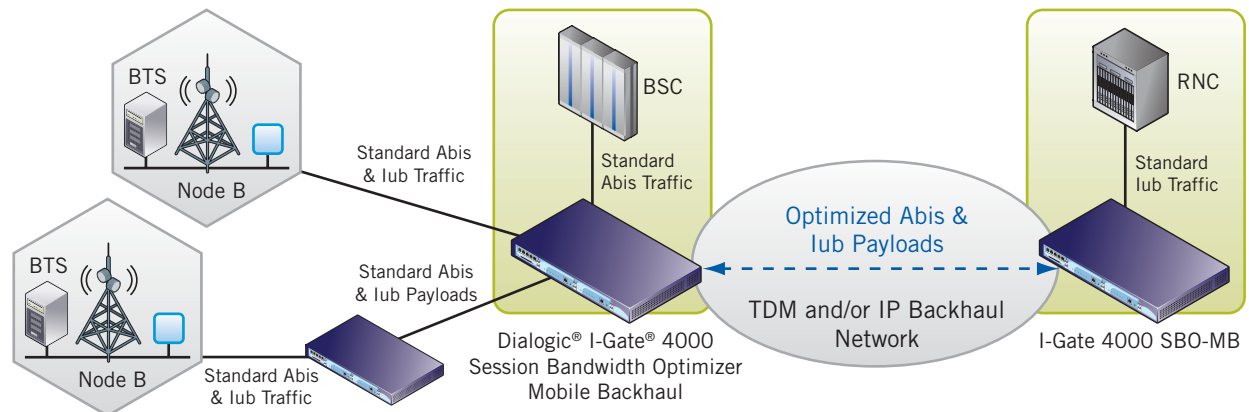


Figure 3. Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul in a Drop and Continue Topology

# Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul – Application Topologies

Technology Brief

In such a solution, the traffic is handled as follows:

- At a cell site, an I-Gate 4000 SBO-MB terminal interconnects to the BTS and performs backhaul payload optimization and aggregation for the 2G Abis traffic; and interconnects to the Node B and performs backhaul payload optimization and aggregation for the 3G Iub traffic.
- At the BSC site, the optimized 2G Abis traffic received from the BTS sites is decompressed and terminated to the BSC system. The optimized 3G Iub traffic received from the Node B sites is forwarded to the I-Gate 4000 SBO-MB terminal at the RNC site.
- The I-Gate 4000 SBO-MB terminal at the BSC site can also interconnect to other Nodes B sites and performs backhaul payload optimization and aggregation for the 3G Iub traffic.
- The optimized traffic is carried over the backhaul transport network.

## Ring Topology

Mobile networks using microwave links for the backhaul of the cell sites' traffic are challenged by high CAPEX and OPEX when required to expand transmission bandwidth and traffic-carrying capability. As these backhaul transmission links are typically built over Synchronous Digital Hierarchy (SDH) ring transmission infrastructure, expansion of traffic capacity generally demands additional transmission resources, antenna upgrading, additional radio frequencies, and modifications to the existing microwave infrastructure for both ring directions and at all radio sites. The use of an I-Gate 4000 SBO-MB based solution that optimizes the backhaul traffic end-to-end from the BSC and/or RNC sites to the BTS and/or Node B sites allows an operator to build the required network expansion while enabling significant CAPEX and OPEX savings. Figure 4 shows an example of this type of solution.

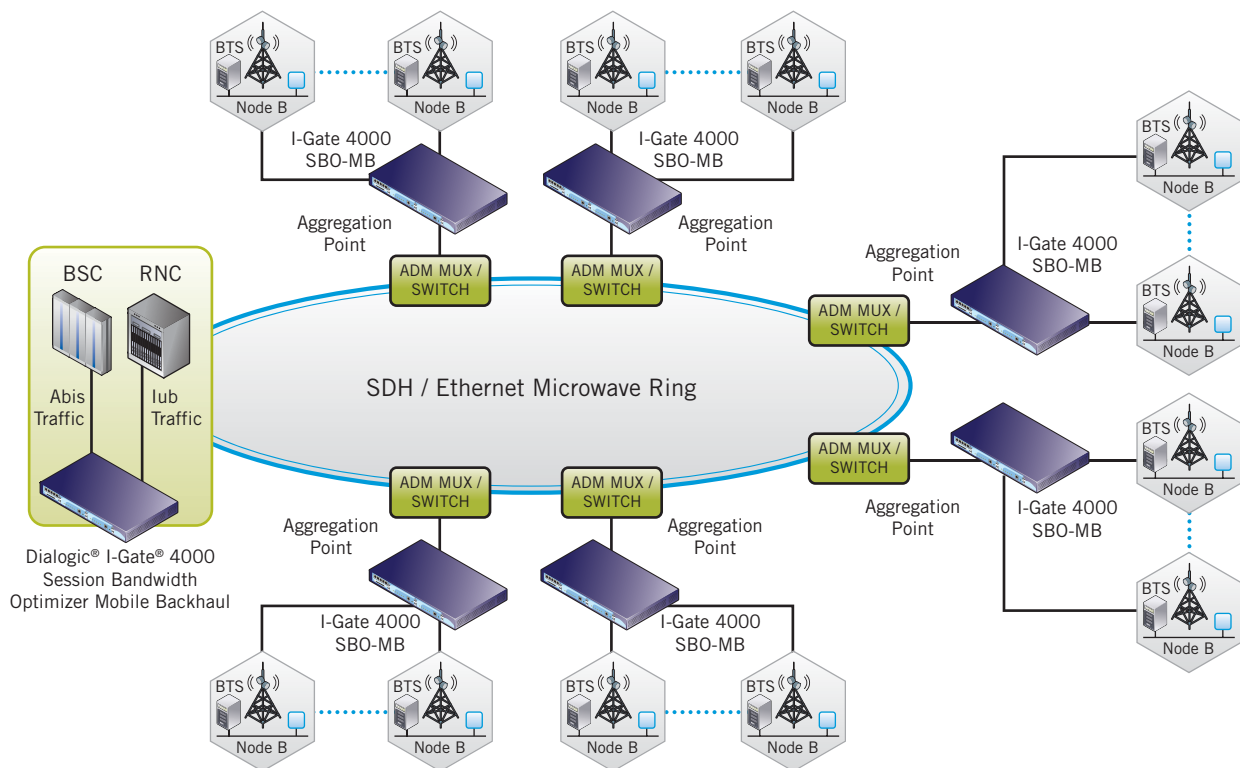


Figure 4. Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul in a Ring Topology

# Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul – Application Topologies

Technology Brief

In such a solution, the traffic is handled as follows:

- I-Gate 4000 SBO-MB terminals aggregate and optimize the various BTS and/or Node B traffic before it is transmitted to the associated Add Drop Multiplexer (ADM MUX) or switch on the SDH rings.
- At the radio controller site, the BSC and/or RNC systems are connected to I-Gate 4000 SBO-MB terminals which also interconnect to ADM MUX or switch on the SDH rings. The optimized traffic is carried over the SDH rings.

## Data Offload Topology

An I-Gate 4000 SBO-MB terminal can simultaneously support TDM and Ethernet backhaul bearer links. Continuous growth of data traffic presents challenges for operators responding to requirements for additional backhaul network transmission resources and their associated expenses.

A cost-effective solution to this can be to offload the data traffic (for example, High Speed Packet Access [HSPA]) through a best-effort packet data network while the voice traffic is transported over the existing (and more expensive) backhaul network transmission links.

Figure 5 shows an example of an I-Gate 4000 SBO-MB data offload type of solution.

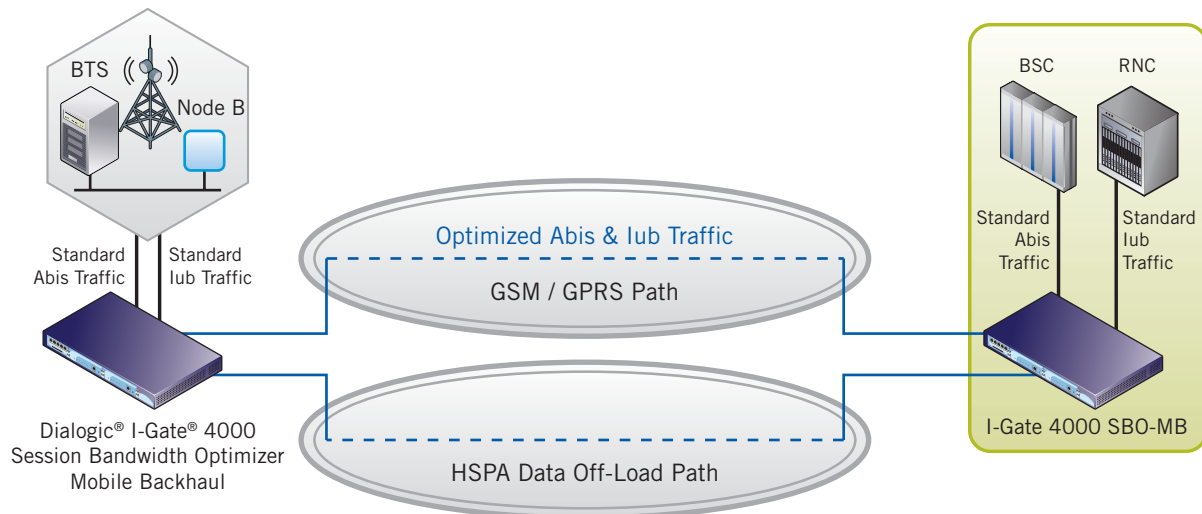


Figure 5. Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul in a Data Offload Topology

In such a solution, the traffic is handled as follows:

- At a cell site, the I-Gate 4000 SBO-MB terminal interconnects to one (or, although not shown, more) Node B systems. The same terminal could also interconnect to BTS systems.
- At the RNC site, an I-Gate 4000 SBO-MB terminal interconnects to the RNC system. The same terminal could also interconnect to a BSC system.
- An I-Gate 4000 SBO-MB terminal separates the HSPA traffic from the Iub stream and transports the HSPA traffic over a broadband IP network (for example, a DSL network), while the other traffic types are transported over a separate TDM/MPLS/Ethernet network.
- The optimized traffic is carried over the backhaul transport network.

# Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul – Application Topologies

Technology Brief

## Acronyms

<b>ADM-MUX</b>	Add Drop Multiplexer
<b>BSC</b>	Base Station Controller
<b>BTS</b>	Base Transceiver Site
<b>CAPEX</b>	Capital Expenditure
<b>GSM/GPRS</b>	Global System for Mobile/General Packet Radio Service
<b>HSPA</b>	High Speed Packet Access
<b>MSO</b>	Mobile Switching Office
<b>OPEX</b>	Operating Expense
<b>POP</b>	Point of Presence
<b>PTMP</b>	Point to Multi-Point
<b>PTP</b>	Point to Point
<b>RNC</b>	Radio Network Controller
<b>SBO-MB</b>	Session Bandwidth Optimizer Mobile Backhaul
<b>SDH</b>	Synchronous Digital Hierarchy

## Questions?

If you have questions about the technology or Dialogic® products discussed in this technology brief, [contact](#) your local Dialogic representative.

Detailed information is also available on the Dialogic website for this product:

“[Dialogic® I-Gate® 4000 Session Bandwidth Optimizer Mobile Backhaul](#)” datasheet.



[www.dialogic.com](http://www.dialogic.com)

**Dialogic Inc.**  
926 Rock Avenue  
San Jose, California 95131  
USA

Dialogic and I-Gate are registered trademarks of Dialogic Inc. and its affiliates or subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at the address provided above. The names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided herein forms part of the specifications of the product(s) and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided hereunder.

Any use case(s) shown and/or described herein represent one or more examples of the various ways, scenarios or environments in which Dialogic® products can be used. Such use case(s) are non-limiting and do not represent recommendations of Dialogic as to whether or how to use Dialogic products.

Dialogic may make changes to specification, product descriptions, and plans at any time, without notice.