


## Diallogic® D/41JCT-LS Media Board

The Diallogic® D/41JCT-LS Media Board is a 4-port analog converged communications board that supports voice, fax, and software-based speech recognition processing in a single PCI or PCI Express slot, providing four (4) analog telephone interface circuits for direct connection to analog loop start lines.

Diallogic® JCT Media Boards – including this model - can be used by developers to provide small- and medium-sized enterprise Computer Telephony (CT) applications that require high-performance voice and fax processing. Among the features and benefits of this model, and other Diallogic® JCT Media Boards, are the following. They use Digital Signal Processor (DSP) voice processing technology, making them well-suited for server-based CT systems under Windows and Linux. They also provide a powerful platform for creating sophisticated Interactive Voice Response (IVR) applications for the small and medium-sized enterprise market segments. Their Caller ID support lets applications, such as IVR, receive calling party information via a telephone trunk line; Caller ID is supported for North America (CLASS protocol), the United Kingdom (CLI protocol), and in Japan (CLIP protocol). Features such as fax and software-based speech recognition processing enable unified messaging applications. They also provide Automatic Gain Control (AGC), so even a weak telephone signal can be recorded and replayed with clarity.

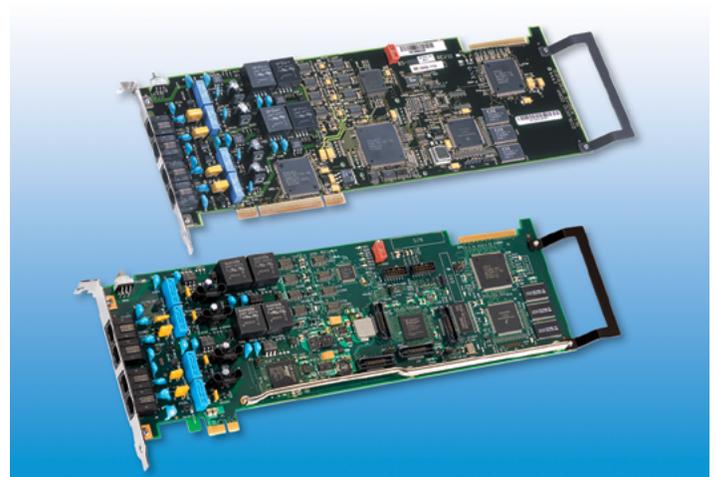

### Features

**CT or H.100 bus connectivity**

**Supports Continuous Speech Processing (CSP)**

**Supports up to four (4) channels of DSP-based on-board fax**

**Separate models available with Universal PCI or PCI Express edge connector**

**A-law or  $\mu$ -law voice coding at dynamically selectable data rates, 24 kbit/s to 64 kbit/s, selectable on a channel-by-channel basis**

**Telcordia CLASS, UK CLI, Japanese Caller ID, and other international protocols**

**Advanced outbound call progress analysis**

### Benefits

Enables an application to switch calls to or from other resources

Provides a flexible speech processing technology, which, when coupled with efficient drivers, off-loads critical real-time signal processing in speech-enabled applications to on-board DSPs. Reduces system latency, increases recognition accuracy, and improves overall system response time for high-density speech solutions.

Reduces the number of boards per system

Universal PCI form factor compatible with 3.3 V and 5.0 V bus signals; and PCI Express form factor compatible with x1 lane configuration or higher

Allows for a beneficial tradeoff between disk storage and voice quality

Supports international Caller ID capability via on-hook audio path

Monitors outgoing call status quickly and accurately



## Technical Specifications

Number of ports	4
Maximum boards per system	8
CT Bus loads per board	1
Maximum CT Bus loads per system	20
Analog network interface	4 on-board loop start interface circuits
Resource sharing bus	CT Bus H.100
Control processor	80C186 @ 34.8 MHz
Digital signal processor	Freescale DSP56303 @ 100 MHz, with 128Kx24 private SRAM
Supported operating systems	Linux, Windows: Details at <a href="http://www.dialogic.com/systemreleases">http://www.dialogic.com/systemreleases</a>
CSP	Yes
FAX	Yes
Signaling	Analog loop start

### Host Interface — PCI and PCI Express

Bus compatibility	PCI: Complies with PCI-SIG Bus Specification, Rev. 2.2 PCIe: Complies with PCI-SIG PCI Express Base Specification, Rev. 1.1; x1 or higher compatible
PCI Bus speed	33 MHz maximum
PCI Bus mode	Target mode operation only
Shared memory	32 KB page
Interrupt	PCI; 1 IRQ (INTA) shared by Dialogic® JCT Media Boards PCIe; Legacy INTA emulation shared by Dialogic® JCT PCIe Media Boards
I/O ports	None

### Physical Dimensions

Standard-height, full-length form factor	12.3 in. (31.24 cm) long without edge retainer, or 13.3 in. (33.78 cm) long with edge retainer
	0.79 in. (2 cm) wide (total envelope)
	3.87 in. (9.83 cm) high (excluding edge connector)

### Power Requirements — PCI

+5 VDC	750 mA maximum
+12 VDC	200 mA maximum
-12 VDC	100 mA maximum

### Power Requirements — PCI Express

+12 VDC	450 mA maximum
---------	----------------

### Environmental Requirements — PCI and PCI Express

Operating temperature	+32°F (0°C) to +122°F (+50°C)
Storage temperature	-4°F (-20°C) to +158°F (+70°C)
Humidity	8% to 80% noncondensing

**Telephone Interface†**

Trunk type	Loop start
Impedance	600 Ohms nominal
Ring detection	15 Vrms minimum, 13 Hz to 68 Hz, (each configurable by parameter*)
Loop current range	20 mA to 120 mA
Echo return loss	Configurable by software parameter
Crosstalk coupling	Less than -70 dB at 1 kHz channel to channel
Receive signal/noise ratio	70 dB referenced to -15 dBm
Frequency response	200 Hz to 3400 Hz ±3 dB (transmit and receive)
Connector	4 RJ-11 type

**Reliability**

Estimated MTBF	Per Telcordia Method 1 PCI: 274,000 hours PCI Express: 230,000 hours
----------------	--

**Approvals, Compliance, Warranty**

Environmental Information	<a href="http://www.dialogic.com/en/company/environmental-policy.aspx">http://www.dialogic.com/en/company/environmental-policy.aspx</a>
Country-specific safety and telecom approvals	<a href="http://www.dialogic.com/en/products/others/declarations.aspx">http://www.dialogic.com/en/products/others/declarations.aspx</a>
Warranty information	<a href="http://www.dialogic.com/warranties">http://www.dialogic.com/warranties</a>

† Average speech mandates +16 dB peaks above average and preserves -13 dB valleys below average.

\* Analog levels: 0 dBm0 corresponds to a level of +3 dBm at tip-ring analog point. Values vary depending on country requirements; contact your Dialogic account manager.

**Springware/JCT Technical Specifications****Facsimile**

Fax compatibility	ITU-T G3 compliant (T.4, T.30) ETSI NET/30 compliant
Maximum Data rate	14.4 kbit/s (v.17) send 9.6 kbit/s (v.29) receive
Variable speed selection	Automatic step-down to 12,000 bit/s, 9600 bit/s, 7200 bit/s, 4800 bit/s, and lower
Transmit data modes	Modified Huffman (MH) Modified Read (MR)
Receive data modes	MH, MR
File data formats	Tagged Image File Format-Fax (TIFF-F) for transmit/receive MH and MR
ASCII-to-fax conversion	Host-PC-based conversion Direct transmission of text files Windows fonts supported Page headers generated automatically
Error correction	Detection, reporting, and correction of faulty scan lines
Image widths	1728 pixels 2048 pixels 2432 pixels

Image scaling	Automatic horizontal and vertical scaling between page sizes
Polling modes	Normal Turnaround
Image resolution	Normal (203 pels/in. × 98 lines/in.; 203 pels/2.54 cm × 98 lines/2.54 cm) Fine (203 pels/in. × 196 lines/in.; 203 pels/2.54 cm × 196 lines/2.54 cm)
Fill minimization	Automatic fill bit insertion and stripping
<b>Audio Signal</b>	
Receive range	−40 dBm to +2.5 dBm0 nominal, configurable by parameter**
Automatic gain control	Application can enable/disable Above −18 dBm0 results in full-scale recording, configurable by parameter**
Silence detection	−40 dBm nominal, software adjustable**
Transmit level (weighted average)	−9.5 dBm0 nominal, configurable by parameter**
Transmit volume control	40 dB adjustment range, with application-definable increments, capped according to country-specific regulations
<b>Frequency Response</b>	
24 kbit/s	300 Hz to 2600 Hz ±3 dB
32 kbit/s	300 Hz to 3400 Hz ±3 dB
48 kbit/s	300 Hz to 2600 Hz ±3 dB
64 kbit/s	300 Hz to 3400 Hz ±3 dB
<b>Audio Digitizing</b>	
13 kbit/s	GSM 6.10 @ 8 kHz sampling
24 kbit/s	4-bit OKI ADPCM @ 6 kHz sampling
32 kbit/s	4-bit OKI ADPCM @ 8 kHz sampling
32 kbit/s	G.726 @ 8 kHz sampling
48 kbit/s	G.711 μ-law PCM @ 6 kHz sampling
64 kbit/s	G.711 μ-law PCM @ 8 kHz sampling
Digitization selection	Selectable by application on function call-by-call basis Adjustable through application or programmable DTMF control
<b>DTMF Tone Detection</b>	
DTMF digits	0 to 9, *, #, A, B, C, D per Telcordia LSSGR Sec 6
Dynamic range	−38 dBm0 to −3 dBm0 per tone, configurable by parameter**
Minimum tone duration	40 ms, can be increased with software configuration
Interdigit timing	Detects like digits with a >40 ms interdigit delay Detects different digits with a 0 ms interdigit delay
Twist and frequency variation	Meets Telcordia LSSGR Sec 6 and EIA 464 requirements
Noise tolerance	Meets Telcordia LSSGR Sec 6 and EIA 464 requirements for Gaussian, impulse, and power line noise tolerance
Cut-through	Local echo cancellation permits 100% detection with a >4.5 dB return loss line
Talk-off	Detects less than 20 digits while monitoring Telcordia TR-TSY-000763 standard speech tapes (LSSGR requirements specify detecting no more than 470 total digits) Detects zero (0) digits while monitoring MITEL speech tape #CM 7291

### Global Tone Detection

Tone type	Programmable for single or dual
Maximum number of tones	Application-dependent
Frequency range	Programmable within 300 Hz to 3500 Hz
Maximum frequency deviation	Programmable in 5 Hz increments
Frequency resolution	± 5 Hz. Separation of dual-frequency tones is limited to 62.5 Hz at a signal-to-noise ratio of 20 dB
Timing	Programmable cadence qualifier, in 10 ms increments
Dynamic range	Programmable, default set at -6 dBm0 to -3 dBm0 per tone

### Global Tone Generation

Tone type	Generate single or dual tones
Frequency range	Programmable within 200 Hz to 4000 Hz
Frequency resolution	1 Hz
Duration	10 ms increments
Amplitude	Programmable within -43 dBm0 to -3 dBm0 per tone

### MF Signaling

MF digits	0 to 9, KP, ST, ST1, ST2, ST3 per Telcordia LSSGR Sec 6, TR-NWT-000506 and ITU-T Q.321
Transmit level	Complies with Telcordia LSSGR Sec 6, TR-NWT-000506
Signaling mechanism	Complies with Telcordia LSSGR Sec 6, TR-NWT-000506
Dynamic range for detection	-25 dBm0 to -3 dBm0 per tone
Acceptable twist	6 dB
Acceptable frequency variation	Less than ±1 Hz

### Call Progress Analysis

Busy tone detection	
Ring back tone detection	
Positive voice detection	
Positive answering machine detection	
Fax/modem detection	
Intercept detection	
Dial tone detection before dialing	

### Tone Dialing

DTMF digits	0 to 9, *, #, A, B, C, D per Telcordia LSSGR Sec 6, TR-NWT-000506
Frequency variation	Less than ±1 Hz
Rate	10 digits/s maximum, configurable by parameter**
Level	-4.0 dBm0 per tone, nominal, configurable by parameter**

### Pulse Dialing

10 digits	0 to 9
Pulsing rate	10 pulses/s, nominal 20 pulses/s for Japan, configurable by parameter**
Break ratio	60% nominal, configurable by parameter**

## Analog Caller Identification

Applicable standards	Telcordia TR-NWT-000030 Telcordia TR-NWT-000031 Telcordia TR-NWT-001188 TAS T5 PSTN1 ACLIP: 1994 (Singapore)
Modem standard	Bell 202 or V.23, serial 1200 bits/sec (simplex FSK signaling)
Receive sensitivity	-48 dBm (-50 dBv) to -1 dBm
Noise tolerance	Minimum 18 dB SNR over 0 to -48 dBm dynamic range
Data formats	Single Data Message (SDM) and Multiple Data Message (MDM) formats via API calls and commands
Line impedance	AC coupled 600 Ohm (@ 1.8 kHz) termination during Caller ID on-hook detection interval
Message formats	ASCII or binary SDM, MDM message content

## Analog Display Services Interface (ADSI)

FSK generation per Telcordia TR-NWT-000030  
CAS tone generation and DTMF detection per Telcordia TR-NWT-001273

*\*\* Analog levels: 0 dBm0 corresponds to a level of +3 dBm at tip-ring analog point. Values vary depending on country requirements; contact your account manager.*

## Ordering Information

Please see the [Ordering Information](#) tab for this product.

# Dialogic®

[www.dialogic.com](http://www.dialogic.com)

For a list of Dialogic offices and locations, please visit: <https://www.dialogic.com/contact.aspx>

Dialogic is a registered trademark of Dialogic Corporation and its affiliates or subsidiaries ("Dialogic"). Dialogic's trademarks may be used publicly only with permission from Dialogic. Such permission may only be granted by Dialogic's legal department at 6700 Cote-de-Liesse Road, Suite 100, Borough of Saint-Laurent, Montreal, Quebec, Canada H4T 2B5. The names of actual companies and products mentioned herein are the trademarks of their respective owners.

Dialogic encourages all users of its products to procure all necessary intellectual property licenses required to implement their concepts or applications, which licenses may vary from country to country. None of the information provided in this Datasheet other than what is listed under the section entitled Technical Specifications forms part of the specifications of the product and any benefits specified are not guaranteed. No licenses or warranties of any kind are provided under this datasheet.

Dialogic may make changes to specifications, product descriptions, and plans at any time, without notice.

Any use case(s) shown and/or described herein represent one or more examples of the various ways, scenarios or environments in which Dialogic® products can be used. Such use case(s) are non-limiting and do not represent recommendations of Dialogic as to whether or how to use Dialogic products.

**Positive Answering Machine Detection/Positive Voice Detection**

These performance results were measured using specific computer systems and/or components within specific lab environments and under specific system configurations. Any difference in system hardware, software design, or configuration may affect actual performance. The results are furnished for informational use only and should not be construed as a commitment by Dialogic. Dialogic assumes no responsibility or liability for any errors or inaccuracies.

**Outbound Dialing/Telemarketing**

Outbound dialing systems may be subject to certain laws or regulations. Dialogic makes no representation that Dialogic products will satisfy the requirements of any such laws or regulations (including, without limitation, any regulations dealing with telemarketing).

